

## **Technical data sheet** Multiple light beam safety device receiver

Part no.: 66575200 MLD535-R3LM



The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2023-03-29

## **Technical data**

# Leuze

Series	MLD 500
Device type	Receiver
Special version	
Special version	Integrated muting indicator
	Integrated status indicator
	Reflective element for laser alignment aid
Functions	
Functions	Alternative connection for second muting signal
	Configuration by means of wiring
	Contactor monitoring (EDM), selectable
	Muting enable function
	Muting-timeout extension
	Partial muting
	Sequence controlled 2-sensor muting
	Start/restart interlock (RES)
	Timing controlled 4-sensor muting
Reflective element for laser alignment aid	Yes
Integrated muting indicator	Yes
Integrated status indicator	Yes
Characteristic parameters	
Туре	4, IEC/EN 61496
SIL	3, IEC 61508
SILCL	3, IEC/EN 62061
Performance Level (PL)	e, EN ISO 13849-1
MTTF <sub>d</sub>	204 years, EN ISO 13849-1
PFH <sub>D</sub>	6.6E-09 per hour
Mission time T <sub>M</sub>	20 years, EN ISO 13849-1
Category	4, EN ISO 13849
Optical data	
Number of beams	3 Piece(s)
Beam spacing	400 mm
Electrical data	
Selection of operating mode	Connection 1, pin 2: +24 V for operating mode 1, 2, 4
	Connection 1, pin 2: 0 V for operating mode 3, 5, 6
	Connection 1, pin 7: +24 V for operating mode 3, 5, 6
	Connection 1, pin 7: 0 V for operating mode 1, 2, 4
Protective circuit	Overvoltage protection
	Short circuit protected
Performance data	
Supply voltage U <sub>B</sub>	24 V, DC, -20 20 %
	150 mA, Without external load
Current consumption, max.	
Current consumption, max. Fuse	External with max. 3 A
Fuse	External with max. 3 A
-	External with max. 3 A 4 Piece(s)

Switching inputs	
Туре	Digital switching input
Switching voltage high, min.	18.2 V
Switching voltage low, max.	2.5 V
Switching voltage, typ.	23 V
Voltage type	DC
Switching current, max.	5 mA
Digital switching input 1	
Assignment	Connection 1, pin 1
Function	Control input for start/restart interlock (RES)
Digital switching input 2	
Assignment	Connection 1, pin 3
Function	Control input for contactor monitoring (EDM)
Digital switching input 3	
Assignment	Connection 1, pin 4
Function	Control input, second muting signal
Digital switching input 4	
Assignment	Connection 1, pin 8
Function utputs	Control input, muting enable/ timeout
umber of safety-related switching	2 Piece(s)
itputs (OSSDs)	
utputs (OSSDs) umber of digital switching outputs	1 Piece(s)
umber of digital switching outputs	
umber of digital switching outputs Safety-related switching outp	uts
umber of digital switching outputs Safety-related switching outp Type	
umber of digital switching outputs Safety-related switching outp Type Switching voltage high, min.	uts Safety-related switching output OSSD 18.2 V
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max.	uts Safety-related switching output OSSD 18.2 V 2.5 V
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.002 mA
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.02 mA 1 V
Safety-related switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.02 mA 1 V
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching outputs	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 μH 0.3 μF 0.2 mA 0.002 mA 1 V tput 1
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching our Assignment	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching out Assignment Switching element	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Safety-related switching ou	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Safety-related switching ou Assignment	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching element	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5 Transistor, PNP
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching element Switching element Switching outputs Type	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5 Transistor, PNP
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching ou Assignment Switching element Switching element Switching element Type Switching voltage high, min.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5 Transistor, PNP
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching out Assignment Switching element Switching element Switching outputs Type Switching voltage high, min. Switching voltage low, max.	uts Safety-related switching output OSSD 18.2 V 2.5 V 23 V DC 380 mA 2,200,000 µH 0.3 µF 0.2 mA 0.002 mA 1 V tput 1 Connection 1, pin 6 Transistor, PNP tput 2 Connection 1, pin 5 Transistor, PNP Digital switching output 18.2 V 2.5 V
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching out Assignment Switching element Switching element Switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type	uts         Safety-related switching output OSSD         18.2 V         2.5 V         23 V         DC         380 mA         2,200,000 µH         0.3 µF         0.2 mA         0.002 mA         1 V         tput 1         Connection 1, pin 6         Transistor, PNP         tput 2         Connection 1, pin 5         Transistor, PNP         Digital switching output         18.2 V         2.5 V         23 V
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching out Assignment Switching element Switching element Switching outputs Type Switching voltage high, min. Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching output 1	uts         Safety-related switching output OSSD         18.2 V         2.5 V         23 V         DC         380 mA         2,200,000 µH         0.3 µF         0.2 mA         0.002 mA         1 V         tput 1         Connection 1, pin 6         Transistor, PNP         tput 2         Connection 1, pin 5         Transistor, PNP         Digital switching output         18.2 V         2.5 V         23 V         DC
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, typ. Voltage drop Safety-related switching out Assignment Switching element Switching element Switching outputs Type Switching voltage high, min. Switching voltage low, max. Switching voltage low, max. Switching voltage, typ. Voltage type Switching output 1 Assignment Switching output 1 Assignment	uts         Safety-related switching output OSSD         18.2 V         2.5 V         23 V         DC         380 mA         2,200,000 µH         0.3 µF         0.2 mA         0.002 mA         1 V         tput 1         Connection 1, pin 6         Transistor, PNP         tput 2         Connection 1, pin 5         Transistor, PNP         Digital switching output         18.2 V         2.5 V         23 V         DC         Connection 1, pin 1
Safety-related switching outputs Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Current load, max. Load inductivity Load capacity Residual current, max. Residual current, max. Residual current, typ. Voltage drop Safety-related switching out Assignment Switching element Switching element Switching outputs Type Switching voltage high, min. Switching voltage high, min. Switching voltage low, max. Switching voltage, typ. Voltage type Switching output 1	uts           Safety-related switching output OSSD           18.2 V           2.5 V           23 V           DC           380 mA           2,200,000 μH           0.3 μF           0.2 mA           0.002 mA           1 V           tput 1           Connection 1, pin 6           Transistor, PNP           tput 2           Connection 1, pin 5           Transistor, PNP           Digital switching output           18.2 V           2.5 V           23 V           DC

 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 We reserve the rig

 The Sensor People
 In der Braike 1, 73277 Owen
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 we reserve the rig

We reserve the right to make technical changes

## **Technical data**

#### Time behavior

Response time	50 ms	
Restart delay time	100 ms	
Connection		
Number of connections	2 Piece(s)	
Connection 1		
Function	Machine interface	
Type of connection	Connector	
Thread size	M12	
Material	Metal	
No. of pins	8 -pin	
Connection 2		
Function	Local interface	
Type of connection	Connector	
Thread size	M12	
Material	Metal	
No. of pins	8 -pin	
Cable properties Permissible conductor cross	0.25 mm <sup>2</sup>	
section, typ.	0.25 111112	
Length of connection cable, max.	100 m	
Permissible cable resistance to	200 Ω	
load, max.		
Mechanical data		
Dimension (W x H x L)	52 mm x 900 mm x 64.7 mm	
Housing material	Metal	
Metal housing	Aluminum	
Lens cover material	Plastic / PMMA	
Material of end caps	Diecast zinc	
Net weight	2,000 g	
Housing color	Yellow, RAL 1021	
Type of fastening	Groove mounting	

Swivel mount

Type of display	7-segment display		
	Integrated muting indicator		
	LED		
Number of LEDs	2 Piece(s)		
Environmental data			
Ambient temperature, operation	-30 55 °C		
Ambient temperature, storage	-40 75 °C		
Relative humidity (non-condensing)	0 95 %		
Certifications			
Degree of protection	IP 67		
Protection class	Ш		
Certifications	c CSA US		
	c TÜV NRTL US		
	TÜV Süd		
US patents	US 6,418,546 B		
	US 7,741,595 B		
Classification			
Customs tariff number	85365019		
ECLASS 5.1.4	27272703		
ECLASS 8.0	27272703		
ECLASS 9.0	27272703		
ECLASS 10.0	27272703		
ECLASS 12.0	27272703		
ECLASS 13.0	27272703		
ETIM 5.0	EC001832		
ETIM 6.0	EC001832		
ETIM 7.0	EC001832		

EC001832


**Operation and display** 

ETIM 8.0

Leuze

## **Dimensioned drawings**

All dimensions in millimeters

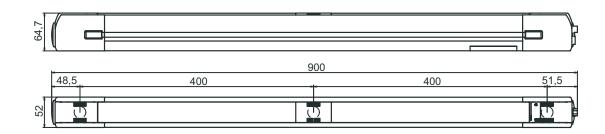

## **Electrical connection**

## Leuze


#### **Connection 1**

Function	Machine interface
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

#### Pin Pin assignment

#### **Conductor color**


1	RES/OSSD status signal	White
2	VIN	Brown
3	EDM	Green
4	MS2	Yellow
5	OSSD2	Gray
6	OSSD1	Pink
7	VIN	Blue
8	M-EN/TO	Red



#### **Connection 2**

Function	Local interface
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

Pin	Pin assignment	Conductor color
1	MS4	White
2	+24 V	Brown
3	MS2	Green
4	MS1	Yellow
5	RES/LMP	Gray
6	MS3	Pink
7	0 V	Blue
8	n.c.	Red



## **Operation and display**

LED	Display	Meaning
1	Red, continuous light	OSSD off.
	Green, continuous light	OSSD on
	Red, flashing, 1 Hz	External error
	Red, flashing, 10 Hz	Internal error
	Green, flashing, 1 Hz	Weak signal, device not optimally aligned or soiled.
2	Yellow, continuous light	Start/restart interlock locked.

## Suitable transmitters



	Part no.	Designation	Article	Description
E	66502200	MLD500-T3L	Multiple light beam safety device transmitter	Special version: Integrated laser alignment aid Operating range: 0.5 50 m Number of beams: 3 Piece(s) Beam spacing: 400 mm Connection: Connector, M12, Metal, 5 -pin

### Part number code

MLD	Multiple light beam safety device
x	<b>Series</b> 3: MLD 300 5: MLD 500
уу	Function classes 00: transmitter 10: automatic restart 12: external testing 20: EDM/RES 30: muting 35: timing controlled 4-sensor muting
z	Device type T: transmitter R: receiver RT: transceiver xT: transmitter with high range xR: receiver for high range
а	Number of beams
b	Option L: integrated laser alignment aid (for transmitter/receiver) M: integrated status indicator (MLD 320, MLD 520) or integrated status and muting indicator (MLD 330, MLD 335, MLD 510/A, MLD 530, MLD 535) E: Connection socket for external muting indicator (AS-i models only)
/t	Safety-related switching outputs (OSSDs), connection technology -: transistor output, M12 plug A: Integrated AS-i interface, M12 plug, (safety bus system)
N	lote
<b>()</b>	A list with all available device types can be found on the Leuze website at www.leuze.com.

## Accessories

## Connection technology - Connection cables

 Part no.	Designation	Article	Description
50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

## Accessories



## Mounting technology - Swivel mounts

 Part no.	Designation	Article	Description
560340	BT-SET-240BC	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal Shock absorber: No
540350	BT-SET-240BC-E	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 240° Material: Metal, Plastic Shock absorber: No

## Services

 Part no.	Designation	Article	Description
S981050	CS40-I-140	Safety inspection	Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
S981046	CS40-S-140	Start-up support	Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.

Note

A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.