

Technical data sheet

Stationary 2D-code reader

Part no.: 50154401

DCR108iADJ-0608-312-R3M-F001

Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes



For illustration purposes only

CE **RS232** Ethernet

Technical data

Basic data

Series	DCR 100i
Chip	CMOS (Global Shutter)

Functions

Software functions	Reading of 1D codes
	Reading of 2D codes

Read data

Code types, readable	2/5 Hong Kong
	2/5 IATA
	2/5 Interleaved
	Aztec
	Codabar
	Code 128
	Code 32
	Code 39
	Code 93
	Composite Codes
	Data Matrix Code
	EAN 8/13
	GS1 Databar Expanded
	GS1 Databar Expanded Stacked
	GS1 Databar Limited
	GS1 Databar RSS 14
	GS1 Databar RSS 14 Stacked
	Maxicode
	Micro QR
	MSI Plessey
	PDF417
	PDF417 Micro
	Pharma Code
	QR code
	UPC-A
	UPC-E

Optical data

Reading distance	40 ... 550 mm
Light source	LED, Red
Camera resolution, horizontal	1,080 px
Camera resolution, vertical	1,280 px
Focal length	6 mm
Modulus size	0.08 ... 0.5 mm
Camera type	Monochrome
Focus	Manually adjustable

Electrical data

Protective circuit	Overload protection
Performance data	
Supply voltage U_B	12 ... 28 V, DC
Inputs	
Number of digital switching inputs	1 Piece(s)

Switching inputs

Type	Digital switching input
Voltage type	DC
Switching principle	PNP/NPN (Opto-coupled transistor (Switching element))

Outputs

Number of digital switching outputs	2 Piece(s)
-------------------------------------	------------

Switching outputs

Type	Digital switching output
Voltage type	DC
Switching current, max.	100 mA

Switching output 1

Switching element	Opto-coupled transistor
Switching principle	NPN

Switching output 2

Switching element	Opto-coupled transistor
Switching principle	NPN

Interface

Type	RS 232, Ethernet
------	------------------

RS 232

Function	Process
Transmission speed	9,600 ... 230,400 Bd
Data format	Adjustable
Start bit	1
Data bit	8
Stop bit	1
Parity	None
Data encoding	ASCII
	Binary

Ethernet

Architecture	Client
	Server
Address assignment	DHCP
	Manual address assignment
Transmission speed	10 Mbit/s
	100 Mbit/s
Function	Process
Switch functionality	None
Transmission protocol	TCP/IP , UDP, Modbus TCP

Connection

Number of connections	1 Piece(s)
-----------------------	------------

Connection 1

Function	Data interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Type	Female
Material	Metal
No. of pins	12 -pin
Encoding	A-coded

Technical data

Mechanical data

Design	Cubic
Dimension (W x H x L)	44 mm x 29 mm x 53 mm
Housing material	Metal
Metal housing	Aluminum
Lens cover material	Glass
Net weight	150 g
Housing color	Silver
Type of fastening	Mounting thread
	Via optional mounting device

Operation and display

Type of display	LED
Number of LEDs	5 Piece(s)
Type of configuration	Configuration codes
	Software
	Teach-in
Operational controls	Button(s)
Function of the operational control	Resetting to factory settings
	Trigger
	Tune

Environmental data

Ambient temperature, operation	0 ... 50 °C
Ambient temperature, storage	-30 ... 70 °C
Relative humidity (non-condensing)	5 ... 95 %

Certifications


Degree of protection	IP 64
Protection class	III
Test procedure for EMC in accordance with standard	FCC 15-CFR 47 Part 15 Limits Class B
	IEC 61000-4-2
	IEC 61000-4-3
	IEC 61000-4-8

Classification

Customs tariff number	84719000
ECLASS 5.1.4	27280103
ECLASS 8.0	27280103
ECLASS 9.0	27280103
ECLASS 10.0	27280103
ECLASS 11.0	27280103
ECLASS 12.0	27280103
ECLASS 13.0	27280103
ECLASS 14.0	27280103
ECLASS 15.0	27280103
ETIM 5.0	EC002550
ETIM 6.0	EC002999
ETIM 7.0	EC002999
ETIM 8.0	EC002999
ETIM 9.0	EC002999
ETIM 10.0	EC002999

Dimensioned drawings

All dimensions in millimeters

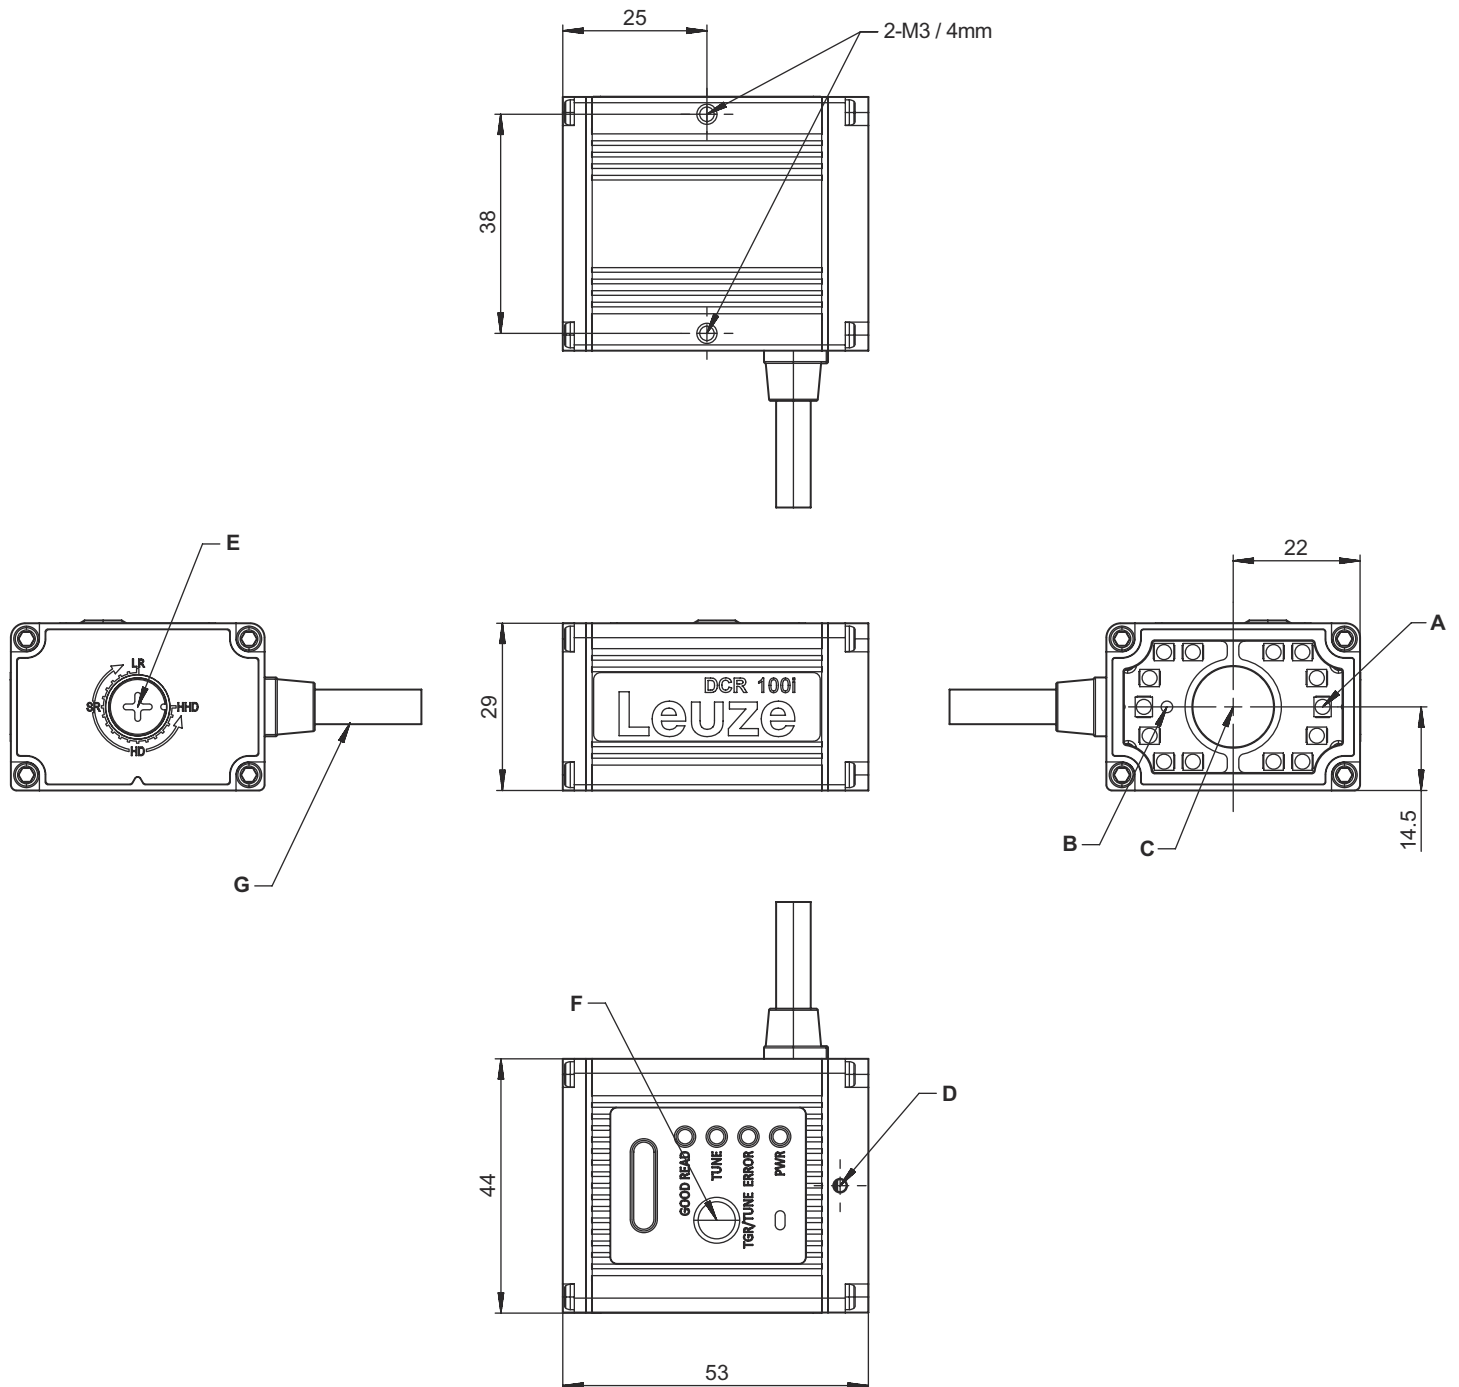

A Integrated LED for illumination (red light)

B Integrated target Laser diode (red)

C Center of optical axis

D Locking screw for focus adjustment (1.27mm Hex)

E Screw for focus adjustment

LR: Long range

SR: Standard range

HD: High density

HHD: Hyper High density

F Trigger/Tune button


G Cable with M12 12-pin female connector

Electrical connection

Connection 1


Function	Data interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Type	Female
Material	Metal
No. of pins	12 -pin
Encoding	A-coded

Pin	Pin assignment
1	RS 232 TxD
2	SWOUT 1 (No read)
3	FE
4	Trigger IN
5	SWOUT 2 (Good read)
6	GND
7	RS 232 RxD
8	Tx+
9	Tx-
10	V+
11	Rx-
12	Rx+



Diagrams

Reading distances (typical)

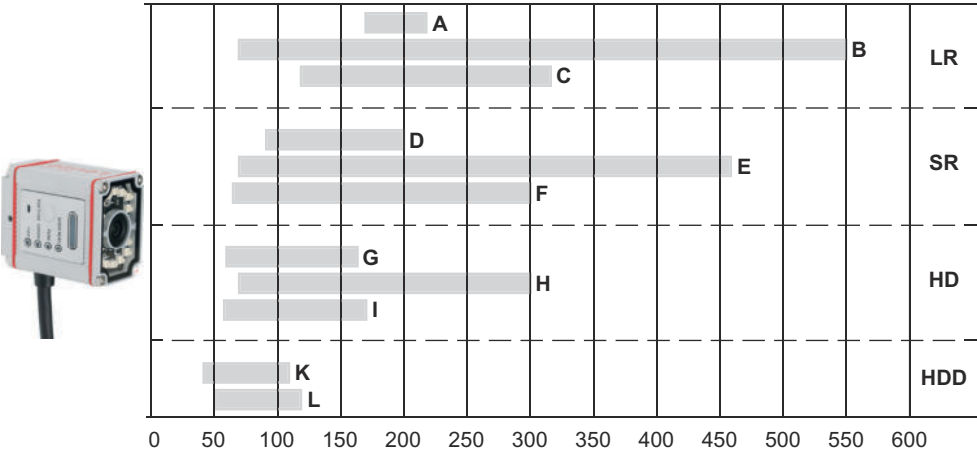

- A

Long Range, 0.254 mm (10 mil) / 2D-Codes
- B

Long Range, 0.33 mm (13 mil) / 1D-Codes
- C

Long Range, 0.127 mm (5 mil) / 1D-Codes
- D

Standard Range, 0.18mm (7 mil) / 2D-Code
- E

Standard Range, 0.33mm (13 mil) / 1D-Codes
- F

Standard Range, 0.127mm (5 mil) / 1D-Codes
- G

High density, 0.18 mm (7 mil) / 2D-Codes
- H


High density, 0.33 mm (13 mil) / 1D-Codes
- I

High density, 0.08 mm (3 mil) / 1D-Codes
- K

Hyper high density, 0.18mm (7 mil) / 2D-Codes
- L

Hyper high density, 0.08mm (3 mil) / 1D-Codes

Diagrams

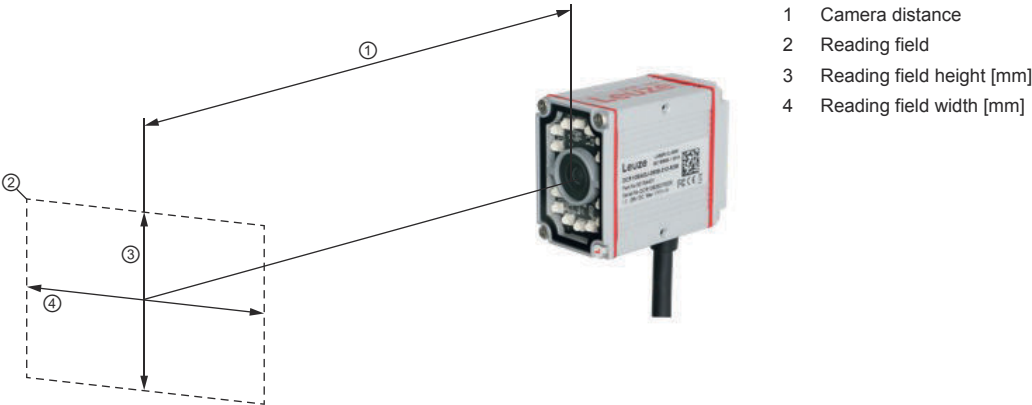

Field of view (typical)

Field of view (typical)		
1 Distance (mm)	3 Reading field height (mm)	4 Reading field width (mm)
100	52	61
200	103	122
300	155	183
400	206	244
500	257	306

Operation and display

LED	Display	Meaning
1 PWR	Off	No supply voltage
	Amber, continuous light	Device ON
2 ERROR	Red, continuous light	Device error
	Red, 1x flashing	Reading not successful
3 TUNE	Blue, flashing	Device in tuning mode
4 GOOD READ	Green, flashing	Reading successful

Part number code

Part designation: DCR XXXX YYY-ZZZZ-ABC-DEF-GGGG

DCR	Operating principle DCR: Dual Code Reader
XXXX	Series/interface (integrated fieldbus technology) 108i : Ethernet TCP/IP, RS 232, Modbus TCP
YYY	Focus ADJ: adjustable (manually)
ZZZZ	Optics model 06: focal length 6 mm 08: aperture f/8.0

Part number code

A	Connection 3: cable with single industrial plug 4: special cable (with dual industrial plug)
B	Cable length 1: 0.3 m
C	Beam exit 2: front side
D	Illumination R: red
E	Resolution range 3: 1024x768 - 1280x1024 pixels
F	Image sensor type M: monochrome
GGGG	Special equipment F001: NPN switching output

Notes

**Observe intended use!**



- ⚡ This product is not a safety sensor and is not intended as personnel protection.
- ⚡ The product may only be put into operation by competent persons.
- ⚡ Only use the product in accordance with its intended use.