

## **Technical data sheet Light curtain receiver** Part no.: 50119097 CML730i-R10-1920.R/CN-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 www.leuze.com
 www.leuze.com

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-03

We reserve the right to make technical changes

#### **Technical data**

# Leuze

Series	730	
Operating principle	Throughbeam principle	
Device type	Receiver	
Contains	Accessories for the use of the BT-2R1	
Application	Detection of transparent objects	
	Object measurement	
Special version		
Special version	Crossed-beam scanning	
	Diagonal-beam scanning	
	Parallel-beam scanning	
Optical data		
Operating range	0.3 9.5 m	
Operating range	Guaranteed operating range	
Operating range, transparent media	0.3 3.5 m	
Operating range limit	0.2 12 m	
Operating range limit	Typical operating range	
Measurement field length	1,920 mm	
Number of beams	192 Piece(s)	
Beam spacing	10 mm	
Measurement data		
Minimum object diameter	20 mm	
Electrical data		
Protective circuit	Polarity reversal protection	
	Short circuit protected	
	Short circuit protected Transient protection	
Porformanco data		
Performance data	Transient protection	
Supply voltage U <sub>B</sub>	Transient protection 18 30 V, DC	
	Transient protection	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current	Transient protection 18 30 V, DC 0 15 %, From U <sub>B</sub> 0 435 mA, The specified values refer to the entire package consisting of trans	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable	Transient protection 18 30 V, DC 0 15 %, From U <sub>B</sub> 0 435 mA, The specified values refer to the entire package consisting of trans mitter and receiver.	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max.	Transient protection 18 30 V, DC 0 15 %, From U <sub>B</sub> 0 435 mA, The specified values refer to the entire package consisting of trans mitter and receiver. 100 mA	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance	<ul> <li>Transient protection</li> <li>18 30 V, DC</li> <li>0 15 %, From U<sub>B</sub></li> <li>0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>100 mA</li> <li>6,000 Ω</li> </ul>	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectable	Transient protection         18 30 V, DC         0 15 %, From U <sub>B</sub> 0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver.         100 mA         6,000 Ω         ble 2 Piece(s)	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectal Type	<ul> <li>Transient protection</li> <li>18 30 V, DC</li> <li>0 15 %, From U<sub>B</sub></li> <li>0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver.</li> <li>100 mA</li> <li>6,000 Ω</li> </ul>	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectabl Type Voltage type, outputs	Transient protection         18 30 V, DC         0 15 %, From U <sub>B</sub> 0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver.         100 mA         6,000 Ω         ble       2 Piece(s)         Inputs/outputs selectable         DC	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectabl Type Voltage type, outputs Switching voltage, outputs	Transient protection         18 30 V, DC         0 15 %, From U <sub>B</sub> 0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver.         100 mA         6,000 Ω         ble       2 Piece(s)         Inputs/outputs selectable	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectab Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs	Transient protection         18 30 V, DC         0 15 %, From $U_B$ 0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver.         100 mA         6,000 $\Omega$ ble       2 Piece(s)         Inputs/outputs selectable         DC         Typ. $U_B / 0 V$	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectabl Type Voltage type, outputs Switching voltage, outputs	Transient protection         18 30 V, DC         0 15 %, From $U_B$ 0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver.         100 mA         6,000 Ω         ble       2 Piece(s)         Inputs/outputs selectable         DC         Typ. $U_B / 0 V$ DC	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectat Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	Transient protection         18 30 V, DC         0 15 %, From U <sub>B</sub> 0 435 mA, The specified values refer         to the entire package consisting of transmitter and receiver.         100 mA         6,000 Ω         ble       2 Piece(s)         Inputs/outputs selectable         DC         Typ. U <sub>B</sub> / 0 V         DC         high: $\geq 6V$	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectal Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1	Transient protection         18 30 V, DC         0 15 %, From U <sub>B</sub> 0 435 mA, The specified values refer         to the entire package consisting of transmitter and receiver.         100 mA         6,000 Ω         ble       2 Piece(s)         Inputs/outputs selectable         DC         Typ. U <sub>B</sub> / 0 V         DC         high: ≥6V         Iow: ≤ 4 V	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectat Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Switching voltage, inputs	Transient protection         18 30 V, DC         0 15 %, From U <sub>B</sub> 0 435 mA, The specified values refer         to the entire package consisting of transmitter and receiver.         100 mA         6,000 Ω         ble       2 Piece(s)         Inputs/outputs selectable         DC         Typ. U <sub>B</sub> / 0 V         DC         high: $\geq 6V$	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectal Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Time behavior	Transient protection         18 30 V, DC         0 15 %, From $U_B$ 0 435 mA, The specified values refer to the entire package consisting of transmitter and receiver.         100 mA         6,000 $\Omega$ ble       2 Piece(s)         Inputs/outputs selectable         DC         Typ. $U_B / 0 V$ DC         high: $\geq 6V$ low: $\leq 4 V$ 1 ms	
Supply voltage U <sub>B</sub> Residual ripple Open-circuit current Inputs/outputs selectable Output current, max. Input resistance Number of inputs/outputs selectal Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1	Transient protection         18 30 V, DC         0 15 %, From U <sub>B</sub> 0 435 mA, The specified values refer         to the entire package consisting of transmitter and receiver.         100 mA         6,000 Ω         ble       2 Piece(s)         Inputs/outputs selectable         DC         Typ. U <sub>B</sub> / 0 V         DC         high: ≥6V         Iow: ≤ 4 V	

CANopen Function	Process
Service interface	
Туре	IO-Link
IO-Link	
Function	Configuration via software
	Service
Connection	
Number of connections	2 Piece(s)
Plug outlet	Rear side
5	
Connection 1	
Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
Turne of a surrentian	Voltage supply
Type of connection	Connector
Thread size	M12
Type Material	Male Metal
No. of pins	8 -pin A-coded
Encoding	A-coded
Connection 2	
Function	BUS IN
	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded
Mechanical data	
Design	Cubic
Dimension (W x H x L)	29 mm x 35.4 mm x 1,943 mm
Housing material	Metal
Metal housing	Aluminum
_ens cover material	Plastic
Net weight	2,100 g
	0"
Housing color	Silver
· · · · ·	Silver Groove mounting
· · · · · ·	
Type of fastening	Groove mounting
Type of fastening Operation and display	Groove mounting Via optional mounting device
Type of fastening Operation and display	Groove mounting Via optional mounting device LED
Type of fastening Operation and display Type of display	Groove mounting Via optional mounting device LED OLED display
Type of fastening Operation and display Type of display Number of LEDs	Groove mounting Via optional mounting device LED OLED display 2 Piece(s)
Type of fastening Operation and display Type of display Number of LEDs	Groove mounting Via optional mounting device LED OLED display 2 Piece(s) Software
Housing color Type of fastening Operation and display Type of display Number of LEDs Type of configuration	Groove mounting Via optional mounting device
Type of fastening Operation and display Type of display Number of LEDs	Groove mounting Via optional mounting device LED OLED display 2 Piece(s) Software
Type of fastening Operation and display Type of display Number of LEDs Type of configuration Operational controls	Groove mounting Via optional mounting device
Type of fastening Operation and display Type of display Number of LEDs Type of configuration	Groove mounting Via optional mounting device

Туре

CANopen

### **Technical data**

#### Certifications

Degree of protection	IP 65
Protection class	III
Approvals	c UL US
Standards applied	IEC 60947-5-2


#### Classification

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ECLASS 15.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549
ETIM 10.0	EC002549



#### **Dimensioned drawings**

All dimensions in millimeters

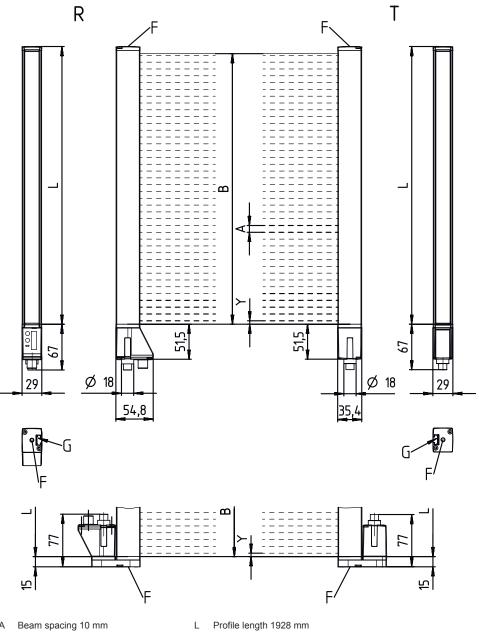

Beam spacing 10 mm А

Fastening groove

- В Measurement field length 1920 mm
- F M6 thread

G

R Receiver

Т


5 mm Υ

Transmitter

# Leuze

#### **Dimensioned drawings**



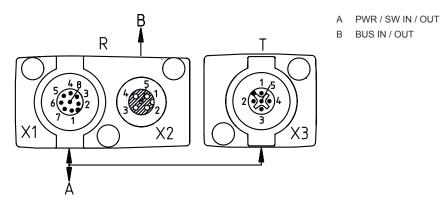

### **Electrical connection**

**Connection 1** 

Function	Configuration interface
	Connection to transmitter
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	8 -pin
Encoding	A-coded

#### Pin Pin assignment

1	V+		
2	I/O 1		
3	GND		
4	IO-Link		
5	I/O 2		
6	RS 485 Tx+		
7	RS 485 Tx+		
8	FE/SHIELD		



Function	BUS IN
	BUS OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

### **Electrical connection**

Pin	Pin assignment	2
1	FE/SHIELD	1
2	n.c.	
3	CAN GND	
4	CAN H	
5	CAN L	

#### **Operation and display**

LED	Display	Meaning
1	Green, continuous light	Operational readiness
	Green, flashing	Teach / error
2	Yellow, continuous light	Light path free, with function reserve
	Yellow, flashing	No function reserve
	Off	Object detected

#### Suitable transmitters

 Part no.	Designation	Article	Description
50117911	CML730i-T10- 1920.R-M12	Light curtain transmitter	Operating range: 0.3 9.5 m Connection: Connector, M12, Rear side, 5 -pin

#### Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series           720i: 720i series           730i: 730i series
Y	Device type T: transmitter R: receiver
22	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: Axial connector outlet R: Rear connector outlet
ccc	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus



#### Part number code



DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
	Note
A	∜ A list with all available device types can be found on the Leuze website at www.leuze.com.

#### Notes

Observe intended use!
<ul> <li>This product is not a safety sensor and is not intended as personnel protection.</li> <li>The product may only be put into operation by competent persons.</li> <li>Only use the product in accordance with its intended use.</li> </ul>



#### For UL applications:

 For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
 These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

#### Accessories

#### Connection technology - Connection cables

 Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC

#### Connection technology - Interconnection cables

 Part no.	Designation	Article	Description
50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

#### Accessories

# Leuze

### Connection technology - Y distribution cables

	Part no.	Designation	Article	Description
	50118183	K-Y1 M12A-5m- M12A-S-PUR	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR
	50118185	K-YCN M12A-M12A- S-PUR	Interconnection cable	Suitable for interface: CANopen Connection 1: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length fork 1: 250 mm Cable length fork 2: 350 mm Sheathing material: PUR

### Connection technology - Terminating resistors

 Part no.	Designation	Article	Description
50040099	TS 01-5-SA	Terminator plug	Suitable for: DeviceNet, CANopen Function: Bus termination Connection 1: Connector, M12, Axial, Male, A-coded, 5 -pin

#### Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

#### Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
ęę.	429029	BT-2RG	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

#### Services

 Part no.	Designation	Article	Description
S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.

# Leuze

#### Accessories

 Part no.	Designation	Article	Description
S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
6	No A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.