## Leuze

## **Technical data sheet Light curtain receiver** Part no.: 50120102 CML720i-R20-1430.R/L-M12



 Leuze electronic GmbH + Co. KG
 info@leuze.com • www.leuze.com
 changes

 The Sensor People
 In der Braike 1, D-73277 Owen/Germany
 Phone: +49 7021 573-0 • Fax: +49 7021 573-199
 eng • 2025-04-04

#### 1/8

### **Technical data**

# Leuze

Series	720				
Operating principle	Throughbeam principle Receiver				
Device type					
Contains	Accessories for the use of the BT-2R1				
Application	Object measurement				
Special version					
Special version	Crossed-beam scanning				
	Diagonal-beam scanning				
	Parallel-beam scanning				
Optical data					
Operating range	0.3 7 m				
Operating range	Guaranteed operating range				
Operating range limit	0.2 9 m				
Operating range limit	Typical operating range				
Measurement field length	1,430 mm				
Number of beams	72 Piece(s)				
Beam spacing	20 mm				
leasurement data					
Minimum object diameter	30 mm				
Electrical data					
Protective circuit	Polarity reversal protection				
	Short circuit protected				
	Transient protection				
Performance data					
	18 30 V, DC				
	0 15 %, From U <sub>B</sub>				
	<ol> <li>270 mA, The specified values refer to the entire package consisting of trans mitter and receiver.</li> </ol>				
Inputs/outputs selectable					
	100 mA				
Output current, max.	100 mA 6,000 Ω				
Output current, max.	6,000 Ω				
Output current, max. Input resistance Number of inputs/outputs selectable	6,000 Ω				
Output current, max. Input resistance Number of inputs/outputs selectable Type	6,000 Ω 4 Piece(s)				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs	6,000 Ω 4 Piece(s) Inputs/outputs selectable				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs	6,000 Ω 4 Piece(s) Inputs/outputs selectable DC				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs	6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	6,000 Ω 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs	6,000 $\Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: $\geq$ 6V				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1	6,000 $\Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: $\geq$ 6V				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay	6,000 $\Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: $\geq$ 6V Iow: $\leq$ 4 V				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Time behavior	6,000 $\Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: $\geq$ 6V Iow: $\leq$ 4 V 0 1 ms				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Time behavior Readiness delay	6,000 $\Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: $\geq$ 6V Iow: $\leq$ 4 V 0 1 ms				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Time behavior Readiness delay Cycle time	6,000 $\Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: $\geq$ 6V Iow: $\leq$ 4 V 0 1 ms 400 ms 2.56 ms				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Time behavior Readiness delay Cycle time	6,000 $\Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: $\geq$ 6V Iow: $\leq$ 4 V 0 1 ms				
Output current, max. Input resistance Number of inputs/outputs selectable Type Voltage type, outputs Switching voltage, outputs Voltage type, inputs Switching voltage, inputs Input/output 1 Activation/disable delay Time behavior Readiness delay Cycle time	6,000 $\Omega$ 4 Piece(s) Inputs/outputs selectable DC Typ. U <sub>B</sub> / 0 V DC high: $\geq$ 6V Iow: $\leq$ 4 V 0 1 ms 400 ms 2.56 ms				

IO-Link	20140				
COM mode	COM2 COM2 = 2.3 ms				
Min. cycle time	V1.0.1				
Specification	V1.0.1				
	VI.I				
Service interface					
Туре	IO-Link				
IO-Link					
Function	Configuration via software				
	Service				
Connection					
Number of connections	2 Piece(s)				
Plug outlet	Rear side				
Connection 1					
Function	Configuration interface				
	Signal IN				
	Signal OUT				
	Voltage supply				
Type of connection	Connector				
Thread size	M12				
Туре	Male				
Material	Metal				
No. of pins	8 -pin				
Encoding	A-coded				
Connection 2					
Function	Connection to transmitter				
Type of connection	Connector				
Thread size	M12				
Туре	Female				
Material	Metal				
No. of pins	5 -pin				
Encoding	A-coded				
Mechanical data					
Design	Cubic				
Dimension (W x H x L)	29 mm x 35.4 mm x 1,463 mm				
Housing material	Metal				
Metal housing	Aluminum				
Lens cover material	Plastic				
Net weight	1,650 g				
Housing color	Silver				
Type of fastening	Groove mounting				
	Via optional mounting device				
Operation and display					
Type of display	LED				
.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	OLED display				
Number of LEDs	2 Piece(s)				
Type of configuration	Software				
	Teach-in				
Operational controls	Membrane keyboard				
Environmental data					
Ambient temperature, operation	-30 60 °C				
Ambient temperature, storage	-40 70 °C				
. ,					

### **Technical data**

#### Certifications


#### Classification

Customs tariff number	90314990
ECLASS 5.1.4	27270910
ECLASS 8.0	27270910
ECLASS 9.0	27270910
ECLASS 10.0	27270910
ECLASS 11.0	27270910
ECLASS 12.0	27270910
ECLASS 13.0	27270910
ECLASS 14.0	27270910
ECLASS 15.0	27270910
ETIM 5.0	EC002549
ETIM 6.0	EC002549
ETIM 7.0	EC002549
ETIM 8.0	EC002549
ETIM 9.0	EC002549
ETIM 10.0	EC002549



### **Dimensioned drawings**

All dimensions in millimeters

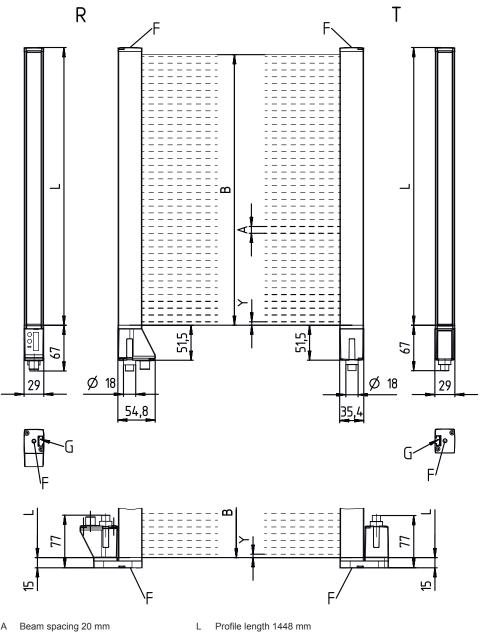

- Beam spacing 20 mm А
- В Measurement field length 1430 mm
- F M6 thread G Fastening groove
- R Υ

Т

Transmitter


Receiver

5 mm



### **Dimensioned drawings**



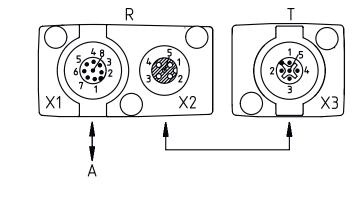

A PWR / SW IN / OUT


### **Electrical connection**

**Connection 1** 

Function	Configuration interface			
	Signal IN			
	Signal OUT			
	Voltage supply			
Type of connection	Connector			
Thread size	M12			
Туре	Male			
Material	Metal			
No. of pins	8 -pin			
Encoding	A-coded			

#### Pin Pin assignment

1	V+		
2	IO1		
3	GND		
4	IO-Link		
5	102		
6	IO3		
7	IO4		
8	GND		



#### **Connection 2**

Function	Connection to transmitter
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

#### Pin Pin assignment

1	FE/SHIELD
2	V+
3	GND
4	RS 485 Tx+
5	RS 485 Tx-



### **Operation and display**

LED	Display	Meaning		
1	Green, continuous light	Operational readiness		
	Green, flashing	Teach / error		
2	Yellow, continuous light	Light path free, with function reserve		
	Yellow, flashing	No function reserve		
	Off	Object detected		

#### Suitable transmitters

 Part no.	Designation	Article	Description
50119513	CML720i-T20- 1430.R-M12	Light curtain transmitter	Operating range: 0.3 7 m Connection: Connector, M12, Rear side, 5 -pin

#### Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

CML	Operating principle Measuring light curtain
7XXi	Series           720i: 720i series           730i: 730i series
Y	Device type T: transmitter R: receiver
ZZ	Beam spacing 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm
AAAA	Measurement field length [mm], dependent on beam spacing
В	Equipment A: Axial connector outlet R: Rear connector outlet
CCC	Interface L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus
DDD	Special equipment -PS: Power Setting
EEE	Electrical connection M12: M12 connector
FFF	-EX: Explosion protection
Note	
A list wi	th all available device types can be found on the Leuze website at www.leuze.com.

Leuze


#### Notes

#### Observe intended use!

✤ This product is not a safety sensor and is not intended as personnel protection.

b The product may only be put into operation by competent persons.

 $\ensuremath{^{\ensuremath{\Downarrow}}}$  Only use the product in accordance with its intended use.



ł	For UL a	application	is, use	is only per	mitted in Class 2	circuits in	accordance with	the NEC (N	lational E	lectric Code).	

These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

#### Accessories

#### Connection technology - Connection unit

	Part no.	Designation	Article	Description
C. LEATING	50144900	MD 798i-11-82/L5- 2222	IO-Link master	Type: IO-Link master Current consumption, max.: 11,000 mA Switching outputs for each sensor connection: 1 Piece(s) Switching output: Transistor, PNP Interface: IO-Link, Automatic protocol detection, EtherNet IP, Modbus TCP, PROFINET Connections: 12 Piece(s) Sensor connections: 8 Piece(s) Connections for voltage supply: 2 Piece(s) Interface connections: 2 Piece(s) Degree of protection: IP 67, IP 65, IP 69K

#### Connection technology - Connection cables

	Part no.	Designation	Article	Description
	50135128	KD S-M12-8A-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end
				Shielded: Yes Cable length: 5.000 mm Sheathing material: PUR

#### Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
	50129781	KDS DN-M12-5A- M12-5A-P3-050	Interconnection cable	Suitable for interface: DeviceNet, CANopen Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Leuze

## Leuze

#### Accessories

## Mounting technology - Mounting brackets

 Part no.	Designation	Article	Description
 50142900	BT 700M.5-2SET	Mounting device set	Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel

#### Mounting technology - Swivel mounts

	Part no.	Designation	Article	Description
ęę.	429029	BT-2RG	Mounting bracket set	Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic

### Configuration devices

 Part no.	Designation	Article	Description
50121098	SET MD12-US2-IL1.1 + Zub.	Diagnostics set	Interface: USB Connections: 2 Piece(s) Degree of protection: IP 20

#### Services

	Part no.	Designation	Article	Description
y; U	S981001	CS10-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.
	S981005	CS10-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses.

	Note
6	S A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.