

# **Technical data sheet** Bar code positioning system

Part no.: 50104787

BPS 8 SM 102-03



### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes
- Accessories











### **Technical data**



#### Basic data

Series	BPS 8
Data telegram	Binary protocol 3
Order guide	Bar code tape must be ordered sepa-

### **Characteristic parameters**

MTTF	67.5 years

### **Optical data**

80 140 mm
Laser, Red
655 nm
2, IEC/EN 60825-1:2014
Continuous
Front

#### Measurement data

Measurement range	0 10,000,000 mm
Resolution	0.001 100 mm
Measurement value output	3.3 ms
Max. traverse rate	4 m/s

#### **Electrical data**

Books of a store to	Object of a first order of a d
Protective circuit	Short circuit protected

Pe	erf	O	rm	an	ce	data
----	-----	---	----	----	----	------

Supply voltage U <sub>B</sub>	4.75 5.5 V, DC
Current consumption, max.	250 mA

### Inputs/outputs selectable

Output current, max.	100 mA
Number of inputs/outputs selectable	1 Piece(s)

#### Interface

RS 232 Function Process Transmission speed 1,200 187,500 Bd  Data format Fixed Start bit 1  Data bit 8 Stop bit 1  Parity Adjustable Transmission protocol Adjustable  Data encoding Binary	Туре	RS 232
Transmission speed 1,200 187,500 Bd  Data format Fixed  Start bit 1  Data bit 8  Stop bit 1  Parity Adjustable  Transmission protocol Adjustable	RS 232	
Data formatFixedStart bit1Data bit8Stop bit1ParityAdjustableTransmission protocolAdjustable	Function	Process
Start bit 1  Data bit 8  Stop bit 1  Parity Adjustable  Transmission protocol Adjustable	Transmission speed	1,200 187,500 Bd
Data bit 8 Stop bit 1 Parity Adjustable Transmission protocol Adjustable	Data format	Fixed
Stop bit 1 Parity Adjustable Transmission protocol Adjustable	Start bit	1
Parity Adjustable Transmission protocol Adjustable	Data bit	8
Transmission protocol Adjustable	Stop bit	1
·	Parity	Adjustable
Data encoding Binary	Transmission protocol	Adjustable
· · · · · · · · · · · · · · · · · · ·	Data encoding	Binary

### Service interface

**Number of connections** 

Туре	RS 232	
RS 232		
Function	Service	
Connection		

1 Piece(s)

Connection to device
Connector
M12
Male
Metal
5 -pin
A-coded

#### **Mechanical data**

Design	Cubic
Dimension (W x H x L)	15 mm x 48 mm x 40.3 mm
Housing material	Metal
Metal housing	Diecast zinc
Lens cover material	Glass
Net weight	70 g
Housing color	Red
	Silver
Type of fastening	Dovetail grooves
	Mounting thread
	Through-hole mounting
	Via optional mounting device

### Operation and display

Type of display	LED
Number of LEDs	2 Piece(s)

### **Environmental data**

Ambient temperature, operation	0 40 °C
Ambient temperature, storage	-20 60 °C
Relative humidity (non-condensing)	0 90 %

### Certifications

Degree of protection	IP 67, EN 60529 with various connectors or screwed-on caps
Protection class	III
Approvals	c UL US
Test procedure for EMC in accordance	EN 55022
with standard	EN 55024
	EN 61000-4-2, -3, -4, -6
	EN 61000-6-2, -3
Test procedure for shock in	EN 60068-2-27
accordance with standard	IEC 60068-2-27, test Ea
Test procedure for continuous shock in accordance with standard	IEC 60068-2-29, test Eb
Test procedure for vibration in accordance with standard	IEC 60068-2-6, test Fc

## **Technical data**





Customs tariff number	84719000
ECLASS 5.1.4	27280190
ECLASS 8.0	27280190
ECLASS 9.0	27280190
ECLASS 10.0	27280190
ECLASS 11.0	27280190
ECLASS 12.0	27280106
ECLASS 13.0	27280106
ECLASS 14.0	27280106
ECLASS 15.0	27280106
ETIM 5.0	EC001825
ETIM 6.0	EC001825
ETIM 7.0	EC001825
ETIM 8.0	EC001825
ETIM 9.0	EC001825
ETIM 10.0	EC001825

## **Dimensioned drawings**



All dimensions in millimeters

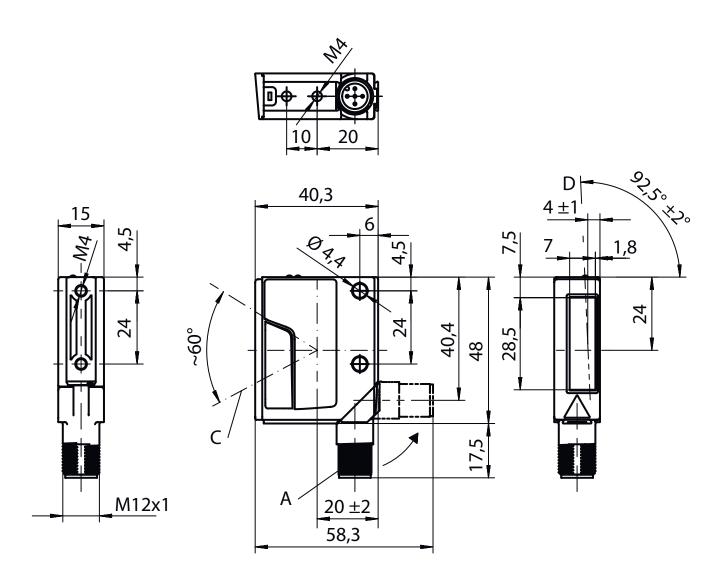

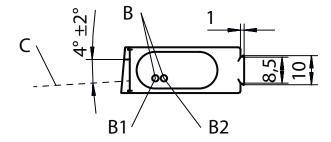

- Turning connector, turnable by  $90^{\circ}$
- В Indicator diodes (B1: status LED, B2: decode LED)
- С Scanning beam, divergence max. 5 mm at 150 mm reading distance
- Optical axis


### **Electrical connection**



### **Connection 1**


Function	Connection to device
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin	Pin assignment
1	V+
2	RS 232 TxD
3	GND
4	RS 232 RxD
5	SW IN/OUT



## **Diagrams**

### Reading field curve

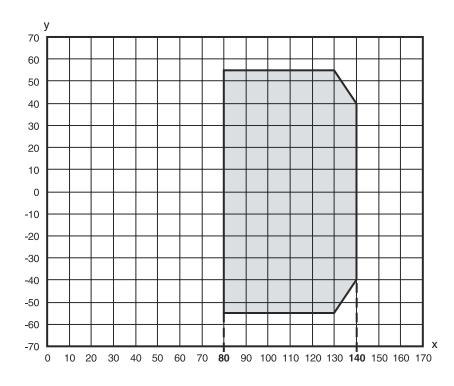

- Reading distance [mm]
- Reading field width [mm]

Gray Working range

## **Operation and display**

LED	Display	Meaning
1	Off	No supply voltage
	Green, flashing	Device ok, initialization phase
	Green, continuous light	Operational readiness
	Red, flashing	Device OK, warning set
	Red, continuous light	Device error
	Orange, flashing	Service operation active
2	Off	Positioning deactivated
	Green, continuous light	Positioning running (position value valid)

Orange, continuous light

### **Operation and display**



Positioning running (marker label detected)

LED	Display	Meaning
2	Red, continuous light	Positioning running (position value invalid)

### Part number code

Part designation: BPS 8 XX YYY - ZZ

xx	Scanning principle / optics S: line scanner (single line) M: Medium Density (medium distance)
YYY	Beam exit 100: lateral 102: front
ZZ	Presetting 01 / 05: Binary protocol 1 02: Binary protocol 2 03: Binary protocol 3 04: Binary protocol 4 10: Binary protocol 6

#### Note



♦ A list with all available device types can be found on the Leuze website at www.leuze.com.

### **Notes**



#### Observe intended use!



- This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

### **ATTENTION! LASER RADIATION - CLASS 2 LASER PRODUCT**



#### Do not stare into beam!

The device satisfies the requirements of IEC/EN 60825-1:2014 safety regulations for a product of laser class 2 as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 56 from May 08, 2019.

- 🔖 Never look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- ♥ Do not point the laser beam of the device at persons!
- 🔖 Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
- When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
- 🔖 CAUTION! The use of operating and adjusting devices other than those specified here or the carrying out of differing procedures may lead to dangerous exposure to radiation!
- Observe the applicable statutory and local laser protection regulations.
- \$ The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

We reserve the right to make technical changes

### Notes



#### NOTE



#### Affix laser information and warning signs!

Laser information and warning signs are affixed to the device. In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages.

- "Affix the laser information sheet to the device in the language appropriate for the place of use. When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" note.
- 🌣 Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
- 🌣 Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical

### **Accessories**

## Connection technology - Connection unit

	Part no.	Designation	Article	Description
	50112891	MA 248i Profinet Gateway	Modular connection unit	Supply voltage: 18 30 V Current consumption, max.: 300 mA Interface: PROFINET, RS 232 Connections: 6 Piece(s) Degree of protection: IP 65
<u>ee</u>	50104790	MA 8-01	Modular connection unit	Supply voltage: 10 30 V Current consumption, max.: 50 mA Interface: RS 485 Connections: 3 Piece(s) Degree of protection: IP 67

## Connection technology - Connection cables

Part no.	Designation	Article	Description
50040757	KB 008-3000 A	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: Yes Cable length: 3.000 mm Sheathing material: PUR

## Connection technology - Interconnection cables

Part no.	Designation	Article	Description
50113467	KB JST-M12A-5P- 3000	Interconnection cable	Suitable for interface: RS 232 Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: JST ZHR connector, 12 -pin Shielded: Yes Cable length: 3,000 mm Sheathing material: PUR

The Sensor People In der Braike 1, D-73277 Owen/Germany Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2025-04-03

Leuze electronic GmbH + Co. KG

### **Accessories**



Part no.	Designation	Article	Description
50133890	KDS S-M12-5A-M12- 5A-P1-020	Interconnection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length: 2,000 mm Sheathing material: PUR

## Mounting technology - Mounting brackets

Part no.	Designation	Article	Description
50104791	BT 8-01	Mounting device	Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Material: Metal

## Mounting technology - Rod mounts

Part no.	Designation	Article	Description
50127177	BTU 008M-D10	Mounting system	Design of mounting device: Mounting system Fastening, at system: Sheet-metal mounting, For 10 mm rod Mounting bracket, at device: Screw type Type of mounting device: Turning, 360°, Adjustable, Clampable Material: Metal

## Bar code tape

 Part no.	Designation	Article	Description
50144173	BCB G30 H25 L010	Bar code tape	Dimensions: 25 mm x 10,000 mm Grid dimension: 30 mm
50104792	BCB G30 H47 L010	Bar code tape	Dimensions: 47 mm x 10,000 mm Grid dimension: 30 mm

Ν		٠.
- 121	(O)	II ÷



🖖 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.