

技术数据表

旋转编码器系列信息

配件编号: 90000380

EI30-P 058 SF

内容

- 技术参数
- 产品型号描述



图片可能不同

编码器_系列	EI 058 SF
编码器_基本原理	增量
编码器_工作原理	光学插值
编码器_法兰直径	Ø 58 mm
编码器_法兰型号	螺栓
编码器_实心轴/空心轴H	空心轴
编码器_轴直径	Ø 10 mm
编码器_供电电压	10 ... 30 V DC
	4.75 ... 5.5 V DC
	5 ... 30V DC
编码器_输出电路	1 Vss Sin/Cos
	HTL
	HTL , 逆转
	TTL
	TTL , RS422 紧凑型 , 逆转
编码器_脉冲数	10000 I/U
	10240 I/U
	12000 I/U
	12500 I/U
	1440 I/U
	15000 I/U
	16384 I/U
	20000 I/U
	20480 I/U
	25000 I/U
	2880 I/U
	3000 I/U
	3600 I/U
	4000 I/U
	5760 I/U
	6000 I/U
	7200 I/U
	7500 I/U
	8000 I/U
	9182 I/U

技术参数

Encoder EI30 P 058 SF

Resolution

Pulses per revolution PPR	up to 25000 PPR
---------------------------	-----------------

Mechanical Data

Flange	clamping flange
Flange material	stainless steel, V4A
Housing material	stainless steel, V4A
Flange diameter	Ø 58 mm [Ø 2.283"]

Shaft(s)

Shaft material	stainless steel, V4A
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature

Shaft	Ø 10 mm [Ø 0.394"]
--------------	--------------------

Shaft length	L: 18 mm [0.709"]
--------------	-------------------

Max. Permissible shaft loading radial	100 N [10.197 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Bearings

Bearings type	2 precision ball bearings
Nominal service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 1 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	3600 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominal service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 3600 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL ≤ 5000 ppr: max. 200 kHz HTL ≤ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C4, C6, D4, D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany

General Data


Weight	approx. 600 g [21.164 oz]
Connections	cable outlet (TPE)
Protection rating (EN 60529)	IP67+IP69K all around. Resistance to salt mist (IEC 60068-2-11) after 672 hours.
Operating temperature	-20 °C up to +80 °C [-4 °F up to +176 °F] 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	-20 °C up to +80 °C [-4 °F up to +176 °F]

技术参数

Encoder EI30 P 058 SF

Cable connection A-N, A-C, axial, with 2 m cable

Minimum distance of 1.5
to sealing lip

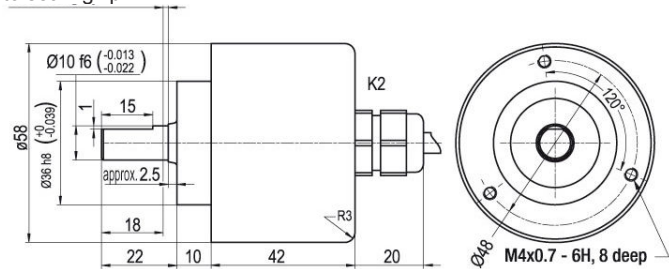

All dimensions in mm

Description		N inv. poss.
A-N	axial, shield not connected	•
A-C	axial, shield connected to encoder housing	•


Assignments			
Circuit	A-N, A-C	A-N, A-C	A-C
	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	–
–	–	–	–
A inv.	–	RD	YE
B inv.	–	BU	PK
N inv.	–	VT	–
Shield	flex	flex	flex

技术参数

Encoder EI30 P 058 SF

Cable connection R-N, R-C, radial, with 2 m cable

Minimum distance of 1.5
to sealing lip

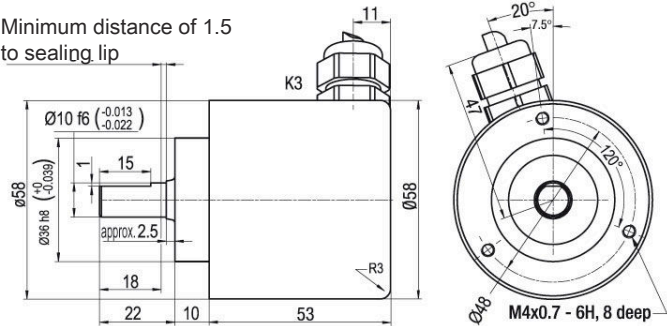

All dimensions in mm

Description

N inv. poss.

R-N	radial, shield not connected	•
R-C	radial, shield connected to encoder housing	•

Assignments

	R-N, R-C	R-N, R-C	R-C
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	-
-	-	-	-
A inv.	-	RD	YE
B inv.	-	BU	PK
N inv.	-	VT	-
Shield	flex	flex	flex

技术参数

Encoder EI30 P 058 SF

Options

Cable length	Order key
The encoder EI30 P 058 SF can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency. Please extend the standard order code with a three figure number, specifying the cable length in decimetres. Example: 5 m cable = 050	XXX = Decimeter

技术参数

Encoder EI30 P 058 SF

Example Order No.	Type
EI30 P 058 SF	EI30 P 058 SF

Pulses per revolution PPR:

5000	2, 5, 10, 15, 20, 25, 30, 36, 40, 48, 50, 60, 64, 72, 90, 100, 120, 125, 128, 150, 160, 180, 200, 216, 240, 250, 254, 256, 300, 314, 320, 360, 400, 500, 512, 571, 600, 720, 750, 768, 800, 900, 1000, 1024, 1200, 1250, 1270, 1440, 1500, 1800, 2000, 2048, 2400, 2500, 2880, 3000, 3600, 4000, 4096, 4685, 5000, 5760, 6000, 7200, 7500, 8000, 8192, 10000, 10240, 12000, 12500, 15000, 16384, 20000, 20480, 25000 1 Vpp Sin/Cos only 1024, 2048 Other PPRs on request
------	--

Channels:

N	B, N (SIN: B)
---	---------------

Output circuit

Resolution PPR	Power supply VDC	Output circuit	-	Order key
up to 2500	5 - 30	HTL (TTL at 5 VDC)	–	C7
	5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	–	D7
up to 5000	4.75 - 5.5	TTL	–	C5
	4.75 - 5.5	TTL, RS422 comp., inverted	–	D5
	10 - 30	HTL	–	C6
	10 - 30	HTL inverted	–	D6
	10 - 30	TTL, RS422 comp., inverted	–	C1
	10 - 30	TTL, RS422 comp., inverted	–	D3
(higher frequency) 1200 up to 25000	4.75 - 5.5	TTL	–	C3
	4.75 - 5.5	TTL, RS422 comp., inverted	–	D3
	10 - 30	HTL	–	C4
	10 - 30	HTL inverted	–	D4
1024, 2048	4.75 - 5.5	TTL, RS422 comp., inverted	–	C2
	4.75 - 5.5	1 Vpp sin/cos	–	D8

Electrical connections

Description	N inv. poss.	Order key
Cable: length (2 m standard)		
axial, shield not connected	•	A-N
axial, shield connected to encoder housing	•	A-C
radial, shield not connected	•	R-N
radial, shield connected to encoder housing	•	R-C

Options

Description	Order key
Without option	Empty
Cable length	XXX = Decimeter

Example Order No.:	EI30P058SF	10	5000	N	C6	A-N	EI30P058SF	Your encoder
--------------------	------------	----	------	---	----	-----	------------	--------------

产品型号描述

产品名称：EABB CCCDDEE FFFFFFF GHHJKK LLMNOPPP RR

A	旋转编码器型号 I：增量 S：绝对，单圈 M：绝对，多圈
BB	系列 10：条目 30：基本型 50：扩展型 70：高级版
CCC	法兰直径 024: 24 mm 036: 36 mm 058: 58 mm 063: 63 mm 067: 67 mm 070: 70 mm 080: 80 mm 100：100 mm 115: 115 mm
DD	法兰型号 BB：带有盲孔钻孔的空心轴 CC：夹紧法兰（紧凑结构形式） CF：夹紧法兰（食品和饮料） CH：夹紧法兰（重负载规格） CL：夹紧法兰 HI：空心轴（绝缘） HO：空心轴 HT：空心轴（特殊扭矩支承） RC：圆形法兰（36/40 夹紧法兰，58 带 6-mm-轴） RE：圆形法兰（扩展钻孔） RN：圆形法兰 SC：定子联轴器 SF：螺栓法兰（53 夹紧法兰，58 食品和饮料） SI：伺服法兰（高级轴负载和 IP 地址） SQ：方形法兰 SR：螺栓法兰（36/40 夹紧法兰，58 耐腐蚀） SY：同步（增量），伺服(36)，同步(58)（绝对） TM：转速计（115 带 1-mm-轴，58 电机反馈） TS：转速计（10-mm-轴）
EE	轴-/钻孔直径 06: 6 mm 07: 7 mm 08: 8 mm 08: 8 mm 10: 10 mm 11: 11 mm 12: 12 mm 14: 14 mm 15: 15 mm 06-72：空心/盲孔钻孔 (6 ... 72 mm)
FFFFFF	信号/分辨率 Axxxxx: A Bxxxxx: AB Nxxxxx: ABN P16384：可编程 xx：单圈，1 ... 16 位 xx：多圈，0 ... 43 位（单圈时为 00）
G	电隔离（仅绝对） 0：无 1：带有
HH	供电电源（仅绝对） 0：10 ... 32 V DC/带电隔离 1: 4.75 ... 5.5 V DC 2: 18 ... 30 V DC
J	工作原理 M：磁性 O：光学 P：光学插值

产品型号描述

KK	接口 01: RS485 07 : SSI 二进制 08: SSI Gray 35: CANopen 38: EtherCAT 48: PROFINET 58: EtherNet/IP
LL	电气连接 M08 : 圆形插头 M8 M12 : 圆形插头 M12 M16 : 圆形插头 M16 M23 : 圆形插头 M23 M12BC : 总线罩插头
M	电缆出口 A : 轴向 R : 径向 T : 正切
NN	引脚数 xx : 引脚数
O	屏蔽接口 (2-m-电缆) (可选) C : 已连接 N : 未连接
PPP	电缆长度 xxx : 电缆长度 (单位为 dm)

注意



所有可用设备类型列表请查阅劳易测的网站 www.leuze.com。

