

KFX-ETC-320

Art.-Nr. 50117759

Lichtleiter, tastend

KFX-ETC-320

Part No. 50117759

fiber, reflective

Technische Daten

Lichtleiter Typ	koaxial
Betriebstemperatur	-55°C ... +70°C
Min. Biegeradius	R15
Außendurchmesser Lichtleiter	2x Ø1,25mm
Aktiver Durchmesser Faser	1x Ø0,5mm
	10x Ø0,25mm
Kleinstes erkennbares Teil	Ø0,05mm
Gesamtlänge	2019mm

Specifications

Fiber type	coaxial
Operating temperature	-55°C ... +70°C
Min. bending radius	R15
Fiber jacket diameter	2x Ø1.25mm
Active fiber diameter	1x Ø0.5mm
	10x Ø0.25mm
Smallest detectable object	Ø0.05mm
Total length	2019mm

Features




- 1) Einstellung am Lichtleiterverstärker: max. Ansprechzeit, max. Verstärkung, min. Schaltschwelle /
Adjustment on fiber optics amplifier: max. response time, max. gain, min. switching threshold

Typische Grenzreichweite für helle Objekte (weiß 90%)¹⁾ Typ. scanning range limit for light objects (white 90%)¹⁾

LV463I.XR	450mm
LV463.XR	225mm
LV463B, LV463.XV	155mm
LV463	90mm
LV462	60mm
LV461	30mm

Maßzeichnung/Dimensioned drawing

Ø0,5 fiber optic
core x1
Ø0,25 fiber optic
core X10

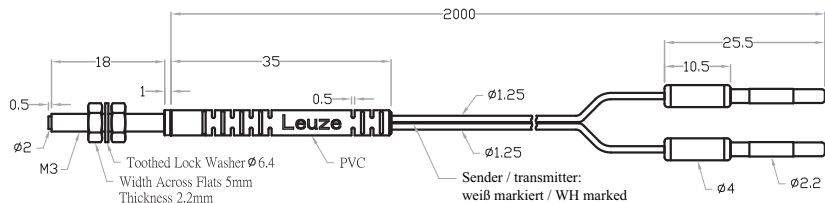

Zubehör (separat erhältlich)/Accessories (available separately)

- KL-M03; 50117780
- KL-M03-1; 50117783

