



HRTU 418
Ultrasonic sensors


**50 ... 300mm
150 ... 1000mm**

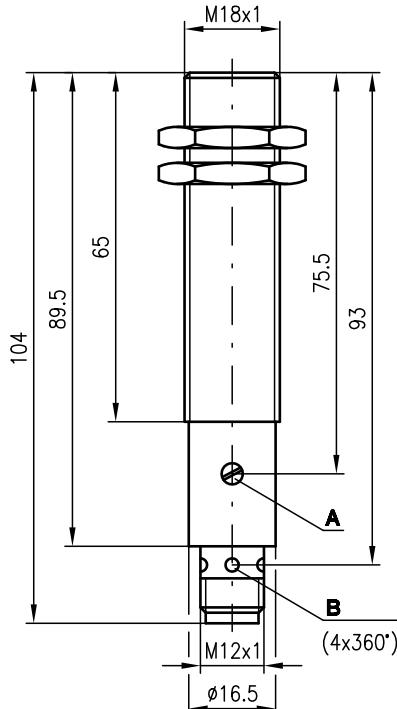

- Ideal for detection of levels of liquids, bulk materials, transparent media, ...
- Distance information largely independent of surface properties
- PC-configuration software for configuring sensor and switching output
- Up to 10 devices can be synchronised via the SYNC input
- Start and end of switching range adjustable separately via PC


Dimensioned drawing


- A** End of switching range (only for ... 418M/P ...)
B Indicator diodes Q1


Accessories:

(available separately)

- Mounting systems
- Cable with M12 connector (K-D ...)
- "USDS-Config" configuration software (free download from www.leuze.com)
- PGU 01 (programming unit)

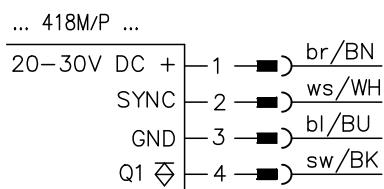Electrical connection


Specifications

Ultrasonic specifications

	HRTU...-5010-300...	HRTU...-3010-1000...
Operating range ¹⁾	50 ... 300 mm	150 ... 1000 mm
Ultrasonic frequency	400 kHz	200 kHz
Opening angle	6°	
Resolution	1 mm	
Absolute measurement accuracy	± 2.5 % of the measurement range end value	
Reproducibility	± 1 mm	± 2 mm
Switching hysteresis	10 mm	10 mm

Timing

Switching frequency (min.) ²⁾	5 Hz	4 Hz
Response time (max.) ²⁾	100 ms	120 ms
Delay before start-up	280 ms	280 ms

Electrical data

Operating voltage U _B	20 ... 30 V DC (incl. ± 10% residual ripple)
Residual ripple	± 10 % of U _B
Bias current	≤ 60 mA
Switching output	PNP transistor
Function characteristics	switching in case of object recognition
Output current	150 mA
Switching range adjustment	potentiometer 270°

Indicators

Yellow LED	output activated
------------	------------------

Mechanical data

Housing	metal / CuZn
Weight	50 g
Connection type	M12 connector, plastic, 4-pin

Environmental data

Ambient temp. (operation/storage)	-25°C ... +70°C/-40°C ... +85°C
Protective circuit ³⁾	1, 2, 3
VDE safety class	III
Protection class	IP 67
Standards applied	IEC 60947-5-2
Fitting position	any

1) For the complete temperature range, measured object ≥ 10x10mm

2) Can be configured up to 3 times faster using "USDS-Config"

3) 1=short-circuit and overload protection, 2=polarity reversal protection, 3=wire break and inductive protection

Remarks


Approved purpose:

The ultrasonic sensors are used for acoustic, contactless detection of objects.


Tables

Diagrams

HRTU...-5010-300...

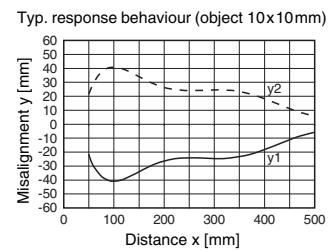

HRTU...-3010-1000...

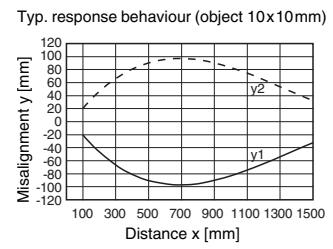

Remarks

- Synchronisation:
Mutual interference is excluded by connecting the sensors with the SYNC input.

Configuration software "USDS-Config"

The configuration software runs under Windows 95/98/NT/2000/XP and offers the following features:

- Configuration of multiplex operation
- Configuration of the sensor (attenuation, switching frequency, response time)
- Adjustment of the switching output (start/end of switching range, hysteresis, object present yes/no)
- Adjustment of the analogue output
- Support of various languages

Order guide

Designation	Part No.
HRTU 418M/P-5010-300-S12	500 36257
HRTU 418M/P-3010-1000-S12	500 36258