

Technical data sheet

Distribution box

Part no.: 50130604

MD 7XXP-11-82IO5-K050



Figure can vary

Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Circuit diagrams
- Operation and display
- Accessories



Technical data

Electrical data

Inputs	
Switching element	PNP
Performance data	
Total current	10 A
Input data logic	
Nominal input voltage U_N	24 V DC

Connection

Master connection	
Type of connection	Cable
Function	Connection to the control
Cable length	5,000 mm
Cable properties	
Number of conductors	19 Piece(s)
Wire cross section	16 x 0.34 mm ²
	3 x 0.75 mm ²
AWG	22
Sheathing color	Gray
Shielded	No
Silicone-free	No
Cable design	Connection cable (open on one end)
Cable diameter (external)	10 mm
Cable length	5,000 mm
Sheathing material	PUR / PVC
Wire insulation	PVC
Suitability for drag chains	Yes
Resistance of the outer sheathing	Hydrolysis and microbe resistant, good oil, gasoline and chemical resistance in accordance with VDE 0472 part 803 test B, flame retardant in accordance with UL 1581 VW1 / CSA FT1 / IEC 60332-1, IEC 60332-2-2

Distribution box connections	
Number of connections	8 Piece(s)
Thread size	M12
No. of pins	5 -pin
Encoding	A-coded
Type	Female
Material	Plastic
Material of O-ring seal	TPU
Material of contacts	Gold-plated
Operating current per contact	4 A

Mechanical data

Design	Cubic
Dimension (W x H x L)	50 mm x 32 mm x 140 mm
Housing material	Plastic
Net weight	1,060 g
Screw tightening torque	1 N·m
Bending cycles	2,000,000 Piece(s)
Bending radius, flexible laying, min.	Min. 12 x cable diameter

Operation and display

Type of display	LED
-----------------	-----

Environmental data

Ambient temperature, operation	-5 ... 70 °C
--------------------------------	--------------

Certifications


Degree of protection	IP 65
	IP 67
Certifications	c UL US

Classification

Customs tariff number	85444290
eCl@ss 5.1.4	27279201
eCl@ss 8.0	27279219
eCl@ss 9.0	27440108
eCl@ss 10.0	27440108
eCl@ss 11.0	27440108
ETIM 5.0	EC002585
ETIM 6.0	EC002585
ETIM 7.0	EC002585

Dimensioned drawings

All dimensions in millimeters

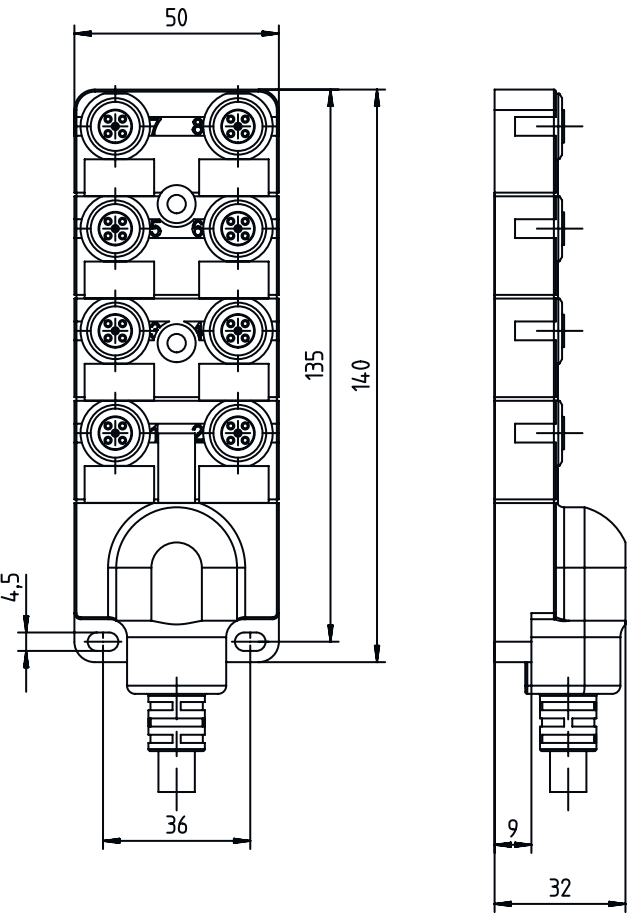

Electrical connection


Connection 1

Type of connection	Cable
Conductor color	Conductor assignment
Brown	+
Blue	-
Gray / Pink	Socket 1 / contact 2
White	Socket 1 / contact 4
Blue / Red	Socket 2 / contact 2
Green	Socket 2 / contact 4
Green / White	Socket 3 / contact 2
Yellow	Socket 3 / contact 4
Brown / Green	Socket 4 / contact 2
Gray	Socket 4 / contact 4
White / Yellow	Socket 5 / contact 2
Pink	Socket 5 / contact 4
Brown / Yellow	Socket 6 / contact 2


Electrical connection

Conductor color	Conductor assignment
Red	Socket 6 / contact 4
Gray / White	Socket 7 / contact 2
Black	Socket 7 / contact 4
Brown / Gray	Socket 8 / contact 2
Violet	Socket 8 / contact 4
Green / Yellow	PE

Pin	Pin assignment
1	+
2	Signal 2 (NC)
3	-
4	Signal 1 (NO)
5	PE



Circuit diagrams

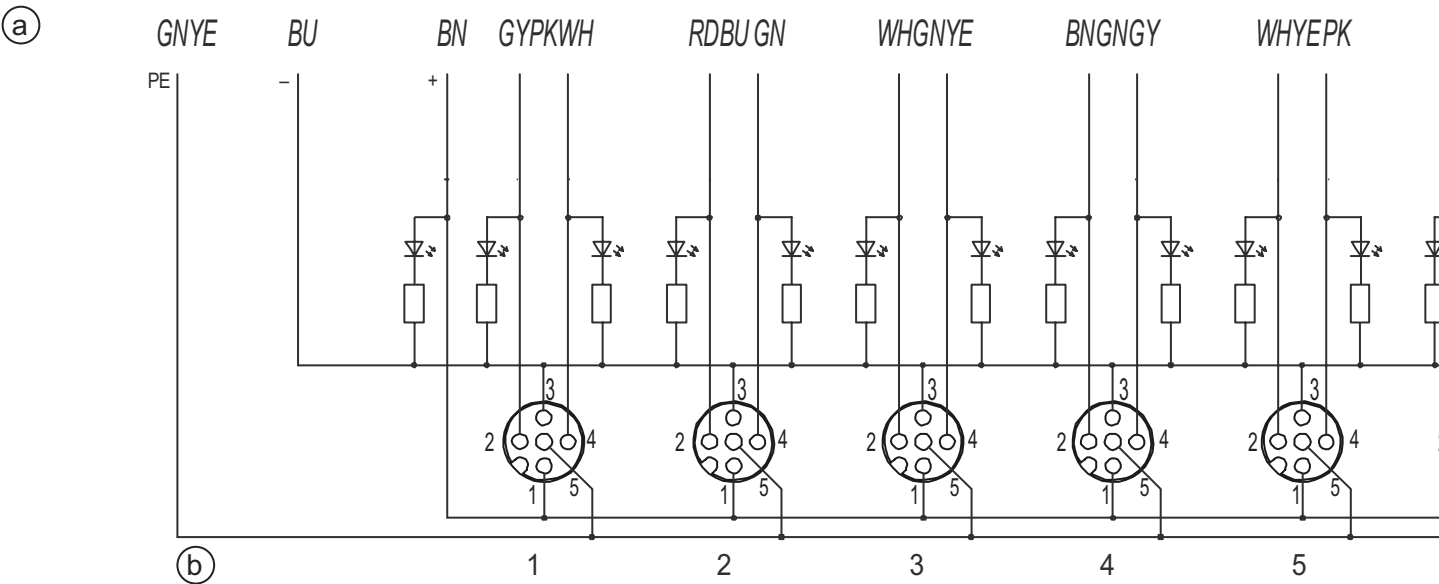

a Cable

b Socket

NOTE M12 socket, 4-pin: contact 2 not connected

Operation and display

LED	Display	Meaning
1	Green, continuous light	Operating voltage applied
2	Yellow, continuous light	Signal 1
3	White, continuous light	Signal 2

Accessories

General

	Part no.	Designation	Article	Description
	50134480	CAP M12K-Set	Connection cap	Type: Cap for free sockets Thread size: M12 Material: Plastic

Note

 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.