

Technical data sheet

Muting sensor set

Part no.: 426371

MSSU-H46

Contents

- Set consists of
- Technical data

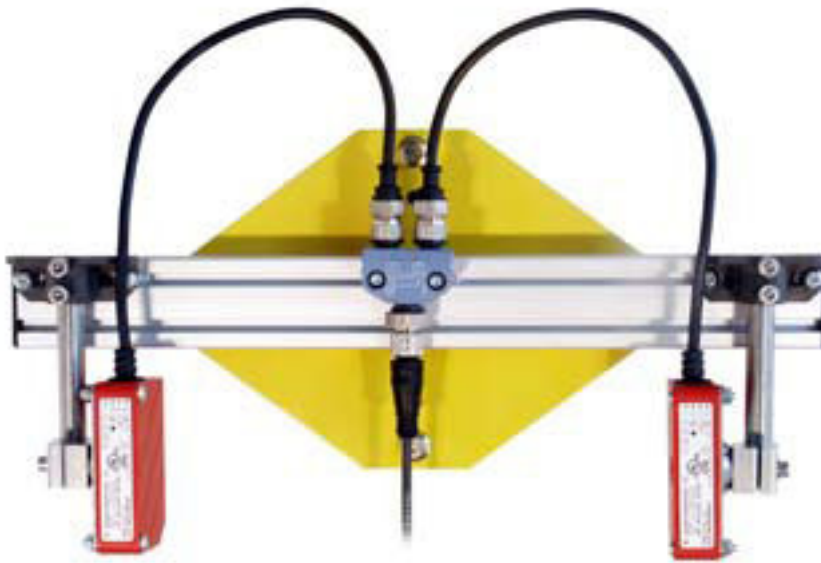




Figure can vary

Set consists of

	Quantity	Part no.	Designation	Article	Description
	1	548040	CB-M12-ACY3/1	Distribution box	Connection 1: Connector, M12, Axial, Male, 4 -pin Connection 2: Connector, M12, Axial, Female, 4 -pin Connection 3: Connector, M12, Axial, Female, 4 -pin
	1	548804	MMS-A-350	Muting mounting system	Suitable for: COMPACTplus multiple light beam safety devices, MLD 330, MLD 530 multiple light beam safety devices Type of muting mounting system: Active side Length: 250 mm Rod diameter: 12 mm Number of rods: 2 Piece(s) Mounting: Screw type, Mounting on Device Column

Technical data

Basic data

Suitable for	UDC-S1, DC-S1 device columns
	UDC-S2, DC-S2 device columns

Functions

Functions	Timing controlled 4-sensor muting
-----------	-----------------------------------

Protective field data

Operating range	0 ... 2.5 m
-----------------	-------------

Connection

Cable properties

Cable length of muting sensors	300 mm
--------------------------------	--------

Mechanical data

Length	350 mm
Net weight	1,270 g
Housing color	Silver
Type of fastening	Groove mounting
Type of muting sensors	IHRT diffuse reflection sensors
Number of muting sensors	2 Piece(s)
Number of reflectors	0 Piece(s)

Classification

Customs tariff number	85365019
eCl@ss 5.1.4	27279290
eCl@ss 8.0	27279290
eCl@ss 9.0	27279090
eCl@ss 10.0	27272792
eCl@ss 11.0	27272792
ETIM 5.0	EC002498
ETIM 6.0	EC003015
ETIM 7.0	EC003015