

Technical data sheet

Rotary encoder Series Information

Part no.: 90000430

EI30-P 058 BB

Contents

- Technical data
- Part number code



For illustration purposes only

Encoder series	EI 058 BB
Encoder_Basic principle	incremental
Encoder_Operating principle	optically interpolated
Encoder_Flange diameter	Ø 58 mm
Encoder_Flange type	Blind hole
Encoder_Solid shaft/Hollow shaft	Hollow shaft
Encoder_Shaft diameter	Ø 10 mm
	Ø 12 mm
	Ø 15 mm
	Ø 6 mm
	Ø 7 mm
	Ø 8 mm
Encoder_Supply voltage	10 ... 30V DC
	4.75 ... 5.5 V DC
	5 – 30V DC
Encoder_Output circuit	1 Vss Sin/Cos
	HTL
	HTL, inv.
	TTL
	TTL, RS422 compatible, inv.
Encoder_Pulse count	1000 I/U
	10000 I/U
	10240 I/U
	12500 I/U
	16384 I/U
	2000 I/U
	20000 I/U
	20480 I/U
	2500 I/U
	25000 I/U
	4000 I/U
	4096 I/U
	5000 I/U
	8000 I/U
	8192 I/U

Technical data

Encoder EI30 P 058 BB

Resolution

Pulses per revolution ppr	up to 25000 PPR
---------------------------	-----------------

Mechanical Data

Flange	hollow shaft (blind-bored)
Flange material	aluminum
Housing material	die cast aluminum, powder coated
Torque supports	incl. 1 torque support
- 1. Spring plate compensation	axial: ± 0.8 mm [0.0315"], radial: ± 0.2 mm [0.0079"]
- Max. operating speed	6000 rpm up to max. protection rating +60 °C
- 2. Cylinder pin 4 mm	needs accessories
- Compensation	axial: ± 0.5 mm [0.0197"], radial: ± 1.5 mm [0.0591"], Max. operating speed: 3000 rpm
Flange diameter	$\varnothing$ 58 mm [$\varnothing$ 2.283"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1.6 Ncm [2.266 in-ozf] at ambient temperature
Fixing	permanently attached clamping ring

Shaft	$\varnothing$ 6 mm [$\varnothing$ 0.236"]
Advice	with adapter sleeve
Shaft length	L: 35 mm [1.378"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	39 mm [1.535"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 6.35 mm [$\varnothing$ 1/4"] Order No: 2Z
Advice	with adapter sleeve
Shaft length	L: 35 mm [1.378"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	39 mm [1.535"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 7 mm [$\varnothing$ 0.276"]
Advice	with adapter sleeve
Shaft length	L: 35 mm [1.378"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	39 mm [1.535"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 8 mm [$\varnothing$ 0.315"]
Shaft length	L: 35 mm [1.378"]

Insertion depth min.	11 mm [0.433"]
Insertion depth max.	39 mm [1.535"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 9.525 mm [$\varnothing$ 3/8"] Order No: 4Z
Advice	with adapter sleeve
Shaft length	L: 35 mm [1.378"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	39 mm [1.535"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 10 mm [$\varnothing$ 0.394"]
Shaft length	L: 35 mm [1.378"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	39 mm [1.535"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 12 mm [$\varnothing$ 0.472"]
Shaft length	L: 35 mm [1.378"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	39 mm [1.535"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 12.7 mm [$\varnothing$ 1/2"] Order No: 3Z
Advice	with adapter sleeve
Shaft length	L: 35 mm [1.378"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	39 mm [1.535"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 15 mm [$\varnothing$ 0.591"]
Shaft length	L: 35 mm [1.378"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	39 mm [1.535"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Technical data

Encoder EI30 P 058 BB

Bearings

Bearings type	2 precision ball bearings
Nominale service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 1 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	6000 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 6000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4.75 VDC up to 30 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL ≤ 5000 ppr: max. 200 kHz HTL ≤ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C4, C6, D4, D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany


General Data

Weight	approx. 220 g [7.76 oz]
Connections	cable or connector, radial
Protection rating (EN 60529)	Housing: IP65, IP67; shaft sealed: IP65
Operating temperature	Connector: -40 °C up to +85 °C, Cable: -20 °C up to +80 °C (Option ACA: -40 °C up to +85 °C). Connector: -40 °F up to +185 °F, Cable: -4 °F up to +176 °F, Option ACA: -40 °F up to +185 °F 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	Connector: -40 °C up to +85 °C, Cable: -30 °C up to +80 °C (Option ACA: -40 °C up to +85 °C) Connector: -40 °F up to +185 °F, cable: -22 °F up to +176 °F, (Option ACA: -40 °F up to +185 °F)

Technical data

Encoder EI30 P 058 BB

Cable connection R-N, R-C, radial with 2 m cable

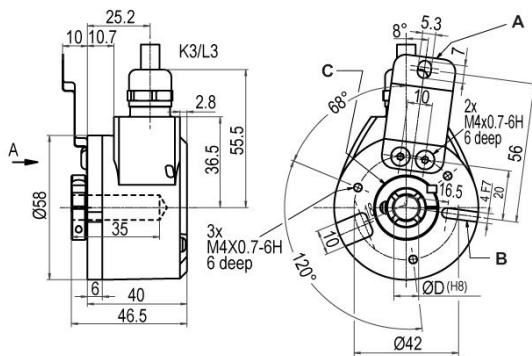

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

All dimensions in mm

Description


N inv. poss.

R-N	radial, shield not connected	•
R-C	radial, shield connected to encoder housing	•

Assignments

	R-N, R-C	R-N, R-C	R-C
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	–
A inv.	–	RD	YE
B inv.	–	BK, (BU at LT)	PK
N inv.	–	VT	–
Shield	flex	flex	flex

Connector (M16x0.75) R, radial, 5-, 6-, 8-, 12-pin

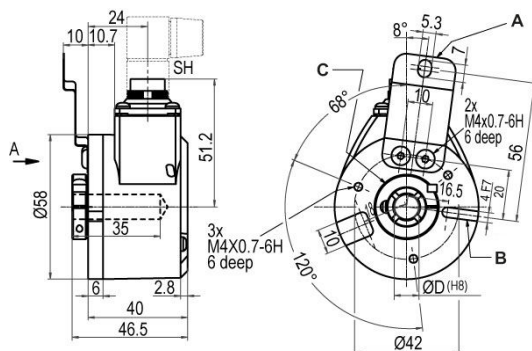

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

All dimensions in mm

Technical data





Encoder EI30 P 058 BB

Description


N inv. poss.

R5	radial, 5-pin, Connector connected to encoder housing	—
R6	radial, 6-pin, Connector connected to encoder housing	—
R8	radial, 8-pin, Connector connected to encoder housing	•
R12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	R5	R6	R8	R8	R12	R12
	5-pin	6-pin	8-pin	8-pin	12-pin	12-pin
						
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7	D8
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	—	C	—
—	—	—	—	—	—	—
A inv.	—	—	6	6	F	F
B inv.	—	—	7	7	A	A
N inv.	—	—	8	—	D	—
n. c.	—	5	—	5, 8	G, J	D, G, J
Shield	—	—	—	—	—	—

Connector (M16x0.75) R7, radial, 7-pin

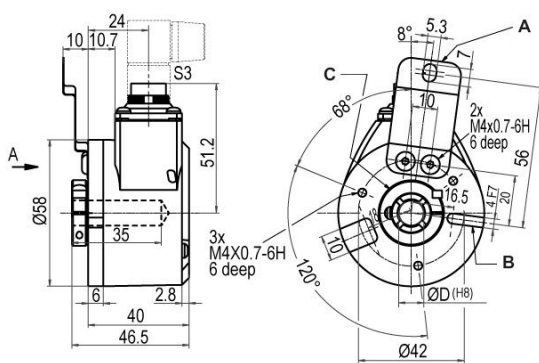

All dimensions in mm

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

Description

N inv. poss.

R7	radial, 7-pin, Connector connected to encoder housing	—
-----------	---	---


Technical data

Encoder EI30 P 058 BB

Assignments

R7	
7-pin	
	
Circuit	C3, C4, C5, C6, C7
GND	1
(+) Vcc	2
A	3
B	4
N	5
–	–
A inv.	–
B inv.	–
N inv.	–
n. c.	6, 7
Shield	–

Connector (M23) R12M, radial, 12-pin

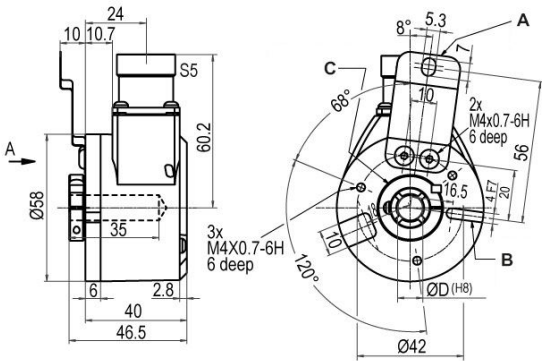

All dimensions in mm


- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

Description

N inv. poss.

R12M radial, 12-pin, Connector connected to encoder housing

Assignments

R12M			
12-pin			
			
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12


Technical data

Encoder EI30 P 058 BB

Assignments

A	5	5	5
B	8	8	8
N	3	3	–
–	–	–	–
A inv.	–	6	6
B inv.	–	1	1
N inv.	–	4	–
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	–	–	–

Connector (M23) RC12, radial, 12-pin (clockwise)

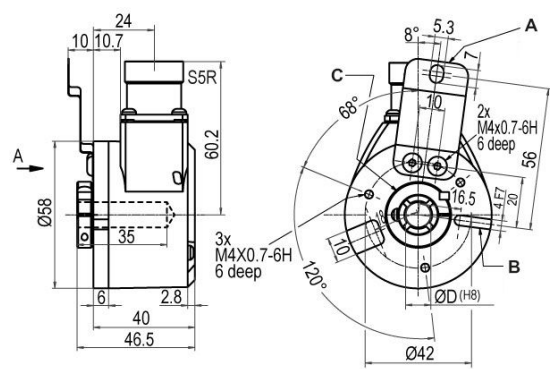

All dimensions in mm

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

Description

N inv. poss.

RC12 radial, 12-pin, Connector connected to encoder housing

Assignments

	RC12 12-pin	RC12 12-pin	RC12 12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	–
–	–	–	–
A inv.	–	6	6
B inv.	–	1	1
N inv.	–	4	–


Technical data

Encoder EI30 P 058 BB

Assignments

n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	—	—	—

Sensor-connector (M12x1) RS, radial, 4-, 5-, 8-, 12-pin

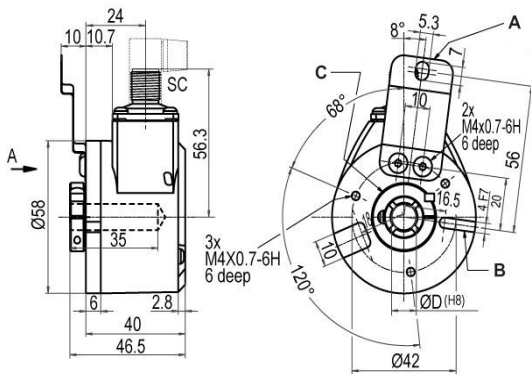

All dimensions in mm

- A Spring plate as torque support
 B Groove for cylinder pin as torque support DIN7-D4mm
 B Clamping ring

Description

N inv. poss.

RS4	radial, 4-pin, Connector connected to encoder housing	—
RS5	radial, 5-pin, Connector connected to encoder housing	—
RS8	radial, 8-pin, Connector connected to encoder housing	•
RS12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	RS4 4-pin	RS5 5-pin	RS8 8-pin	RS8 8-pin	RS12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	2	4	3	3	4
B	4	2	4	5	6
N	—	5	5	—	8
—	—	—	—	—	—
A inv.	—	—	6	4	9
B inv.	—	—	7	6	7
N inv.	—	—	8	—	10
n. c.	—	—	—	7, 8	2, 5, 11, 12
Shield	—	—	—	—	—

Technical data

Encoder EI30 P 058 BB

Options

Low-friction bearings	Order key
The encoder EI30 P 058 BB is also available as a particularly smooth- running low-friction encoder. The starting torque is thereby changed to approx. ≤ 0.6 Ncm [0.85 in-ozf] at ambient temperature and the protection class at the shaft input to IP50.	LB
Low temperature	Order key
The encoder EI30 P 058 BB with the output circuit types C1, C2, C3, C4, C5, C6, D3, D4, D5, D6 is also available with the extended temperature range -40 °C up to +85 °C [-40 °F up to +185 °F] (measured at the flange).	LT
Pressure equalising membrane	Order key
The EI30 P 058 BB shaft encoder is also optionally available with a pressure equalising membrane. This prevents water from penetrating into the encoder housing in the case of high air humidity. The IP67 protection level, temperature range and salt spray resistance are maintained. Resistant to chemicals and solvents in accordance with DIN EN ISO 2812-1.	PE
Cable length	Order key
The encoder EI30 P 058 BB can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency. Please extend the standard order code with a three figure number, specifying the cable length in decimetres. Example: 5 m cable = 050	XXX = Decimeter

Technical data

Encoder EI30 P 058 BB

Example Order No.	Type																																																													
EI30 P 058 BB	EI30 P 058 BB																																																													
	EI30 P 058 BB																																																													
Shaft																																																														
10	06; 2Z; 07; 08; 4Z; 10; 12; 3Z; 15																																																													
Pulses per revolution ppr:																																																														
1024	4, 6, 25, 36, 50, 60, 64, 70, 88, 100, 120, 125, 150, 180, 200, 240, 250, 256, 300, 360, 400, 500, 512, 600, 720, 750, 768, 800, 900, 1000, 1024, 1200, 1250, 1270, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 4000, 4096, 5000, 8000, 8192, 10000, 10240, 12500, 16384, 20000, 20480, 25000 1 Vpp Sin/Cos only 1024, 2048 Other pprs on request																																																													
Channels:																																																														
N	B, N (SIN: B)																																																													
Output circuit																																																														
C6	<table><tr><th>Resoluti- on ppr</th><th>Power sup- ply VDC</th><th>Output circuit</th><th>—</th><th>Order key</th></tr><tr><td rowspan="2">up to 2500</td><td>5 - 30</td><td>HTL (TTL at 5 VDC)</td><td>—</td><td>C7</td></tr><tr><td>5 - 30</td><td>HTL, inv. (TTL/RS422 comp. at 5 VDC)</td><td>—</td><td>D7</td></tr><tr><td rowspan="4">up to 5000</td><td>4.75 - 5.5</td><td>TTL</td><td>—</td><td>C5</td></tr><tr><td>4.75 - 5.5</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>D5</td></tr><tr><td>10 - 30</td><td>HTL</td><td>—</td><td>C6</td></tr><tr><td>10 - 30</td><td>HTL inverted</td><td>—</td><td>D6</td></tr><tr><td rowspan="6">(higher fre- quency) 1200 up to 25000</td><td>10 - 30</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>C1</td></tr><tr><td>4.75 - 5.5</td><td>TTL</td><td>—</td><td>C3</td></tr><tr><td>4.75 - 5.5</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>D3</td></tr><tr><td>10 - 30</td><td>HTL</td><td>—</td><td>C4</td></tr><tr><td>10 - 30</td><td>HTL inverted</td><td>—</td><td>D4</td></tr><tr><td>10 - 30</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>C2</td></tr><tr><td>1024, 2048</td><td>4.75 - 5.5</td><td>1 Vpp sin/cos</td><td>—</td><td>D8</td></tr></table>	Resoluti- on ppr	Power sup- ply VDC	Output circuit	—	Order key	up to 2500	5 - 30	HTL (TTL at 5 VDC)	—	C7	5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	—	D7	up to 5000	4.75 - 5.5	TTL	—	C5	4.75 - 5.5	TTL, RS422 comp., inverted	—	D5	10 - 30	HTL	—	C6	10 - 30	HTL inverted	—	D6	(higher fre- quency) 1200 up to 25000	10 - 30	TTL, RS422 comp., inverted	—	C1	4.75 - 5.5	TTL	—	C3	4.75 - 5.5	TTL, RS422 comp., inverted	—	D3	10 - 30	HTL	—	C4	10 - 30	HTL inverted	—	D4	10 - 30	TTL, RS422 comp., inverted	—	C2	1024, 2048	4.75 - 5.5	1 Vpp sin/cos	—	D8
	Resoluti- on ppr	Power sup- ply VDC	Output circuit	—	Order key																																																									
	up to 2500	5 - 30	HTL (TTL at 5 VDC)	—	C7																																																									
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	—	D7																																																									
	up to 5000	4.75 - 5.5	TTL	—	C5																																																									
		4.75 - 5.5	TTL, RS422 comp., inverted	—	D5																																																									
		10 - 30	HTL	—	C6																																																									
		10 - 30	HTL inverted	—	D6																																																									
	(higher fre- quency) 1200 up to 25000	10 - 30	TTL, RS422 comp., inverted	—	C1																																																									
		4.75 - 5.5	TTL	—	C3																																																									
		4.75 - 5.5	TTL, RS422 comp., inverted	—	D3																																																									
		10 - 30	HTL	—	C4																																																									
		10 - 30	HTL inverted	—	D4																																																									
		10 - 30	TTL, RS422 comp., inverted	—	C2																																																									
1024, 2048	4.75 - 5.5	1 Vpp sin/cos	—	D8																																																										

Technical data

Encoder EI30 P 058 BB

Electrical connections

Description		N inv. poss.	Order key
R-N	Cable: length (2 m standard)		
	radial, shield not connected	•	R-N
	radial, shield connected to encoder housing	•	R-C
	Connector: (shield connected to encoder housing)		
	connector, M16x0.75, 5-pin, radial	–	R5
	connector, M16x0.75, 6-pin, radial	–	R6
	connector, M16x0.75, 8-pin, radial	•	R8
	connector, M16x0.75, 12-pin, radial	•	R12
	connector, M16x0.75, 7-pin, radial	–	R7
	connector, M23, 12-pin, radial	•	R12M
	connector, clockwise pin count, M23, 12-pin, radial	•	RC12
	sensor-connector, M12x1, 4-pin, radial	–	RS4
	sensor-connector, M12x1, 5-pin, radial	–	RS5
	sensor-connector, M12x1, 8-pin, radial	•	RS8
	sensor-connector, M12x1, 12-pin, radial	•	RS12

Options

Description	Order key
Low-friction bearings	LB
Low temperature	LT
IP55	PE
Without option	Empty
Cable length	XXX = Decimeter

Example Order No.:	EI30 P 058 BB	10	1024	N	C6	R-N	EI30 P 058 BB	Your encoder
--------------------	---------------	----	------	---	----	-----	---------------	--------------

Part number code

Part designation: **EABB CCCDDEE FFFFFFF GHJJKK LLMNOPPP RR**

A	Rotary encoder type I: Incremental S: Absolute, singleturn M: Absolute, multiturn
BB	Series 10: Entry 30: Basic 50: Extended 70: Advanced
CCC	Flange diameter 024: 24 mm 036: 36 mm 058: 58 mm 063: 63 mm 067: 67 mm 070: 70 mm 080: 80 mm 100: 100 mm 115: 115 mm
DD	Flange type BB: Hollow shaft with blind hole CC: Clamping flange (compact design) CF: Clamping flange (food and beverages) CH: Clamping flange (heavy-duty version) CL: Clamping flange HI: Hollow shaft (insulated) HO: Hollow shaft HT: Hollow shaft (special torque support) RC: Round flange (36/40 clamping flange, 58 with 6 mm shaft) RE: Round flange (expanded boreholes) RN: Round flange SC: Stator coupling SF: Screw flange (53 clamping flange, 58 food and beverages) SI: Servo flange (increased shaft load and IP protection) SQ: Square flange SR: Screw flange (36/40 clamping flange, 58 corrosion-resistant) SY: Synchro (incremental), Servo (36), Synchro (58) (absolute) TM: Speedometer (115 with 1 mm shaft, 58 motor feedback) TS: Speedometer (10 mm shaft)
EE	Shaft / bore hole diameter 06: 6 mm 07: 7 mm 08: 8 mm 08: 8 mm 10: 10 mm 11: 11 mm 12: 12 mm 14: 14 mm 15: 15 mm 06-72: Hollow bore / blind holes (6 – 72 mm)
FFFFFF	Signal / resolution Axxxx: A Bxxxx: AB Nxxxx: ABN P16384: Programmable xx: Singleturn, 1 – 16 bit xx: Multiturn, 0 – 43 bit (00 for singleturn)
G	Galvanic isolation (absolute only) 0: without 1: with
HH	Voltage supply (absolute only) 0: 10 – 32 V DC/with galvanic isolation 1: 4.75 – 5.5 V DC 2: 18 – 30 V DC
J	Operating principle M: magnetic O: optical P: optically interpolated

Part number code

KK	Interface 01: RS485 07: SSI binary 08: SSI Gray 35: CANopen 38: EtherCAT 48: PROFINET 58: EtherNet/IP
LL	Electrical connection M08: M8 connector M12: M12 connector M16: M16 connector M23: M23 connector M12BC: Bus cover connector
M	Cable outlet A: Axial R: Radial T: Tangential
NN	No. of pins xx: Number of pins
O	Shield connection (2 cable) (optional) C: connected N: not connected
PPP	Cable length xxx: Cable length (in dm)

Note

	A list with all available device types can be found on the Leuze website at www.leuze.com.
---	--

