

Karta danych technicznych

Informacje o serii enkoderów obrotowych

Nr art.: 90000370

EI30-P 058 TM

Treść

- Dane techniczne
- Kod artykułu



Ilustracja może się różnić od stanu rzeczywistego

Enkoder_Seria	EI 058 TM
Enkoder_Podstawowa zasada działania	inkrementalny
Enkoder_Zasada działania	optycznie interpolowany
Enkoder_Średnica kołnierza	Ø 58 mm
Enkoder_Typ kołnierza	Kołnierz pod tachoprądnice
Enkoder_Wał pełny/wał pusty	Wał pełny
Enkoder_Napięcie zasilania	10 ... 30 V DC
	4,75 ... 5,5 V DC
	5 ... 30 V DC
Enkoder_Układ wyjściowy	1 Vss Sin/Cos
	HTL
	HTL, odwr.
	TTL
	TTL, kompatybilny z RS422, odwr.
Enkoder_Liczba impulsów	10000 I/U
	10240 I/U
	12000 I/U
	12500 I/U
	1440 I/U
	15000 I/U
	16384 I/U
	20000 I/U
	20480 I/U
	25000 I/U
	2880 I/U
	3000 I/U
	3600 I/U
	4000 I/U
	5760 I/U
	6000 I/U
	7200 I/U
	7500 I/U
	8000 I/U
	9182 I/U

Dane techniczne

Encoder EI30 P 058 TM

Resolution

Pulses per revolution PPR	up to 25000 PPR
---------------------------	-----------------

Mechanical Data

Flange	motorfeedback flange
Flange material	aluminum
Housing material	aluminum
Flange diameter	Ø 58 mm [Ø 2.283"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature

Shaft	Ø Conus 1/10; 9.25 mm [Ø 3/8"] Order No. 10
--------------	--

Shaft length	L: 16.5 mm [0.65"]
--------------	--------------------

Max. Permissible shaft loading radial	80 N [8.157 kp]
---------------------------------------	-----------------

Max. Permissible shaft loading axial	60 N [6.118 kp]
--------------------------------------	-----------------

Bearings

Bearings type	2 precision ball bearings
Nominal service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 1 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	12000 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominal service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 12000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 V _{pp} sin/cos
Pulse frequency	TTL ≤ 5000 ppr: max. 200 kHz HTL ≤ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 V _{pp} sin/cos: max. 100 kHz
Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 V _{pp} sin/cos: min. 120 Ohm
Circuit protection	circuit type C4, C6, D4, D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany


General Data

Weight	approx. 220 g [7.76 oz]
Connections	cable output, 2 m, tangential
Protection rating (EN 60529)	Housing: IP65, IP67; shaft sealed: IP65
Operating temperature	-20 °C up to +80 °C [-4 °F up to +176 °F] 1 V _{pp} : -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	-20 °C up to +80 °C [-4 °F up to +176 °F]

Dane techniczne

Encoder EI30 P 058 TM

Cable connection T-C, tangential, with 2 m cable

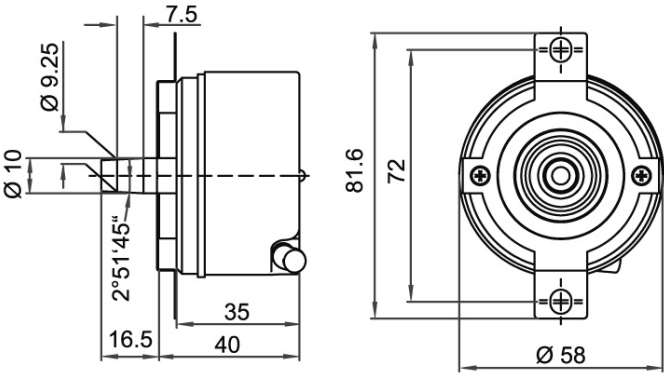

All dimensions in mm

Description

N inv. poss.

T-C tangential, shield connected to encoder housing

Assignments

	T-C	T-C	T-C
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	-
-	-	-	-
A inv.	-	RD	YE
B inv.	-	BK, (BU at LT)	PK
N inv.	-	VT	-
Shield	flex	flex	flex

Dane techniczne

Encoder EI30 P 058 TM

Options

Low-friction bearings	Order key
The encoder EI30 P 058 TM is also available as a particularly smooth- running low-friction encoder. The starting torque is thereby changed to ≤ 0.5 Ncm [0.708 in-ozf] and the protection class at the shaft input to IP50.	LB
Cable length	Order key
The encoder EI30 P 058 TM can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency. Please extend the standard order code with a three figure number, specifying the cable length in decimetres. Example: 5 m cable = 050	XXX = Decimeter

Dane techniczne

Encoder EI30 P 058 TM

Example Order No.	Type
EI30 P 058 TM	EI30 P 058 TM

Pulses per revolution PPR:

1024	4, 6, 25, 36, 50, 60, 64, 70, 88, 100, 120, 125, 150, 180, 200, 240, 250, 256, 300, 360, 400, 500, 512, 600, 720, 750, 768, 800, 900, 1000, 1024, 1200, 1250, 1270, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 4000, 4096, 5000, 8000, 8192, 10000, 10240, 12500, 16384, 20000, 20480, 25000 1 Vpp Sin/Cos only 1024, 2048 Other PPRs on request
------	---

Channels:

N	N, B (SIN: B)
---	---------------

Output circuit

	Resolution PPR	Power supply VDC	Output circuit	-	Order key
C6	up to 2500	5 - 30	HTL (TTL at 5 VDC)	-	C7
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	-	D7
	up to 5000	4.75 - 5.5	TTL	-	C5
		4.75 - 5.5	TTL, RS422 comp., inverted	-	D5
		10 - 30	HTL	-	C6
		10 - 30	HTL inverted	-	D6
		10 - 30	TTL, RS422 comp., inverted	-	C1
		10 - 30	TTL, RS422 comp., inverted	-	D3
	(higher frequency) 1200 up to 25000	4.75 - 5.5	TTL	-	C3
		4.75 - 5.5	TTL, RS422 comp., inverted	-	D3
		10 - 30	HTL	-	C4
		10 - 30	HTL inverted	-	D4
		10 - 30	TTL, RS422 comp., inverted	-	C2
	1024, 2048	4.75 - 5.5	1 Vpp sin/cos	-	D8

Electrical connections

	Description	N inv. poss.	Order key
T-C	Cable: length (2 m standard) tangential, shield connected to encoder housing	•	T-C

Options

Description	Order key
Low-friction bearings	LB
Without option	Empty
Cable length	XXX = Decimeter

Example Order No.:	EI30 P 058 TM	1024	N	C6	T-C	EI30 P 058 TM	Your encoder
--------------------	---------------	------	---	----	-----	---------------	--------------

Kod artykułu

Oznaczenie artykułu: EABB CCCDDEE FFFFFFF GHJJKK LLMNOPPP RR

A	Typ enkodera obrotowego I: Inkrementalny S: Absolutny, Singleturn M: Absolutny, Multiturn
BB	Seria 10: Entry 30: Basic 50: Extended 70: Advanced
CCC	Średnica kołnierza 024: 24 mm 036: 36 mm 058: 58 mm 063: 63 mm 067: 67 mm 070: 70 mm 080: 80 mm 100: 100 mm 115: 115 mm
DD	Typ kołnierza BB: Wał pusty z otworem nieprzelotowym CC: Kołnierz zaciskowy (kompaktowa konstrukcja) CF: Kołnierz zaciskowy (produkty spożywcze i napoje) CH: Kołnierz zaciskowy (wersja do dużych obciążeń) CL: Kołnierz zaciskowy HI: Wał pusty (izolowany) HO: Wał pusty HT: wał pusty (specjalne ramię reakcyjne) RC: Kołnierz okrągły (36/40 kołnierz zaciskowy, 58 z wałem 6 mm) RE: Kołnierz okrągły (powiększone otwory) RN: Kołnierz okrągły SC: złącze stojana SF: Kołnierz skręcany (53 kołnierz zaciskowy, 58 produkty spożywcze i napoje) SI: Kołnierz pod serwowymotor (zwiększone obciążenie wału i stopień ochrony IP) SQ: Kołnierz kwadratowy SR: Kołnierz skręcany (36/40 kołnierz zaciskowy, 58 odporny na korozję) SY: Synchro (inkrementalny), Servo (36), Synchro (58) (absolutny) TM: Tacho (115 z wałem 1 mm, 58 motorfeedback) TS: Tacho (wał 10 mm)
EE	Średnica wału/otworu 06: 6 mm 07: 7 mm 08: 8 mm 08: 8 mm 10: 10 mm 11: 11 mm 12: 12 mm 14: 14 mm 15: 15 mm 06-72: Otwór przelotowy/nieprzelotowy (6 ... 72 mm)
FFFFFF	Sygnał/Rozdzielczość Axxxx: A Bxxxx: AB Nxxxx: ABN P16384: Programowalny xx: Singleturn, 1 ... 16 Bit xx: Multiturn, 0 ... 43 Bit (00 przy Singleturn)
G	Separacja galwaniczna (tylko absolutny) 0: bez 1: z
HH	Zasilanie napięciem (tylko absolutny) 0: 10 ... 32 V DC/z rozdzieleniem galwanicznym 1: 4,75 ... 5,5 V DC 2: 18 ... 30 V DC
J	Zasada działania M: magnetyczny O: optyczny P: optycznie interpolowany

Kod artykułu

KK	Interfejs 01: RS485 07: SSI binarny 08: SSI Gray 35: CANopen 38: EtherCAT 48: PROFINET 58: EtherNet/IP
LL	Przylącze elektryczne M08: wtyczka okrągła M8 M12: Wtyczka okrągła M12 M16: Wtyczka okrągła M16 M23: Wtyczka okrągła M23 M12BC: Wtyk obudowy magistrali
M	Wylot kablowy A: osiowy R: promieniowy T: Tangential
NN	Liczba pinów xx: Liczba pinów
O	Przylącze ekranu (kabel 2 m) (opcjonalnie) (C: podłączony N: niepodłączony
PPP	Długość kabla xxx: Długość kabla (w dm)

Wskazówka



Lista ze wszystkimi dostępnymi typami urządzeń znajduje się na stronie internetowej Leuze www.leuze.com.

