

Folha de dados técnicos

Informações sobre a série de encoders

N.º do art.: 90000350

EI30-P 058 CA

Conteúdo

- Dados técnicos
- Código do artigo



A imagem pode divergir

Codificador_série	EI 058 CA
Codificador_princípio básico	incremental
Codificador_princípio de funcionamento	interpolado opticamente
Codificador_diâmetro do flange	Ø 58 mm
Codificador_eixo maciço/eixo oco	Eixo oco
Codificador_diâmetro do eixo	Ø 10 mm
	Ø 6 mm
	Ø 8 mm
Codificador_tensão de alimentação	10 ... 30 V CC
	4,75 ... 5,5 V DC
	5 ... 30V CC
Codificador_circuito de saída	1 Vss Sin/Cos
	HTL
	HTL, inv.
	TTL
	TTL, RS422 compatível, inv.
Codificador_número de impulsos	10000 I/U
	10240 I/U
	12000 I/U
	12500 I/U
	1440 I/U
	15000 I/U
	16384 I/U
	20000 I/U
	20480 I/U
	25000 I/U
	2880 I/U
	3000 I/U
	3600 I/U
	4000 I/U
	5760 I/U
	6000 I/U
	7200 I/U
	7500 I/U
	8000 I/U
	9182 I/U

Dados técnicos

Encoder EI30 P 058 CA

Resolution

Pulses per revolution PPR	up to 25000 PPR
---------------------------	-----------------

Mechanical Data

Flange	clamping flange
Flange material	aluminum
Housing material	die cast aluminum, powder coated
Flange diameter	Ø 58 mm [Ø 2.283"]
Cam mounting	pitch 69 mm [2.717 inches]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature

Shaft	Ø 6 mm [Ø 0.236"]
Shaft length	L: 10 mm [0.394"]
Max. Permissible shaft loading radial	220 N [22.433 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]

Shaft	Ø 7 mm [Ø 0.276"]
Shaft length	L: 19 mm [0.748"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	50 N [5.098 kp]

Shaft	Ø 8 mm [Ø 0.315"]
Shaft length	L: 20 mm [0.787"]
Max. Permissible shaft loading radial	220 N [22.433 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]

Shaft	Ø 9.525 mm [Ø 3/8"] Order No: 4Z
Shaft length	L: 22.3 mm [0.878"]
Max. Permissible shaft loading radial	220 N [22.433 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]

Shaft	Ø 10 mm [Ø 0.394"]
Shaft length	L: 20 mm [0.787"]
Max. Permissible shaft loading radial	220 N [22.433 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]

Advice	Ø 12 mm [0.472"] on request
--------	-----------------------------

Bearings

Bearings type	2 precision ball bearings
Nominale service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 11 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	8000 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 8000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL ≤ 5000 ppr: max. 200 kHz HTL ≤ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C4, C6, D4, D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany

Dados técnicos

Encoder EI30 P 058 CA



General Data

Weight	approx. 250 g [8.818 oz]
Connections	cable or connector outlet
Protection rating (EN 60529)	Housing: IP65, IP67; shaft sealed: IP65
Operating temperature	Connector: -40 °C up to +85 °C, Cable: -20 °C up to +80 °C (Option LT: -40 °C up to +85 °C). Connector: -40 °F up to +185 °F, Cable: -4 °F up to +176 °F, Option LT: -40 °F up to +185 F° 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]

General Data

Storage temperature	Connector: -40 °C up to +85 °C, Cable: -30 °C up to +80 °C (Option LT: -40 °C up to +85 °C) Connector: -40 °F up to +185 °F, cable: -22 °F up to +176 °F, (Option LT: -40 °F up to +185 °F)
---------------------	--

Cable connection A-N, A-C, axial, with 2 m cable

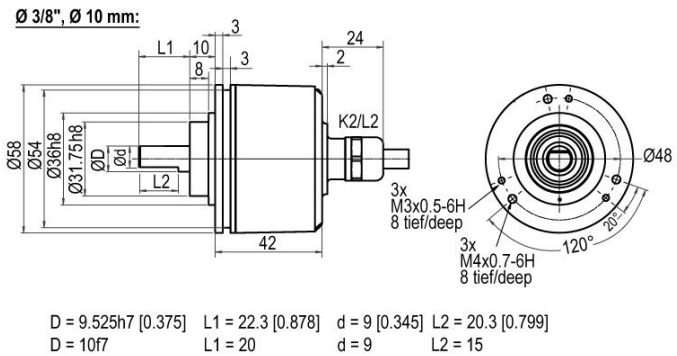

All dimensions in mm

Description

N inv. poss.

A-N	axial, shield not connected	•
A-C	axial, shield connected to encoder housing	•

Assignments

	A-N, A-C	A-N, A-C	A-C
Circuit	C3, C4, C5, C6, C7	D3, D4, D5, D6, C1, C2, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	–
–	–	–	–
A inv.	–	RD	YE
B inv.	–	BK, (BU at LT)	PK
N inv.	–	VT	–
Shield	flex	flex	flex


	R-N, R-C	R-N, R-C	R-C
Circuit	C3, C4, C5, C6, C7	D3, D4, D5, D6, C1, C2, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	–
–	–	–	–
A inv.	–	RD	YE
B inv.	–	BK, (BU at LT)	PK
N inv.	–	VT	–
Shield	flex	flex	flex

Dados técnicos

Encoder EI30 P 058 CA


Connector (M16x0.75) A, axial, 5-, 6-, 8-, 12-pin

Ø 3/8", Ø 10 mm:

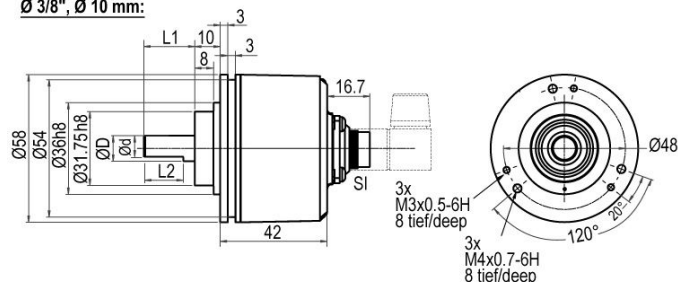

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
 D = 10f7 L1 = 20 d = 9 L2 = 15

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
 D = 7f7 L1 = 19
 D = 8h8 L1 = 19 d = 7.5 L2 = 15

All dimensions in mm

Description

N inv. poss.

A5	axial, 5-pin, Connector connected to encoder housing	—
A6	axial, 6-pin, Connector connected to encoder housing	—
A8	axial, 8-pin, Connector connected to encoder housing	•
A12	axial, 12-pin, Connector connected to encoder housing	•

Assignments


	A5	A6	A8	A8	A12	A12
	5-pin	6-pin	8-pin	8-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7	D8
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	—	C	—
—	—	—	—	—	—	—
A inv.	—	—	6	6	F	F
B inv.	—	—	7	7	A	A
N inv.	—	—	8	—	D	—
n. c.	—	5	—	5, 8	G, J	D, G, J
Shield	—	—	—	—	—	—

Dados técnicos

Encoder EI30 P 058 CA


Connector (M16x0.75) R, radial, 5-, 6-, 8-, 12-pin

Ø 3/8", Ø 10 mm:

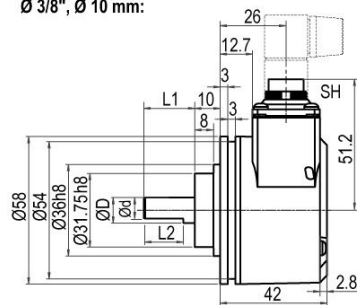

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

All dimensions in mm

Description

N inv. poss.

R5	radial, 5-pin, Connector connected to encoder housing	—
R6	radial, 6-pin, Connector connected to encoder housing	—
R8	radial, 8-pin, Connector connected to encoder housing	•
R12	radial, 12-pin, Connector connected to encoder housing	•



Assignments

	R5 5-pin	R6 6-pin	R8 8-pin	R8 8-pin	R12 12-pin	R12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7	D8
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	—	C	—
—	—	—	—	—	—	—
A inv.	—	—	6	6	F	F
B inv.	—	—	7	7	A	A
N inv.	—	—	8	—	D	—
n. c.	—	5	—	5, 8	G, J	D, G, J
Shield	—	—	—	—	—	—

Dados técnicos

Encoder EI30 P 058 CA

Connector (M16x0.75) A7, axial, 7-pin

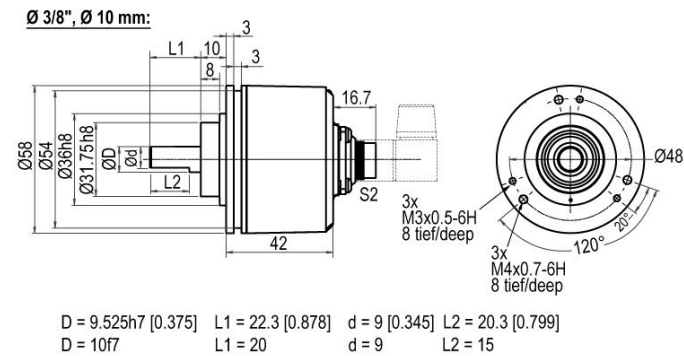

All dimensions in mm

Description

N inv. poss.


A7 axial, 7-pin, Connector connected to encoder housing

—

Assignments

A7

7-pin




Circuit	C3, C4, C5, C6, C7
GND	1
(+) Vcc	2
A	3
B	4
N	5
—	—
A inv.	—
B inv.	—
N inv.	—
n. c.	6, 7
Shield	—

Dados técnicos

Encoder EI30 P 058 CA

Connector (M16x0.75) R7, radial, 7-pin


Ø 3/8", Ø 10 mm:

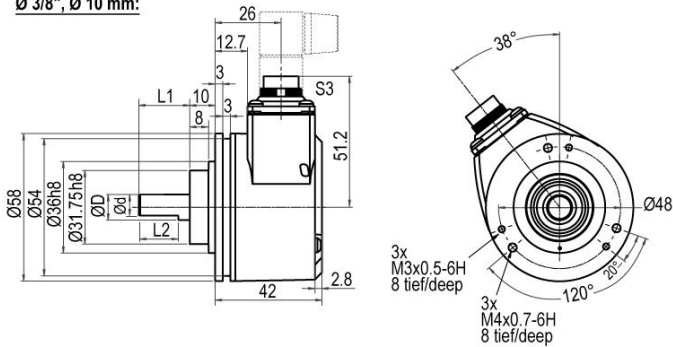

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

Description

N inv. poss.


R7 radial, 7-pin, Connector connected to encoder housing

—

Assignments

R7

7-pin





Circuit	C3, C4, C5, C6, C7
GND	1
(+) Vcc	2
A	3
B	4
N	5
—	—
A inv.	—
B inv.	—
N inv.	—
n. c.	6, 7
Shield	—

Dados técnicos

Encoder EI30 P 058 CA

Connector (M23) A12M, axial, 12-pin

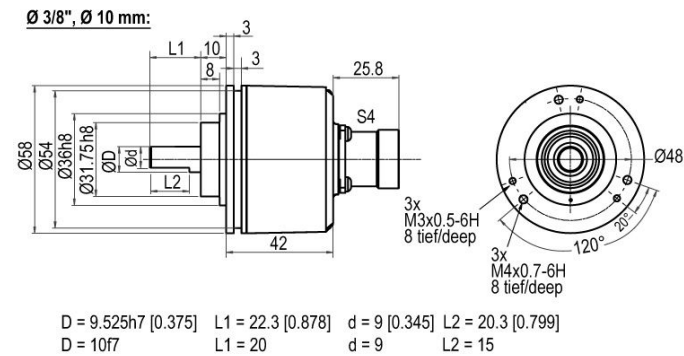

All dimensions in mm

Description

N inv. poss.

A12M axial, 12-pin, Connector connected to encoder housing

Assignments


	A12M	A12M	A12M
	12-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	—
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	—
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	—	—	—

Dados técnicos

Encoder EI30 P 058 CA

Connector (M23) R12M, radial, 12-pin


Ø 3/8", Ø 10 mm:

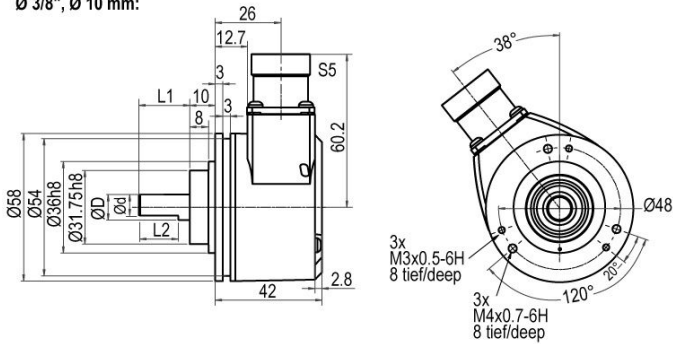

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

Description

N inv. poss.

R12M radial, 12-pin, Connector connected to encoder housing



Assignments

	R12M	R12M	R12M
	12-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	—
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	—
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	—	—	—

Dados técnicos

Encoder EI30 P 058 CA

Connector (M23) AC, axial, 12-pin (clockwise)

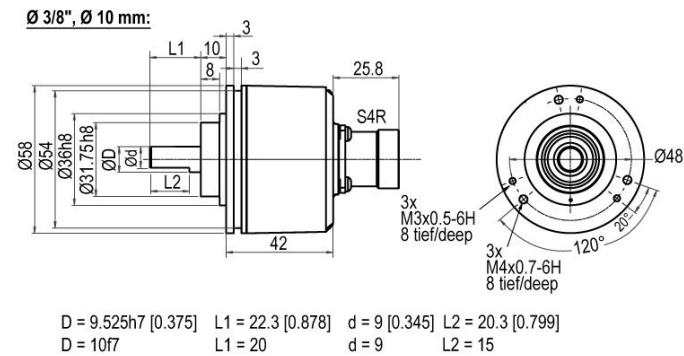




All dimensions in mm

Description

N inv. poss.

AC12 axial, 12-pin, Connector connected to encoder housing

Assignments


	AC12 12-pin	AC12 12-pin	AC12 12-pin
			
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	–
–	–	–	–
A inv.	–	6	6
B inv.	–	1	1
N inv.	–	4	–
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	–	–	–

Dados técnicos

Encoder EI30 P 058 CA

Connector (M23) RC, radial, 12-pin (clockwise)


Ø 3/8", Ø 10 mm:

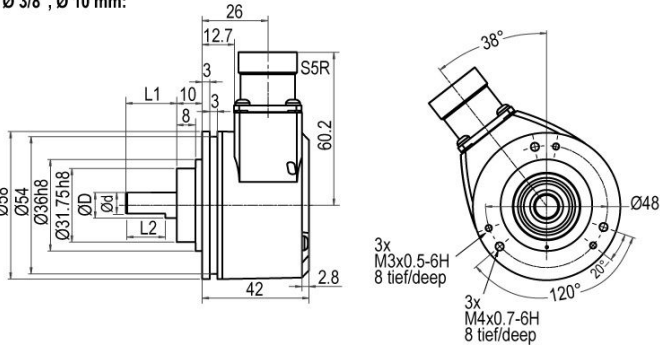

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

Description

N inv. poss.

RC12 radial, 12-pin, Connector connected to encoder housing

Assignments


	RC12	RC12	RC12
	12-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	—
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	—
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	—	—	—

Dados técnicos

Encoder EI30 P 058 CA


Sensor-connector (M12x1) AS, axial, 4-, 5-, 8-, 12-pin

Ø 3/8", Ø 10 mm:

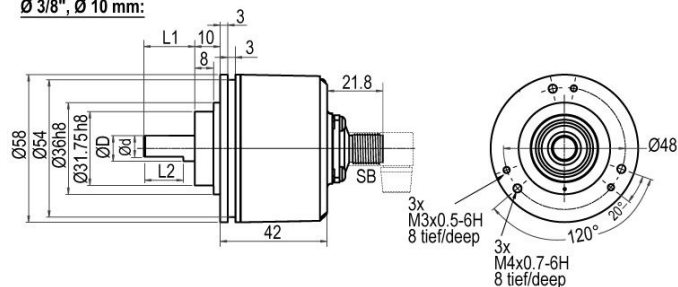

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

All dimensions in mm

Description

N inv. poss.

AS4	axial, 4-pin, Connector connected to encoder housing	—
AS5	axial, 5-pin, Connector connected to encoder housing	—
AS8	axial, 8-pin, Connector connected to encoder housing	•
AS12	axial, 12-pin, Connector connected to encoder housing	•


Assignments

	AS4 4-pin	AS5 5-pin	AS8 8-pin	AS8 8-pin	AS12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	D3, D4, D5, D6, D7, C1, C2	D8	D3, D4, D5, D6, D7, C1, C2
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	2	4	3	3	4
B	4	2	4	5	6
N	—	5	5	—	8
—	—	—	—	—	—
A inv.	—	—	6	4	9
B inv.	—	—	7	6	7
N inv.	—	—	8	—	10
n. c.	—	—	—	7, 8	2, 5, 11, 12
Shield	—	—	—	—	—

Dados técnicos

Encoder EI30 P 058 CA

Sensor-connector (M12x1) RS, radial, 4-, 5-, 8-, 12-pin

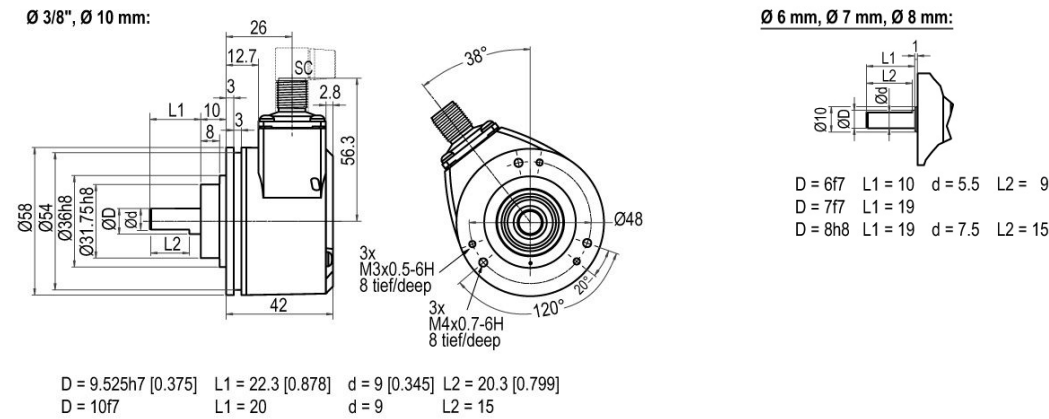

All dimensions in mm

Description		N inv. poss.
RS4	radial, 4-pin, Connector connected to encoder housing	—
RS5	radial, 5-pin, Connector connected to encoder housing	—
RS8	radial, 8-pin, Connector connected to encoder housing	•
RS12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	RS4 4-pin	RS5 5-pin	RS8 8-pin	RS8 8-pin	RS12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	2	4	3	3	4
B	4	2	4	5	6
N	—	5	5	—	8
—	—	—	—	—	—
A inv.	—	—	6	4	9
B inv.	—	—	7	6	7
N inv.	—	—	8	—	10
n. c.	—	—	—	7, 8	2, 5, 11, 12
Shield	—	—	—	—	—

Dados técnicos

Encoder EI30 P 058 CA

Options

Low-friction bearings

Order key

The encoder EI30 P 058 CA is also available as a particularly smooth- running low-friction encoder. The starting torque is thereby changed to ≤ 0.5 Ncm [0.708 in-ozf] and the protection class at the shaft input to IP50.

LB

IP67 all around

The encoder EI30 P 058 CA can be supplied in a full IP67 version. Shaft $\varnothing$ 10 mm [0.394"] without flat. IP67 not at 1 Vpp Sin/Cos. IP67 not at shaft $\varnothing$ 7 mm [0.2761"].

IP

Max. RPM: 3500 rpm
 Permitted Shaft-Loading, axial: 100 N [10.197 kp]
 Permitted Shaft-Loading, radial: 110 N [11.216 kp]
 Max. PPR: 25000 ppr
 Starting-torque: approx. 4 Ncm [5.664 in-ozf] at ambient temperature

Low temperature

Order key

The encoder EI30 P 058 CA with the output circuit types C1, C2, C3, C4, C5, C6, D3, D4, D5, D6 is also available with the extended temperature range -40 °C up to $+85$ °C [-40 °F up to $+185$ °F] (measured at the flange).

LT

Pressure equalising membrane

Order key

The EI30 P 058 CA shaft encoder is also optionally available with a pressure equalising membrane. This prevents water from penetrating into the encoder housing in the case of high air humidity.

PE

The IP67 protection level, temperature range and salt spray resistance are maintained. Resistant to chemicals and solvents in accordance with DIN EN ISO 2812-1.

Cable length

Order key

The encoder EI30 P 058 CA can be supplied with more than 2 m cable.
 The maximum cable length depends on the supply voltage and the frequency.

XXX = Decimeter

Please extend the standard order code with a three figure number, specifying the cable length in decimetres.
 Example: 5 m cable = 050

Dados técnicos

Encoder EI30 P 058 CA

Example Order No.	Type																																																																						
EI30 P 058 CA	EI30 P 058 CA																																																																						
	EI30 P 058 CA																																																																						
Shaft																																																																							
10	06; 07; 08; 4Z; 10																																																																						
Pulses per revolution PPR:																																																																							
5000	2, 5, 10, 15, 20, 25, 30, 36, 40, 48, 50, 60, 64, 72, 90, 100, 120, 125, 128, 150, 160, 180, 200, 216, 240, 250, 254, 256, 300, 314, 320, 360, 400, 500, 512, 571, 600, 720, 750, 768, 800, 900, 1000, 1024, 1200, 1250, 1270, 1440, 1500, 1800, 2000, 2048, 2400, 2500, 2880, 3000, 3600, 4000, 4096, 4685, 5000, 5760, 6000, 7200, 7500, 8000, 8192, 10000, 10240, 12000, 12500, 15000, 16384, 20000, 20480, 25000 1 Vpp Sin/Cos only 1024, 2048 Other PPRs on request																																																																						
Channels:																																																																							
N	B, N (SIN: B)																																																																						
Output circuit																																																																							
C6	<table><tr><th>Resolution PPR</th><th>Power supply VDC</th><th>Output circuit</th><th>—</th><th>Order key</th></tr><tr><td rowspan="2">up to 2500</td><td>5 - 30</td><td>HTL (TTL at 5 VDC)</td><td>—</td><td>C7</td></tr><tr><td>5 - 30</td><td>HTL, inv. (TTL/RS422 comp. at 5 VDC)</td><td>—</td><td>D7</td></tr><tr><td rowspan="6">up to 5000</td><td>4.75 - 5.5</td><td>TTL</td><td>—</td><td>C5</td></tr><tr><td>4.75 - 5.5</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>D5</td></tr><tr><td>10 - 30</td><td>HTL</td><td>—</td><td>C6</td></tr><tr><td>10 - 30</td><td>HTL inverted</td><td>—</td><td>D6</td></tr><tr><td>10 - 30</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>C1</td></tr><tr><td>10 - 30</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>D3</td></tr><tr><td rowspan="4">(higher frequency) 1200 up to 25000</td><td>4.75 - 5.5</td><td>TTL</td><td>—</td><td>C3</td></tr><tr><td>4.75 - 5.5</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>D3</td></tr><tr><td>10 - 30</td><td>HTL</td><td>—</td><td>C4</td></tr><tr><td>10 - 30</td><td>HTL inverted</td><td>—</td><td>D4</td></tr><tr><td rowspan="2">1024, 2048</td><td>10 - 30</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>C2</td></tr><tr><td>10 - 30</td><td>TTL, RS422 comp., inverted</td><td>—</td><td>D4</td></tr><tr><td>1024, 2048</td><td>4.75 - 5.5</td><td>1 Vpp sin/cos</td><td>—</td><td>D8</td></tr></table>	Resolution PPR	Power supply VDC	Output circuit	—	Order key	up to 2500	5 - 30	HTL (TTL at 5 VDC)	—	C7	5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	—	D7	up to 5000	4.75 - 5.5	TTL	—	C5	4.75 - 5.5	TTL, RS422 comp., inverted	—	D5	10 - 30	HTL	—	C6	10 - 30	HTL inverted	—	D6	10 - 30	TTL, RS422 comp., inverted	—	C1	10 - 30	TTL, RS422 comp., inverted	—	D3	(higher frequency) 1200 up to 25000	4.75 - 5.5	TTL	—	C3	4.75 - 5.5	TTL, RS422 comp., inverted	—	D3	10 - 30	HTL	—	C4	10 - 30	HTL inverted	—	D4	1024, 2048	10 - 30	TTL, RS422 comp., inverted	—	C2	10 - 30	TTL, RS422 comp., inverted	—	D4	1024, 2048	4.75 - 5.5	1 Vpp sin/cos	—	D8
	Resolution PPR	Power supply VDC	Output circuit	—	Order key																																																																		
	up to 2500	5 - 30	HTL (TTL at 5 VDC)	—	C7																																																																		
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	—	D7																																																																		
	up to 5000	4.75 - 5.5	TTL	—	C5																																																																		
		4.75 - 5.5	TTL, RS422 comp., inverted	—	D5																																																																		
		10 - 30	HTL	—	C6																																																																		
		10 - 30	HTL inverted	—	D6																																																																		
		10 - 30	TTL, RS422 comp., inverted	—	C1																																																																		
		10 - 30	TTL, RS422 comp., inverted	—	D3																																																																		
	(higher frequency) 1200 up to 25000	4.75 - 5.5	TTL	—	C3																																																																		
		4.75 - 5.5	TTL, RS422 comp., inverted	—	D3																																																																		
		10 - 30	HTL	—	C4																																																																		
		10 - 30	HTL inverted	—	D4																																																																		
	1024, 2048	10 - 30	TTL, RS422 comp., inverted	—	C2																																																																		
10 - 30		TTL, RS422 comp., inverted	—	D4																																																																			
1024, 2048	4.75 - 5.5	1 Vpp sin/cos	—	D8																																																																			

Dados técnicos

Encoder EI30 P 058 CA

Electrical connections

	Description	N inv. poss.	Order key
A-N	Cable: length (2 m standard)		
	axial, shield not connected	•	A-N
	axial, shield connected to encoder housing	•	A-C
	radial, shield not connected	•	R-N
	radial, shield connected to encoder housing	•	R-C
	Connector: (shield connected to encoder housing)		
	connector, M16x0.75, 5-pin, axial	–	A5
	connector, M16x0.75, 5-pin, radial	–	R5
	connector, M16x0.75, 6-pin, axial	–	A6
	connector, M16x0.75, 6-pin, radial	–	R6
	connector, M16x0.75, 8-pin, axial	•	A8
	connector, M16x0.75, 8-pin, radial	•	R8
	connector, M16x0.75, 12-pin, axial	•	A12
	connector, M16x0.75, 12-pin, radial	•	R12
	connector, M16x0.75, 7-pin, axial	–	A7
	connector, M16x0.75, 7-pin, radial	–	R7
	connector, M23, 12-pin, axial	•	A12M
	connector, clockwise pin count, M23, 12-pin, axial	•	AC12
	connector, M23, 12-pin, radial	•	R12M
	connector, clockwise pin count, M23, 12-pin, radial	•	RC12
	sensor-connector, M12x1, 4-pin, axial	–	AS4
	sensor-connector, M12x1, 4-pin, radial	–	RS4
	sensor-connector, M12x1, 5-pin, axial	–	AS5
	sensor-connector, M12x1, 5-pin, radial	–	RS5
	sensor-connector, M12x1, 8-pin, axial	•	AS8
	sensor-connector, M12x1, 8-pin, radial	•	RS8
	sensor-connector, M12x1, 12-pin, axial	•	AS12
	sensor-connector, M12x1, 12-pin, radial	•	RS12

Options

Description	Order key
Low-friction bearings	LB
IP67	IP
Low temperature	LT
Pressure equalising membrane	PE
Without option	Empty
Cable length	XXX = Decimeter

Example
Order No.:

EI30 P 058 CA 10 5000 N C6 A-N EI30 P 058 CA

Your enco-
der

Código do artigo

Nome do artigo: EABB CCDDDEE FFFFFFF GHJJKK LLMNOPPP RR

A	Tipo de encoder rotativo I: incremental S: absoluto, Singleturn M: absoluto, Multiturn
BB	Série 10: Entry 30: Basic 50: Extended 70: Advanced
CCC	Diâmetro do flange 024: 24 mm 036: 36 mm 058: 58 mm 063: 63 mm 067: 67 mm 070: 70 mm 080: 80 mm 100: 100 mm 115: 115 mm
DD	Tipo de flange BB: eixo oco com orifício cego CC: flange de fixação (modelo compacto) CF: flange de fixação (alimentos e bebidas) CH: flange de fixação (versão para cargas pesadas) CL: flange de fixação HI: eixo oco (isolado) HO: eixo oco HT: eixo oco (braço de torque especial) RC: flange redondo (flange de fixação 36/40, 58 com eixo de 6 mm) RE: flange redondo (orifícios expandidos) RN: flange redondo SC: acoplamento do estator SF: flange aparafusado (flange de fixação 53, 58 alimentos e bebidas) SI: flange servo (carga de onda ampliada e proteção IP) SQ: flange quadrado SR: flange aparafusado (flange de fixação 36/40, 58 resistente à corrosão) SY: Synchro (incremental), Servo (36), Synchro (58) (absoluto) TM: tacômetro (115 com eixo de 1 mm, feedback do motor 58) TS: tacômetro (eixo de 10 mm)
EE	Diâmetro do eixo/orifício 06: 6 mm 07: 7 mm 08: 8 mm 08: 8 mm 10: 10 mm 11: 11 mm 12: 12 mm 14: 14 mm 15: 15 mm 06-72: orifício oco/orifício cego (6 ... 72 mm)
FFFFFF	Sinal/resolução Axxxx: A Bxxxx: AB Nxxxx: ABN P16384: programável xx: Singleturn, 1 ... 16 Bit xx: Multiturn, 0 ... 43 Bit (00 em Singleturn)
G	Separação galvânica (somente absoluto) 0: sem 1: com
HH	Alimentação de tensão (somente absoluto) 0: 10 ... 32 V DC/com separação galvânica 1: 4,75 ... 5,5 V DC 2: 18 ... 30 V DC
J	Princípio de funcionamento M: magnético O: óptico P: interpolado opticamente

Código do artigo

KK	Interface 01: RS485 07: SSI binário 08: SSI Gray 35: CANopen 38: EtherCAT 48: PROFINET 58: EtherNet/IP
LL	Conexão elétrica M08: conector redondo M8 M12: conector redondo M12 M16: conector redondo M16 M23: conector redondo M23 M12BC: conector da tampa do barramento
M	Saída do cabo A: axial R: radial T: tangencial
NN	Número de polos xx: número de polos
O	Conexão blindada (cabo de 2m) (opcional) C: conectado N: não conectado
PPP	Comprimento do cabo xxx: comprimento do cabo (em dm)

Nota



→ Uma lista com todos os tipos de dispositivo disponíveis encontra-se na página da Leuze na Internet, em www.leuze.com.

