

技術データシート

エンコーダ シリーズ情報

製品番号: 90000460

EI30-P 100 HO

目次

- 仕様書
- 製品キー



写真と異なる場合があります

エンコーダ_シリーズ	EI 100 HO
エンコーダ_基本原理	インクリメンタル
エンコーダ_動作原理	光学的に補間された
エンコーダ_フランジ直径	Ø 100 mm
エンコーダ_フランジタイプ	中空シャフト
エンコーダ_中実シャフト/中空シャフト	中空シャフト
エンコーダ_シャフト直径	Ø 25 mm
	Ø 28 mm
	Ø 30mm
	Ø 32 mm
	Ø 38 mm
	Ø 40 mm
	Ø 42 mm
エンコーダ_供給電圧	Ø 45 mm
	10 ... 30 V DC
	4.75 ... 5.5 V DC
エンコーダ_出カスイッチ	5 ... 30V DC
	1 Vss Sin/Cos
	HTL
	HTL、inv.
	TTL
エンコーダ_インパルス数	TTL、RS422 互換性、inv.
	10240 I/U
	16384 I/U
	20480 I/U
	4096 I/U
	8192 I/U

仕様書

Encoder EI30 P 100 HO

Resolution

Pulses per revolution PPR	up to 20480 PPR
---------------------------	-----------------

Mechanical Data

Flange	hollow shaft (through-bored)
Flange material	aluminum
Housing material	aluminum, powder coated
Torque supports	incl. 1 torque support
- 1. Spring plate compensation	axial: ± 0.8 mm [0.0315"], radial: ± 0.2 mm [0.0079"]
Flange diameter	$\varnothing$ 100 mm [$\varnothing$ 3.543"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1.5 Ncm [2.124 in-ozf] at ambient temperature
Fixing	2 x M4, DIN 913; Starting torque: 2,5 Nm

Shaft	$\varnothing$ 25 mm [$\varnothing$ 0.984"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 28 mm [$\varnothing$ 1.102"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 30 mm [$\varnothing$ 1.181"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 32 mm [$\varnothing$ 1.26"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	$\varnothing$ 38 mm [$\varnothing$ 1.496"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	$\varnothing$ 40 mm [$\varnothing$ 1.575"]
--------------	---

Shaft length	L: 42 mm [1.654"]
--------------	-------------------

Insertion depth min.	52 mm [2.047"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	$\varnothing$ 42 mm [$\varnothing$ 1.654"]
--------------	---

Shaft length	L: 42 mm [1.654"]
--------------	-------------------

Insertion depth min.	52 mm [2.047"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	$\varnothing$ 45 mm [$\varnothing$ 1.772"]
--------------	---

Shaft length	L: 42 mm [1.654"]
--------------	-------------------

Insertion depth min.	52 mm [2.047"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Bearings

Bearings type	2 precision ball bearings
Nominale service life	3 x 10 ¹⁰ revs. at 100 % rated shaft load 1 x 10 ¹¹ revs. at 40 % rated shaft load 1 x 10 ¹² revs. at 20 % rated shaft load
Max. operating speed	3500 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹² revs. at 20 % rated shaft load and 3500 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4.75 VDC up to 30 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL $\leq$ 5000 ppr: max. 200 kHz HTL $\leq$ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz

仕様書

Encoder EI30 P 100 HO

Electrical Data

Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C6 and D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160


Duty information

Customs tariff number:	90318020
Country of origin:	Germany

General Data

Weight	approx. 720 g [25.397 oz]
Connections	cable or connector, radial
Protection rating (EN 60529)	IP54
Operating temperature	-20 °C up to +80 °C [-4 °F up to +176 °F] 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	-30 °C up to +80 °C [-22 °F up to 176 °F]

Cable connection R-N, R-C radial with 2 m cable

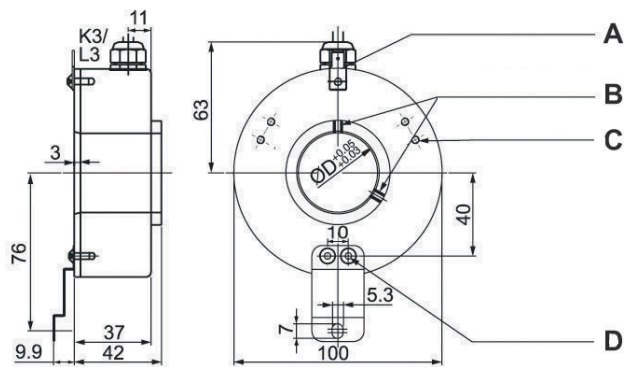

All dimensions in mm

- A Plug-in connexctor for functional ground connection
(flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description

N inv. poss.

R-N	radial, shield not connected	•
R-C	radial, shield connected to encoder housing	•

Assignments

	R-N, R-C	R-N, R-C	R-C
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN


仕様書

Encoder EI30 P 100 HO

Assignments

B	YE	YE	GY
N	GY	GY	BK
	–	–	–
A inv.	–	RD	YE
B inv.	–	BK, (BU at LT)	PK
N inv.	–	VT	–
Shield	flex	flex	flex

Connector (M16x0.75) R, radial, 5-, 6-, 8-, 12-pin

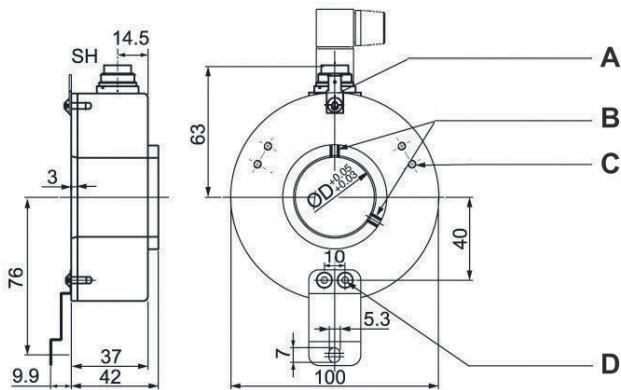

All dimensions in mm

- A Plug-in connector for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description

N inv. poss.

R5	radial, 5-pin, Connector connected to encoder housing	–
R6	radial, 6-pin, Connector connected to encoder housing	–
R8	radial, 8-pin, Connector connected to encoder housing	•
R12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	R5 5-pin	R6 6-pin	R8 8-pin	R8 8-pin	R12 12-pin	R12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7	D8
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	5	C	C
–	–	–	–	–	–	–
A inv.	–	–	6	6	F	F
B inv.	–	–	7	7	A	A


仕様書

Encoder EI30 P 100 HO

Assignments

N inv.	-	-	8	8	D	D
n. c.	-	5	-	-	G, J	G, J
Shield	-	-	-	-	-	-

Connector (M16x0.75) R7, radial, 7-pin

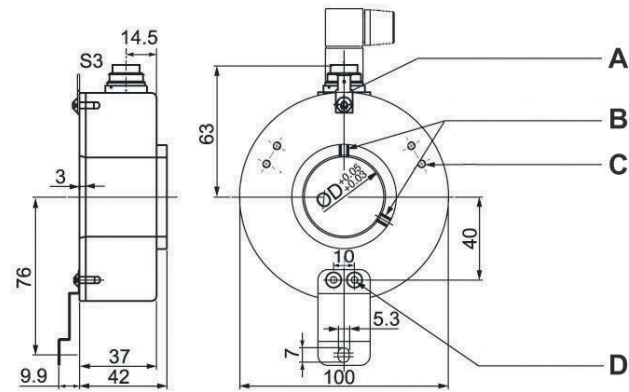

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description


N inv. poss.

R7 radial, 7-pin, Connector connected to encoder housing

-

Assignments

R7
7-pin




Circuit	C3, C4, C5, C6, C7
GND	1
(+) Vcc	2
A	3
B	4
N	5
-	-
A inv.	-
B inv.	-
N inv.	-
n. c.	6, 7
Shield	-

仕様書

Encoder EI30 P 100 HO

Connector (M23) R12M, radial, 12-pin

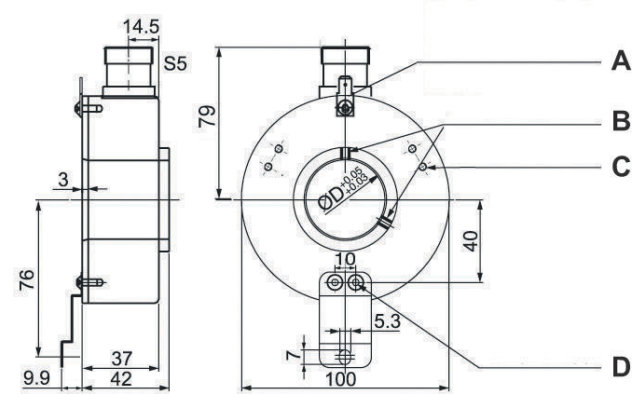

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support


Description		N inv. poss.
R12M	radial, 12-pin, Connector connected to encoder housing	•

	R12M	R12M	R12M
	12-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	3
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 7, 9, 11
Shield	—	—	—

仕様書

Encoder EI30 P 100 HO

Connector (M23) RC12, radial, 12-pin (clockwise)

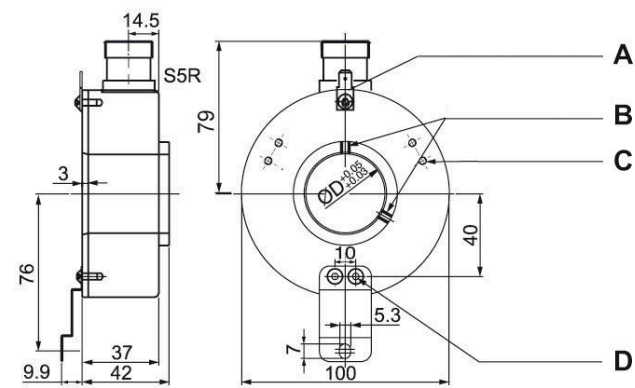

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description		N inv. poss.
RC12	radial, 12-pin, Connector connected to encoder housing	•


Assignments			
	RC12 12-pin	RC12 12-pin	RC12 12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	3
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 7, 9, 11
Shield	—	—	—

Hier waren die falschen Bilder drin: es fehlte unten rechts das R

仕様書

Encoder EI30 P 100 HO

Sensor-connector (M12x1) RS, radial, 4-, 5-, 8-, 12-pin

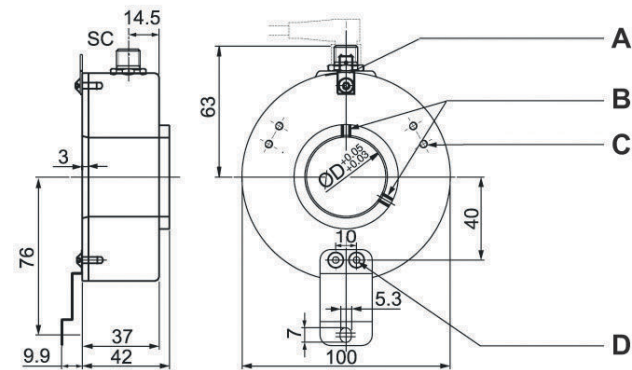

All dimensions in mm

- A Plug-in connexctor for functional ground connection (flat pin 6.3 x 0.8 according to DIN 46244)
- B 2x threaded pin M4
- C 6x M4x0.7-6H - 6 deep
- D Spring plate as torque support

Description		N inv. poss.
RS4	radial, 4-pin, Connector connected to encoder housing	—
RS5	radial, 5-pin, Connector connected to encoder housing	—
RS8	radial, 8-pin, Connector connected to encoder housing	•
RS12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	RS4 4-pin	RS5 5-pin	RS8 8-pin	RS8 8-pin	RS12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	2	4	3	3	4
B	4	2	4	5	6
N	—	5	5	—	8
—	—	—	—	—	—
A inv.	—	—	6	4	9
B inv.	—	—	7	6	7
N inv.	—	—	8	—	10
n. c.	—	—	—	7, 8	2, 5, 11, 12
Shield	—	—	—	—	—

仕様書

Encoder EI30 P 100 HO

Options

Low temperature	Order key
The encoder EI30 P 100 HO with the output circuit types C4, C6, D4, D6, C3, C5, D3, D5, C1, C2 is also available with the extended temperature range -40 °C up to +85 °C [-40 °F up to +185 °F] (measured at the flange).	LT
Pressure equalising membrane	Order key
The EI30 P 100 HO shaft encoder is also optionally available with a pressure equalising membrane. This prevents water from penetrating into the encoder housing in the case of high air humidity. The IP67 protection level, temperature range and salt spray resistance are maintained. Resistant to chemicals and solvents in accordance with DIN EN ISO 2812-1. Max. RPM: 1500 rpm Permitted Shaft-Loading, axial: 100 N [10.197 kp] Permitted Shaft-Loading, radial: 120 N [12.236 kp] Max. PPR: 20480 ppr Starting-torque: approx. 5 Ncm [7.081 in-ozf] at ambient temperature	PE
Cable length	Order key
The encoder EI30 P 100 HO can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency. Please extend the standard order code with a three figure number, specifying the cable length in decimetres. Example: 5 m cable = 050	XXX = Decimeter

仕様書

Encoder EI30 P 100 HO

Example Order No.	Type				
EI30 P 100 HO	EI30 P 100 HO				
	EI30 P 100 HO				
Shaft					
25	25; 28; 30; 32; 38; 40; 42; 45				
Pulses per revolution PPR:					
1024	512, 1024, 2048, 2500, 3600, 4096, 4500, 5000, 8192, 10240, 16384, 20480 1 Vpp Sin/Cos only 1024, 2048 Other PPRs on request				
Channels:					
N	B, N				
Output circuit					
C6	Resolution PPR	Power supply VDC	Output circuit	—	Order key
	up to 2500	5 - 30	HTL (TTL at 5 VDC)	—	C7
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	—	D7
	up to 5000	4.75 - 5.5	TTL	—	C5
		4.75 - 5.5	TTL, RS422 comp., inverted	—	D5
		10 - 30	HTL	—	C6
		10 - 30	HTL inverted	—	D6
	(higher frequency) 1200 up to 25000	10 - 30	TTL, RS422 comp., inverted	—	C1
		4.75 - 5.5	TTL	—	C3
		4.75 - 5.5	TTL, RS422 comp., inverted	—	D3
		10 - 30	HTL	—	C4
		10 - 30	HTL inverted	—	D4
		10 - 30	TTL, RS422 comp., inverted	—	C2
	1024, 2048	4.75 - 5.5	1 Vpp sin/cos	—	D8

仕様書

Encoder EI30 P 100 HO

Electrical connections

Description		N inv. poss.	Order key
R-N	Cable: length (2 m standard)		
	radial, shield not connected	•	R-N
	radial, shield connected to encoder housing	•	R-C
	Connector: (shield connected to encoder housing)		
	connector, M16x0.75, 5-pin, radial	–	R5
	connector, M16x0.75, 6-pin, radial	–	R6
	connector, M16x0.75, 8-pin, radial	•	R8
	connector, M16x0.75, 12-pin, radial	•	R12
	connector, M16x0.75, 7-pin, radial	–	R7
	connector, M23, 12-pin, radial	•	R12M
	connector, clockwise pin count, M23, 12-pin, radial	•	RC12
	sensor-connector, M12x1, 4-pin, radial	–	RS4
	sensor-connector, M12x1, 5-pin, radial	–	RS5
	sensor-connector, M12x1, 8-pin, radial	•	RS8
	sensor-connector, M12x1, 12-pin, radial	•	RS12

Options

Description		Order key
Low temperature		LT
IP55		PE
Without option		Empty
Cable length		XXX = Decimeter

Example Order No.:	EI30 P 100 HO						EI30 P 100 HO		Your enco- der
	25	1024	N	C6	R-N				

製品キー

製品名：EABB CCCDDEE FFFFFFF GHJJKK LLMNNOPPP RR

A	回転エンコーダのタイプ I：インクリメンタル S：絶対的、シングルターン M：絶対、マルチターン
BB	シリーズ 10：入力 30：ベーシック 50：拡張済み 70：先進的
CCC	フランジ直径 024：24 mm 036：36 mm 058：58 mm 063：63 mm 067：67 mm 070：70 mm 080：80 mm 100: 100 mm 115：115 mm
DD	フランジタイプ BB：ブラインドホール付きの中空シャフト CC：(コンパクトな形態) CF：クランプフランジ (食品と飲料) CH：クランプフランジ (重荷重仕様) CL：クランプフランジ HI：中空シャフト (絶縁された) HO：中空シャフト HT：中空シャフト (特別なトルク支持) RC：丸形フランジ (36/40 クランプフランジ、58 6-mm-シャフト付き) RE：丸形フランジ (拡張穴) RN：丸形フランジ SC：ステータカップリング SF：ネジフランジ (53 クランプフランジ、58 食品と飲料水) SI：サーボフランジ (拡張シャフト負荷とIP保護) SQ：スクエアフランジ SR：ネジフランジ (36/40 クランプフランジ、58 耐食性) SY：シンクロ (インクリメンタル)、サーボ (36)、シンクロ (58) (絶対的) TM：タコ (115 1-mm-シャフト付き、58 モーターフィードバック) TS：タコ (10-mm-シャフト)
EE	シャフト-/穴の直径 06：6 mm 07：7 mm 08：8 mm 08：8 mm 10：10 mm 11：11 mm 12：12 mm 14: 14 mm 15：15 mm 06-72：中空-/ブラインドホール (6 ... 72 mm)
FFFFFF	信号/分解能 Axxxxx：A Bxxxxx：AB Nxxxxx：ABN P16384：プログラム可能 xx：シングルターン、1 ... 16 Bit xx：マルチターン、0 ... 43 Bit (00 シングルターンの場合)
G	直流電流切断 (絶対のみ) 0：なし 1：と一緒に
HH	電力供給 (絶対のみ) 0：10 ... 32 V DC/ 直流電流分離付き 1：4.75 ... 5.5 V DC 2：18 ... 30 V DC
J	動作原理 M：磁力の O：光学的 P：光学的に補間された

製品キー

KK	インターフェース 01 : RS485 07 : SSI バイナリ 08 : SSI Gray 35 : CANopen 38 : EtherCAT 48 : PROFINET 58 : EtherNet/IP
LL	電氣的接続 M08 : 丸形プラグ M8 M12 : 丸形プラグ M12 M16 : 丸形プラグ M16 M23 : 丸形プラグ M23 M12BC : バスキャッププラグ
M	ケーブルアウトレット A : 軸方向 R : 半径方向 T : 正接の
NN	極数 xx : 極数
O	シールド接続 (2-m-ケーブル) (オプション) C : 接続済み N : 不接続
PPP	ケーブル長さ xxx : ケーブル長 (dm)

注意

	利用可能なすべてのデバイスタイプのリストは、Leuzeのウェブサイト www.leuze.com にあります。
---	--

