

# **Technical data sheet** Throughbeam photoelectric sensor transmitter

Part no.: 50140153

LS412B/D



### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Suitable receivers
- Part number code
- Notes
- Accessories









### **Technical data**



#### Basic data

Series	412B
Operating principle	Throughbeam principle
Device type	Transmitter
Special version	
Special version	Deactivation input
Optical data	
Operating range	0 10 m
Operating range	Guaranteed operating range
Operating range limit	Typical operating range

0 ... 10 m LED, Red

660 nm

Pulsed

Exempt group (in acc. with EN 62471)

Light source Wavelength

LED group

Operating range limit

Transmitted-signal shape

Electrical data			
Protective circuit	Polarity reversal protection		
	Short circuit protected		
Performance data			
Supply voltage U <sub>B</sub>	10 36 V, DC, Incl. residual ripple		
Residual ripple	0 20 %, From U <sub>B</sub>		
Open-circuit current	0 15 mA		
Inputs			
Number of deactivation inputs	1 Piece(s)		
Deactivation inputs			
Voltage type	DC		
Deactivation input 1 Active switching state	Low		

#### Connection

Connection 1	
Function	Signal IN
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PVC
Cable color	Black
Number of conductors	3 -wire
Wire cross section	0.34 mm²

#### Mechanical data

Thread size	M12 x 1 mm
Dimension (Ø x L)	12 mm x 51 mm
Housing material	Metal
Metal housing	Chromed brass
Lens cover material	Glass
Net weight	100 g
Housing color	Silver

#### **Environmental data**

Ambient temperature,	operation	-25 55 °C

#### Certifications

Degree of protection	IP 67
Protection class	III
Certifications	c UL US
Standards applied	IEC 60947-5-2


#### Classification

Customs tariff number	85365019
ECLASS 5.1.4	27270901
ECLASS 8.0	27270901
ECLASS 9.0	27270901
ECLASS 10.0	27270901
ECLASS 11.0	27270901
ECLASS 12.0	27270901
ECLASS 13.0	27270901
ECLASS 14.0	27270901
ETIM 5.0	EC002716
ETIM 6.0	EC002716
ETIM 7.0	EC002716
ETIM 8.0	EC002716
ETIM 9.0	EC002716

### **Dimensioned drawings**



All dimensions in millimeters

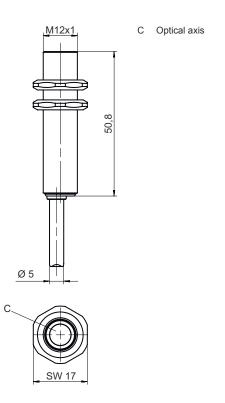

### **Electrical connection**

### **Connection 1**

Function	Signal IN
	Voltage supply
Type of connection	Cable
Cable length	2,000 mm
Sheathing material	PVC
Cable color	Black
Number of conductors	3 -wire
Wire cross section	0.34 mm²
Conductor color	Conductor assignment
D	No.
Brown	V+
Black	IN 1
Blue	GND

### Suitable receivers

	Part no.	Designation	Article	Description
- GES	50140158	LE412B/2	Throughbeam photoelectric sensor receiver	Operating range limit: 0 10 m Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, NPN, Light switching Switching frequency: 1,000 Hz Connection: Cable, 2,000 mm, 3 -wire

### Suitable receivers



	Part no.	Designation	Article	Description
- CÉS	50140154	LE412B/4	Throughbeam photoelectric sensor receiver	Operating range limit: 0 10 m Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, PNP, Light switching Switching frequency: 1,000 Hz Connection: Cable, 2,000 mm, 3 -wire
- CÉS	50140159	LE412B/N	Throughbeam photoelectric sensor receiver	Operating range limit: 0 10 m Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, NPN, Dark switching Switching frequency: 1,000 Hz Connection: Cable, 2,000 mm, 3 -wire
- CÉS	50140155	LE412B/P	Throughbeam photoelectric sensor receiver	Operating range limit: 0 10 m Supply voltage: DC Digital switching outputs: 1 Piece(s) Switching output 1: Transistor, PNP, Dark switching Switching frequency: 1,000 Hz Connection: Cable, 2,000 mm, 3 -wire

### Part number code

Part designation: AAA412BGG.H/ii-K

AAA412B	Operating principle / construction LS412B: Throughbeam photoelectric sensor transmitter LE412B: Throughbeam photoelectric sensor receiver ET412B: Energetic diffuse reflection sensor PRK412B: Retro-reflective photoelectric sensor with polarization filter
GG	Light source n/a: LED L2: laser class 2
Н	Operating range adjustment 1: 270° potentiometer
ii	Switching output / function / OUT1OUT2 (OUT1 = pin 4, OUT2 = pin 2) 2: NPN transistor output, light switching N: NPN transistor output, dark switching 4: PNP transistor output, light switching P: PNP transistor output, dark switching D: Deactivation input (deactivation with low signal) X: pin not used
К	Electrical connection n/a: cable, standard length 2000 mm, 3-wire M12: M12 connector, 4-pin (plug)

info@leuze.com • www.leuze.com

### Note



 $\ ^{\mbox{\tiny $b$}}\ \mbox{A list with all available device types can be found on the Leuze website at www.leuze.com.}$ 

### **Notes**



### Observe intended use!



 $\ensuremath{^{\mbox{\tiny $\!\!\!$}}}$  This product is not a safety sensor and is not intended as personnel protection.

\$ The product may only be put into operation by competent persons.

\$ Only use the product in accordance with its intended use.

### **Accessories**



## Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
0	50113549	BT D12M.5	Mounting bracket	Diameter, inner: 12 mm  Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type Type of mounting device: Rigid Material: Stainless steel





🔖 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.