

Technisches Datenblatt Drehgeber Serieninformation

Art.-Nr.: 90000380

EI30-P 058 SF

Inhalt

- Technische Daten
- Artikelschlüssel



Abbildung kann abweichen

Serie	EI 058 SF
Grundprinzip	inkremental
Funktionsprinzip	optisch interpoliert
Flanschdurchmesser	Ø 58 mm
Flanschtyp	Schraube
Vollwelle/Hohlwelle	Hohlwelle
Wellendurchmesser	Ø 10 mm
Versorgungsspannung	10 ... 30 V DC
	4,75 ... 5,5 V DC
	5 ... 30V DC
Ausgangsschaltung	1 Vss Sin/Cos
	HTL
	HTL, inv.
	TTL
	TTL, RS422 kompatibel, inv.
Impulszahl	10000 I/U
	10240 I/U
	12000 I/U
	12500 I/U
	1440 I/U
	15000 I/U
	16384 I/U
	20000 I/U
	20480 I/U
	25000 I/U
	2880 I/U
	3000 I/U
	3600 I/U
	4000 I/U
	5760 I/U
	6000 I/U
	7200 I/U
	7500 I/U
	8000 I/U
	9182 I/U

Technische Daten

Encoder EI30 P 058 SF

Resolution

Pulses per revolution PPR	up to 25000 PPR
---------------------------	-----------------

Mechanical Data

Flange	clamping flange
Flange material	stainless steel, V4A
Housing material	stainless steel, V4A
Flange diameter	Ø 58 mm [Ø 2.283"]

Shaft(s)

Shaft material	stainless steel, V4A
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature

Shaft	Ø 10 mm [Ø 0.394"]
Shaft length	L: 18 mm [0.709"]
Max. Permissible shaft loading radial	100 N [10.197 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Bearings

Bearings type	2 precision ball bearings
Nominale service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 1 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	3600 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 3600 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL ≤ 5000 ppr: max. 200 kHz HTL ≤ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C4, C6, D4, D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany

General Data


Weight	approx. 600 g [21.164 oz]
Connections	cable outlet (TPE)
Protection rating (EN 60529)	IP67+IP69K all around. Resistance to salt mist (IEC 60068-2-11) after 672 hours.
Operating temperature	-20 °C up to +80 °C [-4 °F up to +176 °F] 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	-20 °C up to +80 °C [-4 °F up to +176 °F]

Technische Daten

Encoder EI30 P 058 SF

Cable connection A-N, A-C, axial, with 2 m cable

Minimum distance of 1.5
to sealing lip

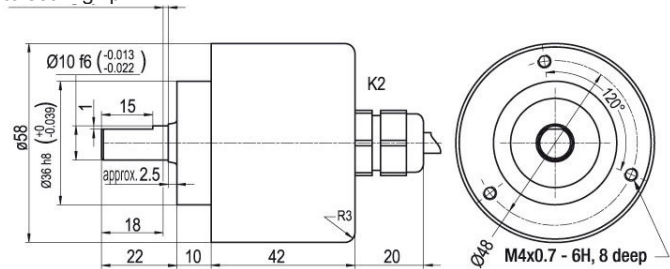

All dimensions in mm

Description		N inv. poss.
A-N	axial, shield not connected	•
A-C	axial, shield connected to encoder housing	•


Assignments			
	A-N, A-C	A-N, A-C	A-C
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	–
–	–	–	–
A inv.	–	RD	YE
B inv.	–	BU	PK
N inv.	–	VT	–
Shield	flex	flex	flex

Technische Daten

Encoder EI30 P 058 SF

Cable connection R-N, R-C, radial, with 2 m cable

Minimum distance of 1.5
to sealing lip

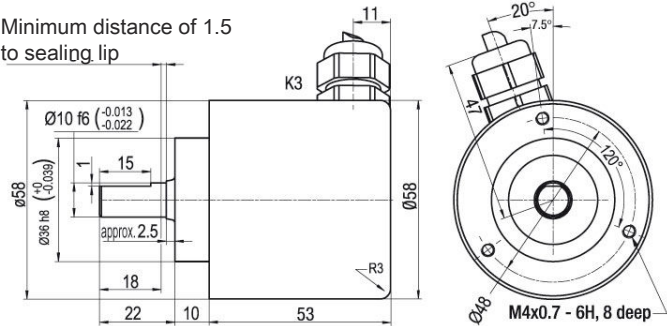

All dimensions in mm

Description		N inv. poss.
R-N	radial, shield not connected	•
R-C	radial, shield connected to encoder housing	•

Assignments			
	R-N, R-C	R-N, R-C	R-C
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	-
-	-	-	-
A inv.	-	RD	YE
B inv.	-	BU	PK
N inv.	-	VT	-
Shield	flex	flex	flex

Technische Daten

Encoder EI30 P 058 SF

Options

Cable length	Order key
The encoder EI30 P 058 SF can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency. Please extend the standard order code with a three figure number, specifying the cable length in decimetres. Example: 5 m cable = 050	XXX = Decimeter

Technische Daten

Encoder EI30 P 058 SF

Example Order No.	Type
EI30 P 058 SF	EI30 P 058 SF

Pulses per revolution PPR:

5000	2, 5, 10, 15, 20, 25, 30, 36, 40, 48, 50, 60, 64, 72, 90, 100, 120, 125, 128, 150, 160, 180, 200, 216, 240, 250, 254, 256, 300, 314, 320, 360, 400, 500, 512, 571, 600, 720, 750, 768, 800, 900, 1000, 1024, 1200, 1250, 1270, 1440, 1500, 1800, 2000, 2048, 2400, 2500, 2880, 3000, 3600, 4000, 4096, 4685, 5000, 5760, 6000, 7200, 7500, 8000, 8192, 10000, 10240, 12000, 12500, 15000, 16384, 20000, 20480, 25000 1 Vpp Sin/Cos only 1024, 2048 Other PPRs on request
------	--

Channels:

N	B, N (SIN: B)
---	---------------

Output circuit

Resolution PPR	Power supply VDC	Output circuit	-	Order key
up to 2500	5 - 30	HTL (TTL at 5 VDC)	–	C7
	5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	–	D7
up to 5000	4.75 - 5.5	TTL	–	C5
	4.75 - 5.5	TTL, RS422 comp., inverted	–	D5
	10 - 30	HTL	–	C6
	10 - 30	HTL inverted	–	D6
	10 - 30	TTL, RS422 comp., inverted	–	C1
	10 - 30	TTL, RS422 comp., inverted	–	D3
(higher frequency) 1200 up to 25000	4.75 - 5.5	TTL	–	C3
	4.75 - 5.5	TTL, RS422 comp., inverted	–	D3
	10 - 30	HTL	–	C4
	10 - 30	HTL inverted	–	D4
1024, 2048	4.75 - 5.5	TTL, RS422 comp., inverted	–	C2
	4.75 - 5.5	1 Vpp sin/cos	–	D8

Electrical connections

Description	N inv. poss.	Order key
Cable: length (2 m standard)		
axial, shield not connected	•	A-N
axial, shield connected to encoder housing	•	A-C
radial, shield not connected	•	R-N
radial, shield connected to encoder housing	•	R-C

Options

Description	Order key
Without option	Empty
Cable length	XXX = Decimeter

Example Order No.:	EI30P058SF	10	5000	N	C6	A-N	EI30P058SF	Your encoder
--------------------	------------	----	------	---	----	-----	------------	--------------

Artikelschlüssel

Artikelbezeichnung: **EABB CCCDDEE FFFFFFF GHJJKK LLMNNOPPP RR**

A	Drehgebertyp I: Inkremental S: Absolut, Singleturn M: Absolut, Multiturn
BB	Serie 10: Entry 30: Basic 50: Extended 70: Advanced
CCC	Flanschdurchmesser 024: 24 mm 036: 36 mm 058: 58 mm 063: 63 mm 067: 67 mm 070: 70 mm 080: 80 mm 100: 100 mm 115: 115 mm
DD	Flanschtyp BB: Hohlwelle mit Sacklochbohrung CA: Klemmflansch (zusätzlich 1,25") CC: Klemmflansch (kompakte Bauform) CF: Klemmflansch (Lebensmittel und Getränke) CH: Klemmflansch (Schwerlastausführung) CL: Klemmflansch HI: Hohlwelle (isoliert) HO: Hohlwelle HT: Hohlwelle (spezielle Drehmomentstütze) RC: Rundflansch (36/40 Klemmflansch, 58 mit 6-mm-Welle) RE: Rundflansch (erweiterte Bohrungen) RN: Rundflansch SC: Statorkupplung SF: Schraubflansch (53 Klemmflansch, 58 Lebensmittel und Getränke) SI: Servoflansch (erweiterte Wellenbelastung und IP-Schutz) SQ: Quadratflansch SR: Schraubflansch (36/40 Klemmflansch, 58 korrosionsbeständig) SY: Synchro (inkremental), Servo (36), Synchro (58) (absolut) TM: Tacho (115 mit 1-mm-Welle, 58 Motorfeedback) TS: Tacho (10-mm-Welle)
EE	Wellen-/Bohrungsdurchmesser 06: 6 mm 07: 7 mm 08: 8 mm 08: 8 mm 10": 1/10-Konus, 9,25 mm (3/8") 10: 10 mm 11: 11 mm 12: 12 mm 14: 14 mm 15: 15 mm 06-72: Hohl-/Sacklochbohrung (6 ... 72 mm) 2Z: 6,35 mm (1/4") 4Z: 9,525 mm (3/8")
FFFFFF	Signal/Auflösung Axxxx: A Bxxxx: AB Nxxxx: ABN P16384: Programmierbar xx: Singleturn, 1 ... 16 Bit xx: Multiturn, 0 ... 43 Bit (00 bei Singleturn)
G	Galvanische Trennung (nur Absolut) 0: ohne 1: mit
HH	Spannungsversorgung (nur Absolut) 0": 4,75 ... 32 V DC 0: 10 ... 32 V DC/mit galvanischer Trennung 1: 4,75 ... 5,5 V DC 2: 18 ... 30 V DC
J	Funktionsprinzip M: magnetisch O: optisch P: optisch interpoliert

Artikelschlüssel

KK	Schnittstelle 01: RS485 07: SSI binär 08: SSI Gray 35: CANopen 38: EtherCAT 48: PROFINET 58: EtherNet/IP
LL	Elektrischer Anschluss M08: Rundstecker M8 M12: Rundstecker M12 M16: Rundstecker M16 M23: Rundstecker M23 M12BC: Bushaubenstecker
M	Kabelabgang A: Axial R: Radial T: Tangential
NN	Polzahl xx: Polzahl
O	Schirmanschluss (2-m-Kabel) (optional) C: angeschlossen N: nicht angeschlossen
PPP	Kabellänge xxx: Kabellänge (in dm)

Hinweis



↗ Eine Liste mit allen verfügbaren Gerätetypen finden Sie auf der Webseite von Leuze unter www.leuze.com.

