

## Technical data sheet

### Light curtain receiver

Part no.: 50119094


CML730i-R10-1440.R/CN-M12



For illustration purposes only

#### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Operation and display
- Suitable transmitters
- Part number code
- Notes
- Accessories



## Technical data

### Basic data

|                     |  |
|---------------------|--|
| Series              | 730  |
| Operating principle | Throughbeam principle                                  |
| Device type         | Receiver   |
| Contains            | Accessories for the use of the BT-2R1                  |
| Application         | Detection of transparent objects<br>Object measurement |

### Special version

|                 |   |
|-----------------|---|
| Special version | Crossed-beam scanning<br>Diagonal-beam scanning<br>Parallel-beam scanning |
|-----------------|---|

### Optical data

|                          |              |
|--------------------------|--------------|
| Measurement field length | 1,440 mm     |
| Number of beams          | 144 Piece(s) |
| Beam spacing             | 10 mm        |

### Measurement data

|                         |       |
|-------------------------|-------|
| Minimum object diameter | 20 mm |
|-------------------------|-------|

### Electrical data

|                    |   |
|--------------------|---|
| Protective circuit | Polarity reversal protection<br>Short circuit protected<br>Transient protection |
|--------------------|---|

### Performance data

|                      |  |
|----------------------|--|
| Supply voltage $U_B$ | 18 ... 30 V, DC  |
| Residual ripple      | 0 ... 15 %, From $U_B$   |
| Open-circuit current | 0 ... 350 mA, The specified values refer to the entire package consisting of transmitter and receiver. |

### Inputs/outputs selectable

|                                     |                                    |
|-------------------------------------|------------------------------------|
| Output current, max.                | 100 mA                             |
| Input resistance                    | 6,000 $\Omega$                     |
| Number of inputs/outputs selectable | 2 Piece(s)                         |
| Type                                | Inputs/outputs selectable          |
| Voltage type, outputs               | DC                                 |
| Switching voltage, outputs          | Typ. $U_B$ / 0 V                   |
| Voltage type, inputs                | DC                                 |
| Switching voltage, inputs           | high: $\geq$ 6V<br>low: $\leq$ 4 V |

### Input/output 1

|                          |      |
|--------------------------|------|
| Activation/disable delay | 1 ms |
|--------------------------|------|

### Time behavior

|                        |            |
|------------------------|------------|
| Readiness delay        | 450 ms     |
| Cycle time             | 1.59 ms    |
| Response time per beam | 10 $\mu$ s |

### Interface

|                  |         |
|------------------|---------|
| Type             | CANopen |
| CANopen Function | Process |

### Service interface

|      |         |
|------|---------|
| Type | IO-Link |
|------|---------|

### IO-Link

|          |                                       |
|----------|---------------------------------------|
| Function | Configuration via software<br>Service |
|----------|---------------------------------------|

### Connection

|                       |            |
|-----------------------|------------|
| Number of connections | 2 Piece(s) |
| Plug outlet           | Rear side  |

### Connection 1

|                    |   |
|--------------------|---|
| Function           | Configuration interface<br>Connection to transmitter<br>Signal IN<br>Signal OUT<br>Voltage supply |
| Type of connection | Connector   |
| Thread size        | M12   |
| Type               | Male  |
| Material           | Metal   |
| No. of pins        | 8 -pin  |
| Encoding           | A-coded   |

### Connection 2

|                    |                   |
|--------------------|-------------------|
| Function           | BUS IN<br>BUS OUT |
| Type of connection | Connector         |
| Thread size        | M12               |
| Type               | Female            |
| Material           | Metal             |
| No. of pins        | 5 -pin            |
| Encoding           | A-coded           |

### Mechanical data

|                       |   |
|-----------------------|---|
| Design                | Cubic   |
| Dimension (W x H x L) | 29 mm x 35.4 mm x 1,463 mm                      |
| Housing material      | Metal   |
| Metal housing         | Aluminum  |
| Lens cover material   | Plastic   |
| Net weight            | 1,650 g   |
| Housing color         | Silver  |
| Type of fastening     | Groove mounting<br>Via optional mounting device |

### Operation and display

|                       |                      |
|-----------------------|----------------------|
| Type of display       | LED<br>OLED display  |
| Number of LEDs        | 2 Piece(s)           |
| Type of configuration | Software<br>Teach-in |
| Operational controls  | Membrane keyboard    |

### Environmental data

|                                |               |
|--------------------------------|---------------|
| Ambient temperature, operation | -30 ... 60 °C |
| Ambient temperature, storage   | -40 ... 70 °C |

### Certifications


|                      |               |
|----------------------|---------------|
| Degree of protection | IP 65         |
| Protection class     | III           |
| Approvals            | c UL US       |
| Standards applied    | IEC 60947-5-2 |

## Technical data

|                       |          |
|-----------------------|----------|
| Customs tariff number | 90314990 |
| ECLASS 5.1.4          | 27270910 |
| ECLASS 8.0            | 27270910 |
| ECLASS 9.0            | 27270910 |
| ECLASS 10.0           | 27270910 |
| ECLASS 11.0           | 27270910 |
| ECLASS 12.0           | 27270910 |
| ECLASS 13.0           | 27270910 |
| ECLASS 14.0           | 27270910 |
| ECLASS 15.0           | 27270910 |
| ETIM 5.0              | EC002549 |
| ETIM 6.0              | EC002549 |
| ETIM 7.0              | EC002549 |
| ETIM 8.0              | EC002549 |
| ETIM 9.0              | EC002549 |
| ETIM 10.0             | EC002549 |

## Dimensioned drawings

All dimensions in millimeters

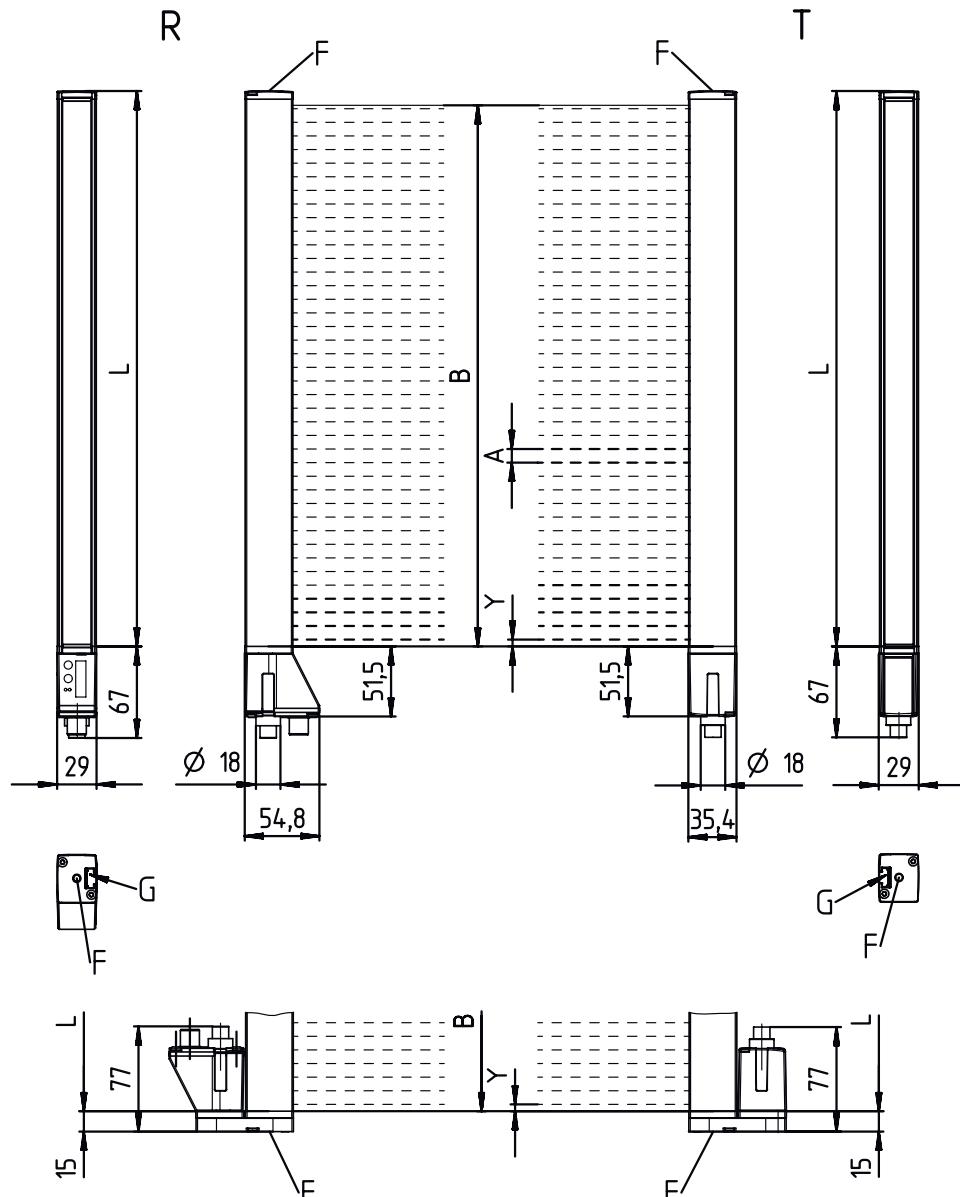


- A Beam spacing 10 mm
- B Measurement field length 1440 mm
- F M6 thread
- G Fastening groove

L Profile length 1448 mm  
T Transmitter  
R Receiver  
Y 5 mm

We reserve the right to make technical changes

## Dimensioned drawings

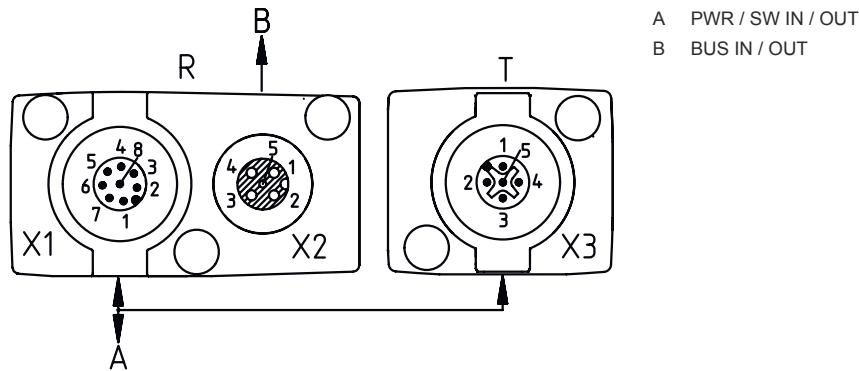



## Electrical connection

### Connection 1

|                    |   |
|--------------------|---|
| Function           | Configuration interface<br>Connection to transmitter<br>Signal IN<br>Signal OUT<br>Voltage supply |
| Type of connection | Connector   |
| Thread size        | M12   |
| Type               | Male  |
| Material           | Metal   |
| No. of pins        | 8 -pin  |
| Encoding           | A-coded   |

| Pin | Pin assignment |
|-----|----------------|
| 1   | V+             |
| 2   | I/O 1          |
| 3   | GND            |
| 4   | IO-Link        |
| 5   | I/O 2          |
| 6   | RS 485 Tx+     |
| 7   | RS 485 Tx+     |
| 8   | FE/SHIELD      |




### Connection 2

|                    |                   |
|--------------------|-------------------|
| Function           | BUS IN<br>BUS OUT |
| Type of connection | Connector         |
| Thread size        | M12               |
| Type               | Female            |
| Material           | Metal             |
| No. of pins        | 5 -pin            |
| Encoding           | A-coded           |

## Electrical connection

| Pin | Pin assignment |
|-----|----------------|
| 1   | FE/SHIELD      |
| 2   | n.c.           |
| 3   | CAN GND        |
| 4   | CAN H          |
| 5   | CAN L          |



## Operation and display

| LED | Display                  | Meaning                                |
|-----|--------------------------|--|
| 1   | Green, continuous light  | Operational readiness                  |
|     | Green, flashing          | Teach / error                          |
| 2   | Yellow, continuous light | Light path free, with function reserve |
|     | Yellow, flashing         | No function reserve                    |
|     | Off                      | Object detected                        |

## Suitable transmitters

| Part no.  | Designation                     | Operating range<br>Operating range<br>limit | Description   |
|---|---------------------------------|---|---|
|   | 50118957 CML730i-T10-1440.R-M12 | 0.3 ... 9.5 m<br>0.2 ... 12 m               | Operating range: 0.3 ... 9.5 m<br>Connection: Connector, M12, Rear side, 5 -pin |
|  | 50118613 CML730i-T10-160.A-M12  | 0.3 ... 9.5 m<br>0.2 ... 12 m               | Operating range: 0.3 ... 9.5 m<br>Connection: Connector, M12, Axial, 5 -pin     |

## Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEEFFF

|             |   |
|-------------|---|
| <b>CML</b>  | <b>Operating principle</b><br>Measuring light curtain                     |
| <b>7XXi</b> | <b>Series</b><br>720i: 720i series<br>730i: 730i series                   |
| <b>Y</b>    | <b>Device type</b><br>T: transmitter<br>R: receiver                       |
| <b>ZZ</b>   | <b>Beam spacing</b><br>05: 5 mm<br>10: 10 mm<br>20: 20 mm<br>40: 40 mm    |
| <b>AAAA</b> | Measurement field length [mm], dependent on beam spacing                  |
| <b>B</b>    | <b>Equipment</b><br>A: Axial connector outlet<br>R: Rear connector outlet |

## Part number code

|  |  |
|--|--|
| CCC  | <b>Interface</b><br>L: IO-Link<br>/CN: CANopen<br>/PB: PROFIBUS<br>/PN: PROFINET<br>/CV: Analog current and voltage output<br>/D3: RS 485 Modbus |
| DDD  | <b>Special equipment</b><br>-PS: Power Setting   |
| EEE  | <b>Electrical connection</b><br>M12: M12 connector   |
| FFF  | <b>-EX: Explosion protection</b>   |
| <b>Note</b>  |  |
|  | ↳ A list with all available device types can be found on the Leuze website at <a href="http://www.leuze.com">www.leuze.com</a> .                 |

## Notes

|   |  |
|---|--|
|  | <b>Observe intended use!</b>   |
|   | <p>↳ This product is not a safety sensor and is not intended as personnel protection.</p> <p>↳ The product may only be put into operation by competent persons.</p> <p>↳ Only use the product in accordance with its intended use.</p> |

|  |  |
|--|--|
|  | <b>For UL applications:</b>  |
|  | <p>↳ For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).</p> <p>↳ These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV7 or PVVA/PVVA7)</p> |


## Accessories

### Connection technology - Connection cables



| Part no.  | Designation | Article            | Description  |
|---|-------------|--------------------|--|
|  | 50132079    | KD U-M12-5A-V1-050 | Connection cable<br>Application: Chemical resistant<br>Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC |

## Accessories

### Connection technology - Interconnection cables

| Part no.   | Designation                          | Article               | Description   |
|--|--------------------------------------|-----------------------|---|
|  | 50129781 KDS DN-M12-5A-M12-5A-P3-050 | Interconnection cable | <p>Application: Oil and lubricant resistant<br/>         Suitable for interface: DeviceNet, CANopen<br/>         Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin<br/>         Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin<br/>         Shielded: Yes<br/>         Cable length: 5,000 mm<br/>         Sheathing material: PUR</p> |

### Connection technology - Y distribution cables

| Part no.  | Designation                      | Article               | Description  |
|---|----------------------------------|-----------------------|--|
|   | 50118183 K-Y1 M12A-5m-M12A-S-PUR | Interconnection cable | <p>Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin<br/>         Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin<br/>         Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin<br/>         Shielded: Yes<br/>         Cable length fork 1: 5,000 mm<br/>         Cable length fork 2: 150 mm<br/>         Sheathing material: PUR</p>  |
|  | 50118185 K-YCN M12A-M12A-S-PUR   | Interconnection cable | <p>Suitable for interface: CANopen<br/>         Connection 1: Connector, M12, Axial, Male, A-coded, 5 -pin<br/>         Connection 2: Connector, M12, Axial, Female, A-coded, 5 -pin<br/>         Connection 3: Connector, M12, Axial, Male, A-coded, 5 -pin<br/>         Shielded: Yes<br/>         Cable length fork 1: 250 mm<br/>         Cable length fork 2: 350 mm<br/>         Sheathing material: PUR</p> |

### Connection technology - Terminating resistors

| Part no.   | Designation         | Article         | Description  |
|--|---------------------|-----------------|--|
|  | 50040099 TS 01-5-SA | Terminator plug | <p>Suitable for: DeviceNet, CANopen<br/>         Function: Bus termination<br/>         Connection 1: Connector, M12, Axial, Male, A-coded, 5 -pin</p> |

### Mounting technology - Mounting brackets

| Part no.   | Designation             | Article             | Description  |
|--|-------------------------|---------------------|--|
|  | 50142900 BT 700M.5-2SET | Mounting device set | <p>Contains: 2x mounting brackets, 1 teach template, 4 M6 x 10 screws<br/>         Design of mounting device: Bracket mounting<br/>         Fastening, at system: Through-hole mounting, T slotted hole<br/>         Mounting bracket, at device: Screw type, Sliding block<br/>         Type of mounting device: Rigid<br/>         Material: Steel</p> |

## Accessories

### Mounting technology - Swivel mounts

| Part no.   | Designation | Article | Description  |
|--|-------------|---------|--|
|  | 429029      | BT-2RG  | Mounting bracket set<br>Contains: 2x BT-R swivel mount, 2 cylinders for mounting on the light curtain<br>Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Clampable<br>Type of mounting device: Turning, 360°<br>Material: Metal, Plastic |

## Services

| Part no.  | Designation | Article    | Description  |
|---|-------------|------------|--|
|   | S981001     | CS10-S-110 | Start-up support<br>Details: Performed at location of customer's choosing, duration: max. 10 hours.<br>Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. |
|  | S981005     | CS10-T-110 | Product training<br>Details: Location and content to be agreed upon, duration: max. 10 hours.<br>Conditions: Price not including travel costs and, if applicable, accommodation expenses.  |

#### Note

|  |   |
|--|---|
|  | ↳ A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page. |
|--|---|