

기술 데이터 시트

엔코더 시리즈 정보

품목 번호: 90000390

EI30-P 067 SQ

내용

- 기술 데이터
- 제품 키워드



그림과 차이가 날 수 있습니다

인코더_시리즈	EI 067 SQ
인코더_기본 원리	증분형
인코더_작동 원리	광학 보간
인코더_플랜지 직경	Ø 67mm
인코더_플랜지 유형	스퀘어 플랜지
인코더_실축/증분축	증분축
인코더_축 직경	Ø 10mm
	Ø 7mm
	Ø 8mm
인코더_공급전압	10 ~ 30 V DC
	4.75 ... 5.5 V DC
	5 ~ 30V DC
인코더_출력 회로	HTL
	TTL
	TTL, RS422 호환
	반전 1 Vss Sin/Cos
	반전 HTL
인코더_펄스 수	10000I/U
	10240I/U
	12000I/U
	12500I/U
	1440I/U
	15000I/U
	16384I/U
	20000I/U
	20480I/U
	25000I/U
	2880I/U
	3000I/U
	3600I/U
	4000I/U
	5760I/U
	6000I/U
	7200I/U
	7500I/U
	8000I/U
	9182I/U

기술 데이터

Encoder EI30 P 067 SQ

Resolution

Pulses per revolution PPR	up to 25000 PPR
---------------------------	-----------------

Mechanical Data

Flange	square flange
Flange material	aluminum
Housing material	die cast aluminum, powder coated
Flange diameter	Ø 67.3 mm [Ø 2.65"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature

Shaft	Ø 6 mm [Ø 0.236"]
--------------	-------------------

Shaft length	L: 10 mm [0.394"]
--------------	-------------------

Max. Permissible shaft loading radial	220 N [22.433 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	120 N [12.236 kp]
--------------------------------------	-------------------

Shaft	Ø 7 mm [Ø 0.276"]
--------------	-------------------

Advice	Attention: No option AAO = full IP67 version
--------	--

Shaft length	L: 19 mm [0.748"]
--------------	-------------------

Max. Permissible shaft loading radial	80 N [8.157 kp]
---------------------------------------	-----------------

Max. Permissible shaft loading axial	50 N [5.098 kp]
--------------------------------------	-----------------

Shaft	Ø 8 mm [Ø 0.315"]
--------------	-------------------

Shaft length	L: 19 mm [0.748"]
--------------	-------------------

Max. Permissible shaft loading radial	220 N [22.433 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	120 N [12.236 kp]
--------------------------------------	-------------------

Shaft	Ø 9.525 mm [Ø 3/8"] Order No: 4Z
--------------	----------------------------------

Shaft length	L: 22.3 mm [0.878"]
--------------	---------------------

Max. Permissible shaft loading radial	220 N [22.433 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	120 N [12.236 kp]
--------------------------------------	-------------------

Shaft	Ø 10 mm [Ø 0.394"]
--------------	--------------------

Shaft length	L: 20 mm [0.787"]
--------------	-------------------

Max. Permissible shaft loading radial	220 N [22.433 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	120 N [12.236 kp]
--------------------------------------	-------------------

Advice	Ø 12 mm [0.472"] on request
--------	-----------------------------

Bearings

Bearings type	2 precision ball bearings
Nominale service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 11 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	8000 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 8000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL ≤ 5000 ppr: max. 200 kHz HTL ≤ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	B N and inverted signals 1 Vpp Sin/Cos
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C4, C6, D4, D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany

기술 데이터

Encoder EI30 P 067 SQ

General Data


Weight	approx. 300 g [10.582 oz]
Connections	cable or connector outlet
Protection rating (EN 60529)	Housing: IP65, IP67; shaft sealed: IP65
Operating temperature	Connector: -40 °C up to +85 °C, Cable: -20 °C up to +80 °C (Option LT: -40 °C up to +85 °C). Connector: -40 °F up to +185 °F, Cable: -4 °F up to +176 °F, Option LT: -40 °F up to +185 °F 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]

General Data

Storage temperature	Connector: -40 °C up to +85 °C, Cable: -30 °C up to +80 °C (Option LT: -40 °C up to +85 °C) Connector: -40 °F up to +185 °F, cable: -22 °F up to +176 °F, (Option LT: -40 °F up to +185 °F)
---------------------	--

Cable connection A-N, A-C, axial, with 2 m cable


Ø 3/8", Ø 10 mm:

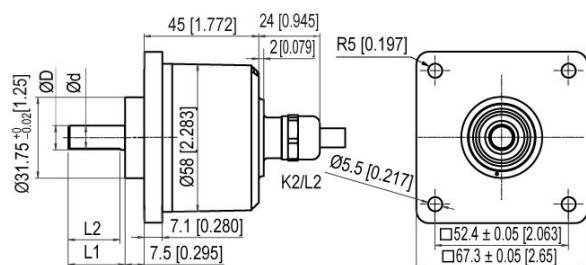

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

Description

N inv. poss.

A-N	axial, shield not connected	•
A-C	axial, shield connected to encoder housing	•

Assignments


	A-N, A-C	A-N, A-C	A-C
Circuit	C3, C4, C5, C6, C7	D3, D4, D5, D6, C1, C2, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	—
—	—	—	—
A inv.	—	RD	YE
B inv.	—	BK, (BU at LT)	PK
N inv.	—	VT	—
Shield	flex	flex	flex

기술 데이터


Encoder EI30 P 067 SQ

Cable connection R-N, R-C, radial, with 2 m cable

Ø 3/8", Ø 10 mm:

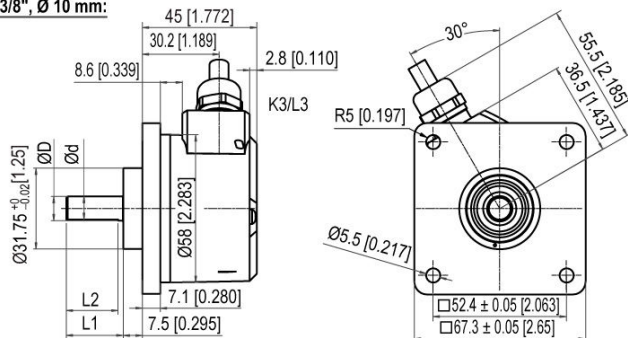

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Description

N inv. poss.

R-N radial, shield not connected

•

R-C radial, shield connected to encoder housing

•

Assignments


	R-N, R-C	R-N, R-C	R-C
Circuit	C3, C4, C5, C6, C7	D3, D4, D5, D6, C1, C2, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	–
–	–	–	–
A inv.	–	RD	YE
B inv.	–	BK, (BU at LT)	PK
N inv.	–	VT	–
Shield	flex	flex	flex

기술 데이터

Encoder EI30 P 067 SQ

Connector (M16x0.75) A, axial, 5-, 6-, 8-, 12-pin


Ø 3/8", Ø 10 mm:

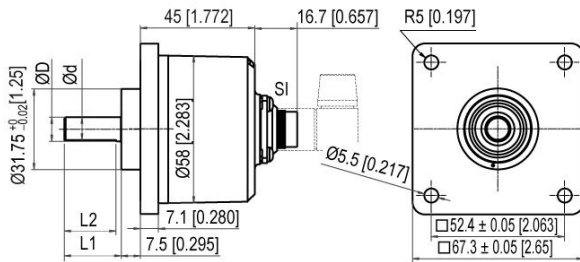

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

Description

N inv. poss.

A5	axial, 5-pin, Connector connected to encoder housing	—
A6	axial, 6-pin, Connector connected to encoder housing	—
A8	axial, 8-pin, Connector connected to encoder housing	•
A12	axial, 12-pin, Connector connected to encoder housing	•

Assignments


	A5 5-pin	A6 6-pin	A8 8-pin	A8 8-pin	A12 12-pin	A12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7	D8
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	—	C	—
—	—	—	—	—	—	—
A inv.	—	—	6	6	F	F
B inv.	—	—	7	7	A	A
N inv.	—	—	8	—	D	—
n. c.	—	5	—	5, 8	G, J	D, G, J
Shield	—	—	—	—	—	—

기술 데이터

Encoder EI30 P 067 SQ

Connector (M16x0.75) R, radial, 5-, 6-, 8-, 12-pin


Ø 3/8", Ø 10 mm:

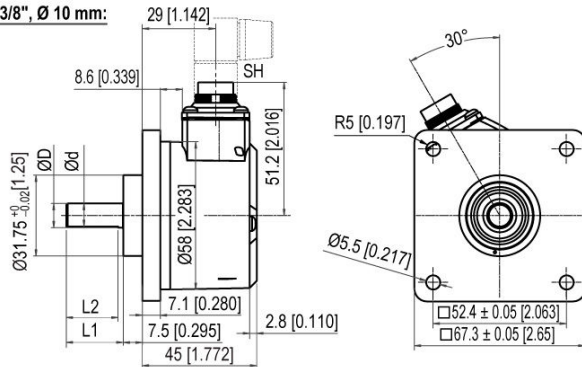

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
 D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
 D = 7f7 L1 = 19
 D = 8h8 L1 = 19 d = 7.5 L2 = 15

Description

N inv. poss.

R5	radial, 5-pin, Connector connected to encoder housing	—
R6	radial, 6-pin, Connector connected to encoder housing	—
R8	radial, 8-pin, Connector connected to encoder housing	•
R12	radial, 12-pin, Connector connected to encoder housing	•

Assignments


	R5 5-pin	R6 6-pin	R8 8-pin	R8 8-pin	R12 12-pin	R12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7	D8
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	—	C	—
—	—	—	—	—	—	—
A inv.	—	—	6	6	F	F
B inv.	—	—	7	7	A	A
N inv.	—	—	8	—	D	—
n. c.	—	5	—	5, 8	G, J	D, G, J
Shield	—	—	—	—	—	—

기술 데이터

Encoder EI30 P 067 SQ

Connector (M16x0.75) A7, axial, 7-pin


Ø 3/8", Ø 10 mm:

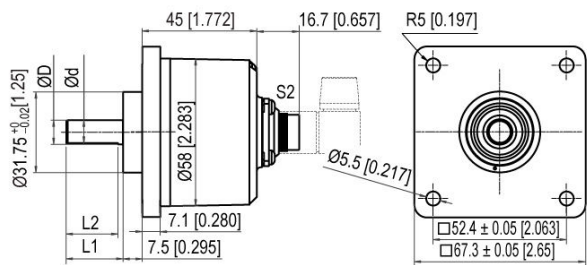

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

Description


N inv. poss.

A7 axial, 7-pin, Connector connected to encoder housing

Assignments

A7

7-pin



Circuit C3, C4, C5, C6, C7

GND 1

(+) Vcc 2

A 3

B 4

N 5

- -

A inv. -

B inv. -



N inv. -

n. c. 6, 7

Shield -

Encoder EI30 P 067 SQ

Ø 3/8", Ø 10 mm:



A diagram of a circular connector with 7 pins. The pins are arranged in a circle and labeled 1 through 7. Pin 1 is at the bottom, pin 2 is at the bottom-left, pin 3 is at the top-left, pin 4 is at the top, pin 5 is at the top-right, pin 6 is at the bottom-right, and pin 7 is in the center.


Circuit	C3, C4, C5, C6, C7
GND	1
(+) Vcc	2
A	3
B	4
N	5
–	–
A inv.	–
B inv.	–
N inv.	–
n. c.	6, 7
Shield	–

기술 데이터

Encoder EI30 P 067 SQ

Connector (M23) A12M, axial, 12-pin


Ø 3/8", Ø 10 mm:

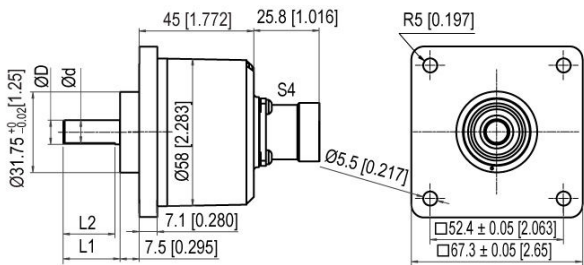

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

Description

N inv. poss.

A12M axial, 12-pin, Connector connected to encoder housing

Assignments


	A12M	A12M	A12M
	12-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	—
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	—
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	—	—	—

기술 데이터

Encoder EI30 P 067 SQ

Connector (M23) R12M, radial, 12-pin


Ø 3/8", Ø 10 mm:

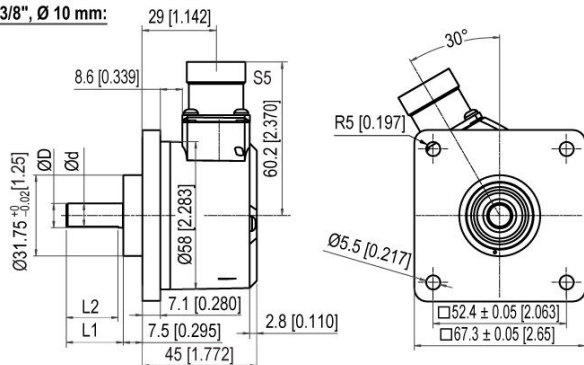

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

Description

N inv. poss.

R12M radial, 12-pin, Connector connected to encoder housing

Assignments


	R12M 12-pin	R12M 12-pin	R12M 12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	—
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	—
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	—	—	—

기술 데이터

Encoder EI30 P 067 SQ

Connector (M23) AC, axial, 12-pin (clockwise)


Ø 3/8", Ø 10 mm:

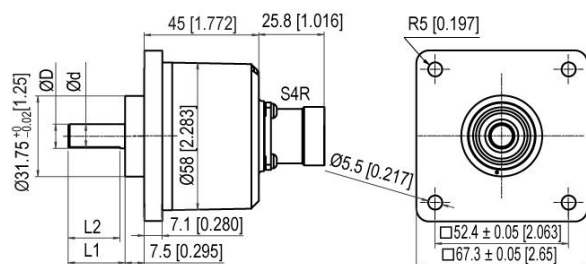

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
 D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
 D = 7f7 L1 = 19
 D = 8h8 L1 = 19 d = 7.5 L2 = 15

Description

N inv. poss.



AC12 axial, 12-pin, Connector connected to encoder housing

Assignments

	AC12 12-pin	AC12 12-pin	AC12 12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	—
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	—
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	—	—	—

Encoder EI30 P 067 SQ

Ø 3/8", Ø 10 mm:




Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	–
–	–	–	–
A inv.	–	6	6
B inv.	–	1	1
N inv.	–	4	–
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	–	–	–

기술 데이터

Encoder EI30 P 067 SQ


Sensor-connector (M12x1) AS, axial, 4-, 5-, 8-, 12-pin

Ø 3/8", Ø 10 mm:

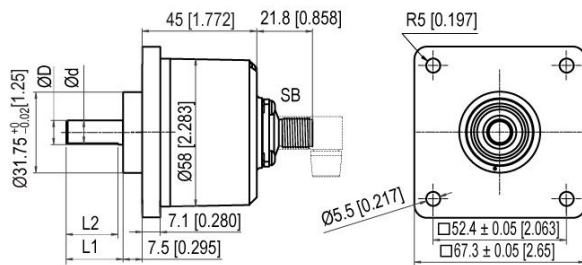

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

All dimensions in mm

Description

N inv. poss.

AS4	axial, 4-pin, Connector connected to encoder housing	—
AS5	axial, 5-pin, Connector connected to encoder housing	—
AS8	axial, 8-pin, Connector connected to encoder housing	•
AS12	axial, 12-pin, Connector connected to encoder housing	•

Assignments


	AS4 4-pin	AS5 5-pin	AS8 8-pin	AS8 8-pin	AS12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	D3, D4, D5, D6, D7, C1, C2	D8	D3, D4, D5, D6, D7, C1, C2
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	2	4	3	3	4
B	4	2	4	5	6
N	—	5	5	—	8
—	—	—	—	—	—
A inv.	—	—	6	4	9
B inv.	—	—	7	6	7
N inv.	—	—	8	—	10
n. c.	—	—	—	7, 8	2, 5, 11, 12
Shield	—	—	—	—	—

기술 데이터


Encoder EI30 P 067 SQ

Sensor-connector (M12x1) RS, radial, 4-, 5-, 8-, 12-pin

Ø 3/8", Ø 10 mm:

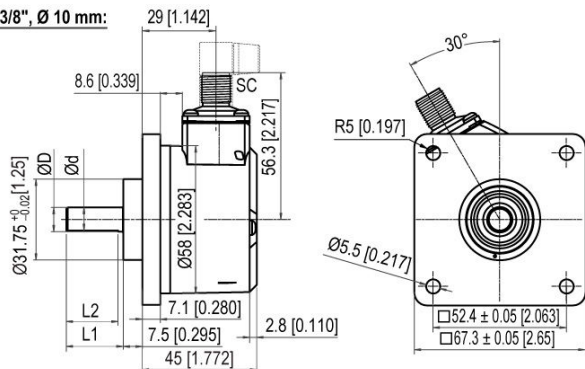

Ø 6 mm, Ø 7 mm, Ø 8 mm:



D = 6f7 L1 = 10 d = 5.5 L2 = 9
D = 7f7 L1 = 19
D = 8h8 L1 = 19 d = 7.5 L2 = 15

D = 9.525h7 [0.375] L1 = 22.3 [0.878] d = 9 [0.345] L2 = 20.3 [0.799]
D = 10f7 L1 = 20 d = 9 L2 = 15

All dimensions in mm

Description

N inv. poss.

RS4	radial, 4-pin, Connector connected to encoder housing	—
RS5	radial, 5-pin, Connector connected to encoder housing	—
RS8	radial, 8-pin, Connector connected to encoder housing	•
RS12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	RS4 4-pin	RS5 5-pin	RS8 8-pin	RS8 8-pin	RS12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	2	4	3	3	4
B	4	2	4	5	6
N	—	5	5	—	8
—	—	—	—	—	—
A inv.	—	—	6	4	9
B inv.	—	—	7	6	7
N inv.	—	—	8	—	10
n. c.	—	—	—	7, 8	2, 5, 11, 12
Shield	—	—	—	—	—

기술 데이터

Encoder EI30 P 067 SQ

Options

Low-friction bearings

Order key

The encoder EI30 P 067 SQ is also available as a particularly smooth- running low-friction encoder. The starting torque is thereby changed to ≤ 0.5 Ncm [0.708 in-ozf] and the protection class at the shaft input to IP50.

LB

IP67 Shafts sealed to IP67

The encoder EI30 P 067 SQ can be supplied in a full IP67 version. Shaft $\varnothing$ 10 mm [0.394"] without flat. IP67 not at 1 Vpp Sin/Cos. IP67 not at shaft $\varnothing$ 7 mm [0.2761"].

IP

Max. RPM: 3500 rpm
 Permitted Shaft-Loading, axial: 100 N [10.197 kp]
 Permitted Shaft-Loading, radial: 110 N [11.216 kp]
 Max. PPR: 25000 ppr
 Starting-torque: approx. 4 Ncm [5.664 in-ozf] at ambient temperature

Low temperature

Order key

The encoder EI30 P 067 SQ with the output circuit types C1, C2, C3, C4, C5, C6, D3, D4, D5, D6 is also available with the extended temperature range -40°C up to $+85^{\circ}\text{C}$ [-40°F up to $+185^{\circ}\text{F}$] (measured at the flange).

LT

Pressure equalising membrane

Order key

The EI30 P 067 SQ shaft encoder is also optionally available with a pressure equalising membrane. This prevents water from penetrating into the encoder housing in the case of high air humidity.

PE

The IP67 protection level, temperature range and salt spray resistance are maintained. Resistant to chemicals and solvents in accordance with DIN EN ISO 2812-1.

Cable length

Order key

The encoder EI30 P 067 SQ can be supplied with more than 2 m cable.
 The maximum cable length depends on the supply voltage and the frequency.

XXX = Decimeter

Please extend the standard order code with a three figure number, specifying the cable length in decimetres.
 Example: 5 m cable = 050

기술 데이터

Encoder EI30 P 067 SQ

Example Order No.	Type				
EI30 P 067 SQ	EI30 P 067 SQ	EI30 P 067 SQ			
Shaft					
4Z	06; 07; 08; 4Z; 10				
Pulses per revolution PPR:					
5000	2, 5, 10, 15, 20, 25, 30, 36, 40, 48, 50, 60, 64, 72, 90, 100, 120, 125, 128, 150, 160, 180, 200, 216, 240, 250, 254, 256, 300, 314, 320, 360, 400, 500, 512, 571, 600, 720, 750, 768, 800, 900, 1000, 1024, 1200, 1250, 1270, 1440, 1500, 1800, 2000, 2048, 2400, 2500, 2880, 3000, 3600, 4000, 4096, 4685, 5000, 5760, 6000, 7200, 7500, 8000, 8192, 10000, 10240, 12000, 12500, 15000, 16384, 20000, 20480, 25000 1 Vpp Sin/Cos only 1024, 2048 Other PPRs on request				
Channels:					
N	B, N (SIN: B)				
Output circuit					
C6	Resolution PPR	Power supply VDC	Output circuit	–	Order key
	up to 2500	5 - 30	HTL (TTL at 5 VDC)	–	C7
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	–	D7
	up to 5000	4.75 - 5.5	TTL	–	C5
		4.75 - 5.5	TTL, RS422 comp., inverted	–	D5
		10 - 30	HTL	–	C6
		10 - 30	HTL inverted	–	D6
	(higher frequency) 1200 up to 25000	10 - 30	TTL, RS422 comp., inverted	–	C1
		4.75 - 5.5	TTL	–	C3
		4.75 - 5.5	TTL, RS422 comp., inverted	–	D3
		10 - 30	HTL	–	C4
	1024, 2048	10 - 30	HTL inverted	–	D4
		10 - 30	TTL, RS422 comp., inverted	–	C2
		4.75 - 5.5	1 Vpp sin/cos	–	D8

기술 데이터

Encoder EI30 P 067 SQ

Electrical connections

	Description	N inv. poss.	Order key
A-N	Cable: length (2 m standard)		
	axial, shield not connected	•	A-N
	axial, shield connected to encoder housing	•	A-C
	radial, shield not connected	•	R-N
	radial, shield connected to encoder housing	•	R-C
	Connector: (shield connected to encoder housing)		
	connector, M16x0.75, 5-pin, axial	–	A5
	connector, M16x0.75, 5-pin, radial	–	R5
	connector, M16x0.75, 6-pin, axial	–	A6
	connector, M16x0.75, 6-pin, radial	–	R6
	connector, M16x0.75, 8-pin, axial	•	A8
	connector, M16x0.75, 8-pin, radial	•	R8
	connector, M16x0.75, 12-pin, axial	•	A12
	connector, M16x0.75, 12-pin, radial	•	R12
	connector, M16x0.75, 7-pin, axial	–	A7
	connector, M16x0.75, 7-pin, radial	–	R7
	connector, M23, 12-pin, axial	•	A12M
	connector, clockwise pin count, M23, 12-pin, axial	•	AC12
	connector, M23, 12-pin, radial	•	R12M
	connector, clockwise pin count, M23, 12-pin, radial	•	RC12
	sensor-connector, M12x1, 4-pin, axial	–	AS4
	sensor-connector, M12x1, 4-pin, radial	–	RS4
	sensor-connector, M12x1, 5-pin, axial	–	AS5
	sensor-connector, M12x1, 5-pin, radial	–	RS5
	sensor-connector, M12x1, 8-pin, axial	•	AS8
	sensor-connector, M12x1, 8-pin, radial	•	RS8
	sensor-connector, M12x1, 12-pin, axial	•	AS12
	sensor-connector, M12x1, 12-pin, radial	•	RS12

Options

Description	Order key
Low-friction bearings	LB
IP67	IP
Low temperature	LT
Pressure equalising membrane	PE
Without option	Empty
Cable length	XXX = Decimeter

Example Order No.:	EI30 P 067 SQ	4Z	5000	N	C6	A-N	EI30 P 067 SQ	Your encoder
---------------------------	---------------	----	------	---	----	-----	---------------	---------------------

제품 키워드

제품 명칭: EABB CCCDDEE FFFFFFF GHJJKK LLMNNOPPP RR

A	회전 센서 유형 I: 증분형 S: 절대형, 싱글턴 M: 절대형, 멀티턴
BB	시리즈 10: Entry 30: 기본 50: 확장형 70: Advanced
CCC	플랜지 직경 024: 24mm 036: 36mm 058: 58mm 063: 63mm 067: 67mm 070: 70mm 080: 80mm 100: 100 mm 115: 115 mm
DD	플랜지 유형 BB: 막힌 구멍 보어가 있는 중공축 CC: 클램핑 플랜지(컴팩트형) CF: 클램핑 플랜지(식품 및 음료용) CH: 클램핑 플랜지(중하중형) CL: 클램핑 플랜지 HI: 중공축(절연) HO: 중공축 HT: 중공축(특수 토크 지지대) RC: 원형 플랜지(36/40 클램핑 플랜지, 58은 6 mm 축 적용) RE: 원형 플랜지(확장 홀) RN: 원형 플랜지 SC: 스테이터 커플링 SF: 나사식 플랜지(53 클램핑 플랜지, 58 식품 및 음료용) SI: 서보 플랜지(증가된 축 하중 및 IP 보호) SQ: 스퀘어 플랜지 SR: 나사식 플랜지(36/40 클램핑 플랜지, 58 내식형) SY: 싱크로(증분형), 서보(36), 싱크로(58)(절대형) TM: 타코(115, 1mm 축, 58 모터 피드백) TS: 타코(10mm 축)
EE	축/보어 직경 06: 6mm 07: 7mm 08: 8mm 08: 8mm 10: 10mm 11: 11mm 12: 12mm 14: 14mm 15: 15 mm 06-72: 중공축/막힌 구멍 보어(6 ~ 72mm)
FFFFFF	신호/분해능 Axxxxx: A Bxxxxx: AB Nxxxxx: ABN P16384: 프로그래밍 가능 xx: 싱글턴, 1 ~ 16비트 xx: 멀티턴, 0 ~ 43비트(싱글턴의 경우 00)
G	갈바닉 절연(절대형에 한함) 0: 제외 1: 있음
HH	전원 공급(절대형에 한함) 0: 10 ~ 32V DC/갈바닉 절연 1: 4.75 ~ 5.5V DC 2: 18 ~ 30V DC
J	작동 원리 M: 자기식 O: 광학 방식 P: 광학 보간

제품 키워드

KK	인터페이스 01: RS485 07: SSI 2진 08: SSI Gray 35: CANopen 38: EtherCAT 48: PROFINET 58: EtherNet/IP
LL	전기 연결 M08: 원형 커넥터 M8 M12: 원형 커넥터 M12 M16: 원형 커넥터 M16 M23: 원형 커넥터 M23 M12BC: 버스 커넥터
M	케이블 출구 A: 액시얼 R: 레이디얼 T: 접선형
NN	핀 개수 xx: 핀 개수
O	차폐 연결(2m 케이블)(옵션) C: 연결됨 N: 연결되지 않음
PPP	케이블 길이 xxx: 케이블 길이(단위: dm)

참고

	제공되는 모든 장치 유형 목록은 로이체의 웹 사이트 www.leuze.com 을 참조하십시오.
---	---

