

技術データシート

エンコーダ シリーズ情報

製品番号: 90000400

EI30-P 070 CL

目次

- 仕様書
- 製品キー



写真と異なる場合があります

エンコーダ_シリーズ	EI 070 CL
エンコーダ_基本原理	インクリメンタル
エンコーダ_動作原理	光学的に補間された
エンコーダ_フランジ直径	Ø 70 mm
エンコーダ_フランジタイプ	固定フランジ
エンコーダ_中実シャフト/中空シャフト	中実シャフト
エンコーダ_シャフト直径	Ø 12 mm
エンコーダ_供給電圧	10 ... 30 V DC
	4.75 ... 5.5 V DC
	5 ... 30V DC
エンコーダ_出力スイッチ	1 Vss Sin/Cos
	HTL
	HTL、inv.
	TTL
	TTL、RS422 互換性、inv.
エンコーダ_インパルス数	10000 I/U
	10240 I/U
	12000 I/U
	12500 I/U
	1440 I/U
	15000 I/U
	16384 I/U
	20000 I/U
	20480 I/U
	25000 I/U
	2880 I/U
	3000 I/U
	3600 I/U
	4000 I/U
	5760 I/U
	6000 I/U
	7200 I/U
	7500 I/U
	8000 I/U
	9182 I/U

仕様書

Encoder EI30 P 070 CL

Resolution

Pulses per revolution PPR	up to 25000 PPR
---------------------------	-----------------

Mechanical Data

Flange	clamping flange
Flange material	aluminum
Housing material	die cast aluminum, powder coated
Flange diameter	Ø 70 mm [Ø 2.756"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature

Shaft	Ø 12 mm [Ø 0.472"]
Shaft length	L: 26 mm [1.024"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	150 N [15.295 kp]

Bearings

Bearings type	2 precision ball bearings
Nominale service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 11 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	8000 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 8000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL ≤ 5000 ppr: max. 200 kHz HTL ≤ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C4, C6, D4, D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrial Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany


General Data

Weight	approx. 380 g [13.404 oz]
Connections	cable or connector outlet
Protection rating (EN 60529)	Housing: IP65, IP67; shaft sealed: IP65
Operating temperature	Connector: -40 °C up to +85 °C, Cable: -20 °C up to +80 °C (Option LT: -40 °C up to +85 °C). Connector: -40 °F up to +185 °F, Cable: -4 °F up to +176 °F, Option LT: -40 °F up to +185 °F 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	Connector: -40 °C up to +85 °C, Cable: -30 °C up to +80 °C (Option LT: -40 °C up to +85 °C) Connector: -40 °F up to +185 °F, cable: -22 °F up to +176 °F, (Option LT: -40 °F up to +185 °F)

仕様書

Encoder EI30 P 070 CL

Cable connection A-N, A-C, axial, with 2 m cable

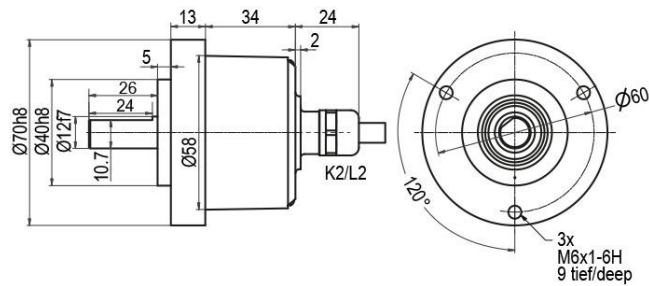

All dimensions in mm


Description		N inv. poss.
A-N	axial, shield not connected	•
A-C	axial, shield connected to encoder housing	•

Assignments			
Circuit	A-N, A-C	A-N, A-C	A-C
	C3, C4, C5, C6, C7	D3, D4, D5, D6, C1, C2, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	–
–	–	–	–
A inv.	–	RD	YE
B inv.	–	BK, (BU at LT)	PK
N inv.	–	VT	–
Shield	flex	flex	flex

仕様書

Encoder EI30 P 070 CL

Cable connection R-N, R-C, radial, with 2 m cable

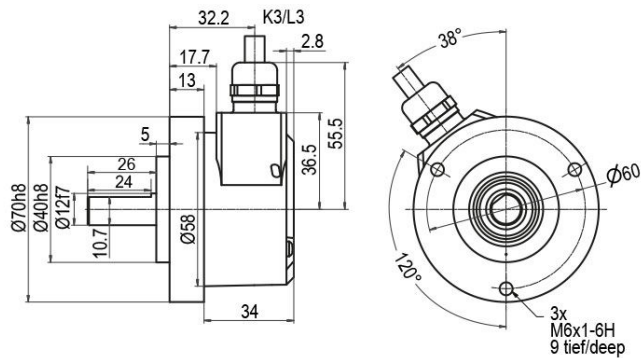

All dimensions in mm


Description		N inv. poss.
R-N	radial, shield not connected	•
R-C	radial, shield connected to encoder housing	•

Assignments			
	R-N, R-C	R-N, R-C	R-C
Circuit	C3, C4, C5, C6, C7	D3, D4, D5, D6, C1, C2, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	–
–	–	–	–
A inv.	–	RD	YE
B inv.	–	BK, (BU at LT)	PK
N inv.	–	VT	–
Shield	flex	flex	flex

仕様書

Encoder EI30 P 070 CL

Connector (M16x0.75) A, axial, 5-, 6-, 8-, 12-pin

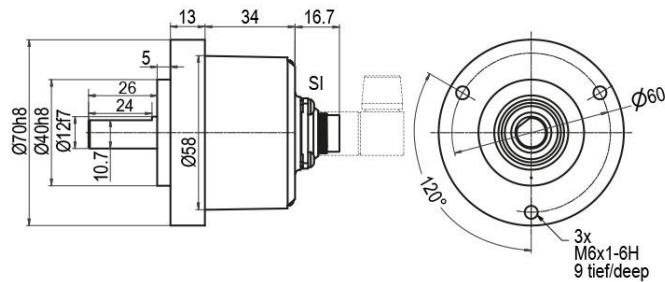

All dimensions in mm

Description		N inv. poss.
A5	axial, 5-pin, Connector connected to encoder housing	—
A6	axial, 6-pin, Connector connected to encoder housing	—
A8	axial, 8-pin, Connector connected to encoder housing	•
A12	axial, 12-pin, Connector connected to encoder housing	•


Assignments

	A5	A6	A8	A8	A12	A12
	5-pin	6-pin	8-pin	8-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7	D8
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	—	C	—
—	—	—	—	—	—	—
A inv.	—	—	6	6	F	F
B inv.	—	—	7	7	A	A
N inv.	—	—	8	—	D	—
n. c.	—	5	—	5, 8	G, J	D, G, J
Shield	—	—	—	—	—	—

仕様書

Encoder EI30 P 070 CL

Connector (M16x0.75) R, radial, 5-, 6-, 8-, 12-pin

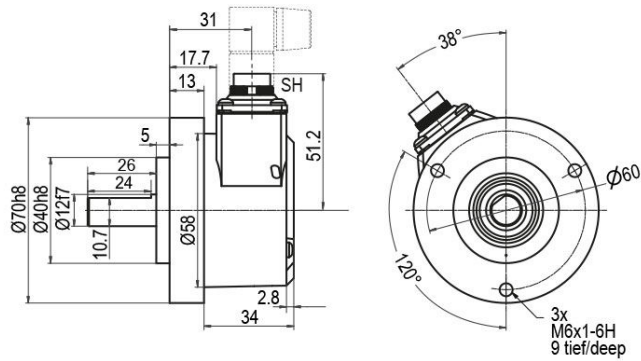

All dimensions in mm

Description		N inv. poss.
R5	radial, 5-pin, Connector connected to encoder housing	—
R6	radial, 6-pin, Connector connected to encoder housing	—
R8	radial, 8-pin, Connector connected to encoder housing	•
R12	radial, 12-pin, Connector connected to encoder housing	•


Assignments

	R5	R6	R8	R8	R12	R12
	5-pin	6-pin	8-pin	8-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7	D8
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	—	C	—
—	—	—	—	—	—	—
A inv.	—	—	6	6	F	F
B inv.	—	—	7	7	A	A
N inv.	—	—	8	—	D	—
n. c.	—	5	—	5, 8	G, J	D, G, J
Shield	—	—	—	—	—	—

仕様書

Encoder EI30 P 070 CL

Connector (M16x0.75) A7, axial, 7-pin

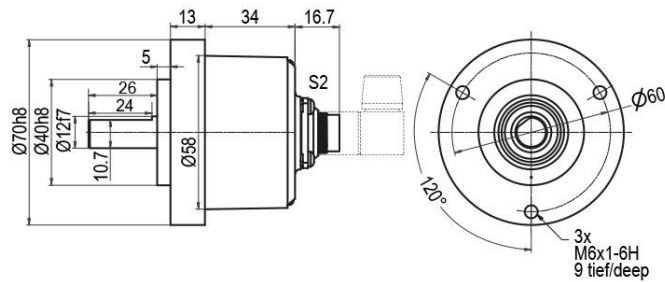

All dimensions in mm

Description


N inv. poss.

A7 axial, 7-pin, Connector connected to encoder housing

Assignments

A7

7-pin




Circuit	C3, C4, C5, C6, C7
GND	1
(+) Vcc	2
A	3
B	4
N	5
—	—
A inv.	—
B inv.	—
N inv.	—
n. c.	6, 7
Shield	—

仕様書

Encoder EI30 P 070 CL

Connector (M16x0.75) R7, radial, 7-pin

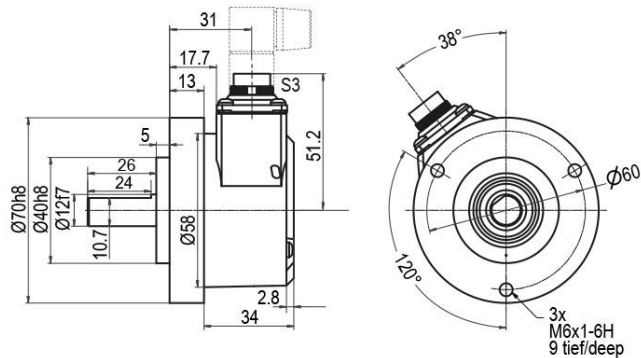

All dimensions in mm

Description

N inv. poss.

R7 radial, 7-pin, Connector connected to encoder housing

—

Assignments

R7

7-pin




Circuit	C3, C4, C5, C6, C7
GND	1
(+) Vcc	2
A	3
B	4
N	5
—	—
A inv.	—
B inv.	—
N inv.	—
n. c.	6, 7
Shield	—

仕様書

Encoder EI30 P 070 CL

Connector (M23) A12M, axial, 12-pin

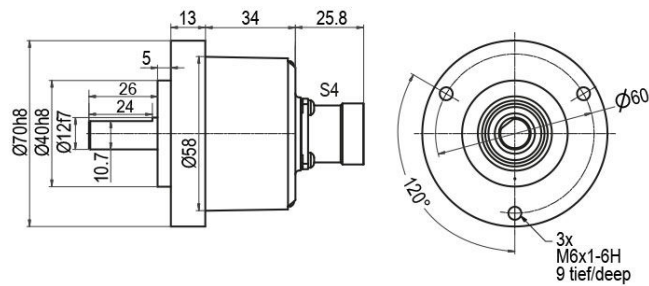

All dimensions in mm

Description N inv. poss.

A12M axial, 12-pin, Connector connected to encoder housing


Assignments

	A12M	A12M	A12M
	12-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	–
–	–	–	–
A inv.	–	6	6
B inv.	–	1	1
N inv.	–	4	
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	–	–	–

仕様書

Encoder EI30 P 070 CL

Connector (M23) R12M, radial, 12-pin

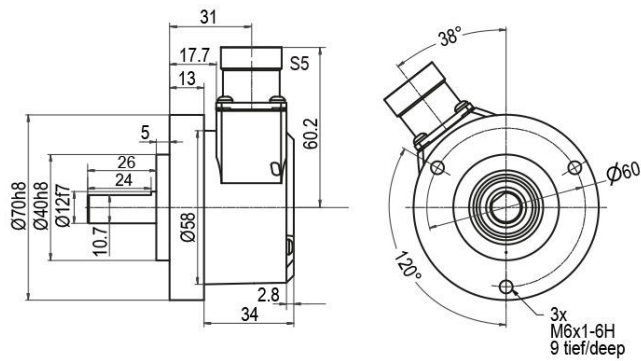

All dimensions in mm

Description

N inv. poss.

R12M radial, 12-pin, Connector connected to encoder housing


Assignments

	R12M	R12M	R12M
	12-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	–
–	–	–	–
A inv.	–	6	6
B inv.	–	1	1
N inv.	–	4	–
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	–	–	–

仕様書

Encoder EI30 P 070 CL

Connector (M23) AC, axial, 12-pin (clockwise)

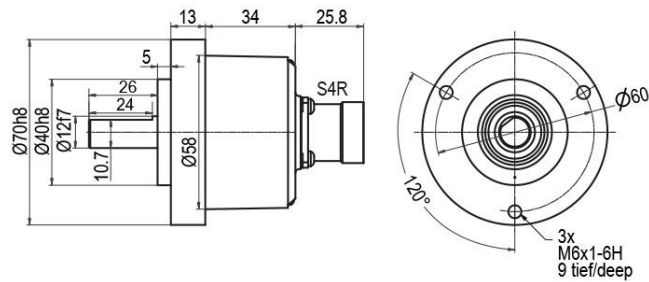

All dimensions in mm

Description

N inv. poss.

AC12 axial, 12-pin, Connector connected to encoder housing


Assignments

	AC12	AC12	AC12
	12-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	—
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	—
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	—	—	—

仕様書

Encoder EI30 P 070 CL

Connector (M23) RC, radial, 12-pin (clockwise)

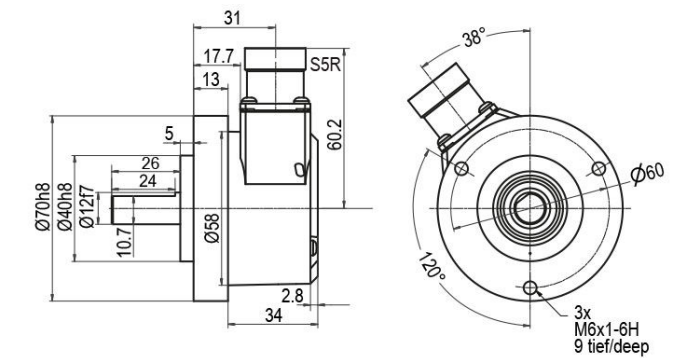

All dimensions in mm

Description

N inv. poss.

RC12 radial, 12-pin, Connector connected to encoder housing


Assignments

	RC12	RC12	RC12
	12-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	—
—	—	—	—
A inv.	—	6	6
B inv.	—	1	1
N inv.	—	4	—
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	—	—	—

仕様書

Encoder EI30 P 070 CL

Sensor-connector (M12x1) AS, axial, 4-, 5-, 8-, 12-pin

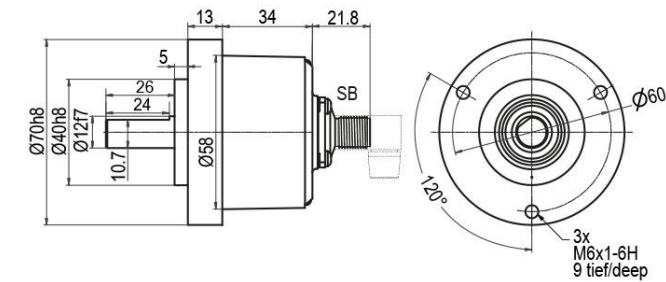

All dimensions in mm

Description		N inv. poss.
AS4	axial, 4-pin, Connector connected to encoder housing	—
AS5	axial, 5-pin, Connector connected to encoder housing	—
AS8	axial, 8-pin, Connector connected to encoder housing	•
AS12	axial, 12-pin, Connector connected to encoder housing	•


Assignments

	AS4	AS5	AS8	AS8	AS12
	4-pin	5-pin	8-pin	8-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	D3, D4, D5, D6, D7, C1, C2	D8	D3, D4, D5, D6, D7, C1, C2
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	2	4	3	3	4
B	4	2	4	5	6
N	—	5	5	—	8
—	—	—	—	—	—
A inv.	—	—	6	4	9
B inv.	—	—	7	6	7
N inv.	—	—	8	—	10
n. c.	—	—	—	7, 8	2, 5, 11, 12
Shield	—	—	—	—	—

仕様書

Encoder EI30 P 070 CL

Sensor-connector (M12x1) RS, radial, 4-, 5-, 8-, 12-pin

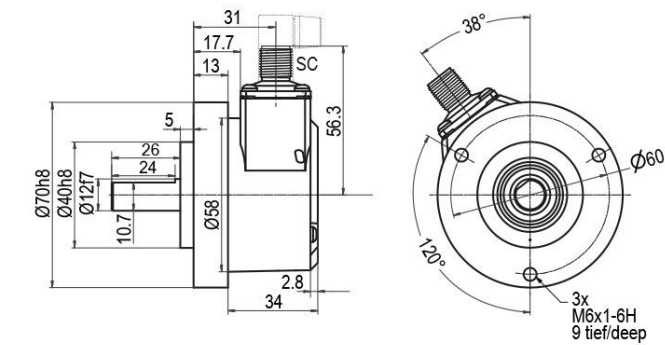

All dimensions in mm

Description		N inv. poss.
RS4	radial, 4-pin, Connector connected to encoder housing	—
RS5	radial, 5-pin, Connector connected to encoder housing	—
RS8	radial, 8-pin, Connector connected to encoder housing	•
RS12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	RS4 4-pin	RS5 5-pin	RS8 8-pin	RS8 8-pin	RS12 12-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	2	4	3	3	4
B	4	2	4	5	6
N	—	5	5	—	8
—	—	—	—	—	—
A inv.	—	—	6	4	9
B inv.	—	—	7	6	7
N inv.	—	—	8	—	10
n. c.	—	—	—	7, 8	2, 5, 11, 12
Shield	—	—	—	—	—

仕様書

Encoder EI30 P 070 CL

Options

Low-friction bearings

Order key

The encoder EI30 P 070 CL is also available as a particularly smooth- running low-friction encoder. The starting torque is thereby changed to $\leq 0.5 \text{ Ncm}$ [0.708 in-ozf] and the protection class at the shaft input to IP50.

LB

IP67 Shafts sealed to IP67 (not for 1 Vpp Sin/Cos)

The encoder EI30 P 070 CL can be supplied in a full IP67 version.

IP

Max. RPM: 3200 rpm

Permitted Shaft-Loading, axial: 110 N [11.216 kp]

Permitted Shaft-Loading, radial: 110 N [11.216 kp]

Max. PPR: 25000 ppr

Starting-torque: approx. 4 Ncm [5.664 in-ozf] at ambient temperature

Low temperature

Order key

The encoder EI30 P 070 CL with the output circuit types C1, C2, C3, C4, C5, C6, D3, D4, D5, D6 is also available with the extended temperature range $-40 \text{ }^{\circ}\text{C}$ up to $+85 \text{ }^{\circ}\text{C}$ [$-40 \text{ }^{\circ}\text{F}$ up to $+185 \text{ }^{\circ}\text{F}$] (measured at the flange).

LT

Pressure equalising membrane

Order key

The EI30 P 070 CL shaft encoder is also optionally available with a pressure equalising membrane. This prevents water from penetrating into the encoder housing in the case of high air humidity.

PE

The IP67 protection level, temperature range and salt spray resistance are maintained. Resistant to chemicals and solvents in accordance with DIN EN ISO 2812-1.

Cable length

Order key

The encoder EI30 P 070 CL can be supplied with more than 2 m cable.

XXX = Decimeter

The maximum cable length depends on the supply voltage and the frequency.

Please extend the standard order code with a three figure number, specifying the cable length in decimetres.

Example: 5 m cable = 050

仕様書

Encoder EI30 P 070 CL

Example Order No.	Type				
EI30 P 070 CL	EI30 P 070 CL	EI30 P 070 CL			
Shaft					
12	12				
Pulses per revolution PPR:					
5000	2, 5, 10, 15, 20, 25, 30, 36, 40, 48, 50, 60, 64, 72, 90, 100, 120, 125, 128, 150, 160, 180, 200, 216, 240, 250, 254, 256, 300, 314, 320, 360, 400, 500, 512, 571, 600, 720, 750, 768, 800, 900, 1000, 1024, 1200, 1250, 1270, 1440, 1500, 1800, 2000, 2048, 2400, 2500, 2880, 3000, 3600, 4000, 4096, 4685, 5000, 5760, 6000, 7200, 7500, 8000, 8192, 10000, 10240, 12000, 12500, 15000, 16384, 20000, 20480, 25000 1 Vpp Sin/Cos only 1024, 2048 Other PPRs on request				
Channels:					
N	B, N (SIN: B)				
Output circuit					
C6	Resolution PPR	Power supply VDC	Output circuit	—	Order key
	up to 2500	5 - 30	HTL (TTL at 5 VDC)	—	C7
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	—	D7
	up to 5000	4.75 - 5.5	TTL	—	C5
		4.75 - 5.5	TTL, RS422 comp., inverted	—	D5
		10 - 30	HTL	—	C6
		10 - 30	HTL inverted	—	D6
	(higher frequency) 1200 up to 25000	10 - 30	TTL, RS422 comp., inverted	—	C1
		4.75 - 5.5	TTL	—	C3
		4.75 - 5.5	TTL, RS422 comp., inverted	—	D3
		10 - 30	HTL	—	C4
		10 - 30	HTL inverted	—	D4
		10 - 30	TTL, RS422 comp., inverted	—	C2
	1024, 2048	4.75 - 5.5	1 Vpp sin/cos	—	D8

仕様書

Encoder EI30 P 070 CL

Electrical connections

Description		N inv. poss.	Order key
Cable: length (2 m standard)			
A-N	axial, shield not connected	•	A-N
	axial, shield connected to encoder housing	•	A-C
	radial, shield not connected	•	R-N
	radial, shield connected to encoder housing	•	R-C
	Connector: (shield connected to encoder housing)		
	connector, M16x0.75, 5-pin, axial	–	A5
	connector, M16x0.75, 5-pin, radial	–	R5
	connector, M16x0.75, 6-pin, axial	–	A6
	connector, M16x0.75, 6-pin, radial	–	R6
	connector, M16x0.75, 8-pin, axial	•	A8
	connector, M16x0.75, 8-pin, radial	•	R8
	connector, M16x0.75, 12-pin, axial	•	A12
	connector, M16x0.75, 12-pin, radial	•	R12
	connector, M16x0.75, 7-pin, axial	–	A7
	connector, M16x0.75, 7-pin, radial	–	R7
	connector, M23, 12-pin, axial	•	A12M
	connector, clockwise pin count, M23, 12-pin, axial	•	AC12
	connector, M23, 12-pin, radial	•	R12M
	connector, clockwise pin count, M23, 12-pin, radial	•	RC12
	sensor-connector, M12x1, 4-pin, axial	–	AS4
	sensor-connector, M12x1, 4-pin, radial	–	RS4
	sensor-connector, M12x1, 5-pin, axial	–	AS5
	sensor-connector, M12x1, 5-pin, radial	–	RS5
	sensor-connector, M12x1, 8-pin, axial	•	AS8
	sensor-connector, M12x1, 8-pin, radial	•	RS8
	sensor-connector, M12x1, 12-pin, axial	•	AS12
	sensor-connector, M12x1, 12-pin, radial	•	RS12

Options

Description	Order key
Low-friction bearings	LB
IP67	IP
Low temperature	LT
Pressure equalising membrane	PE
Without option	Empty
Cable length	XXX = Decimeter

Example Order No.:	EI30 P 070 CL	12	5000	N	C6	A-N	EI30 P 070 CL	Your encoder
--------------------	---------------	----	------	---	----	-----	---------------	--------------

製品キー

製品名：EABB CCCDDEE FFFFFFF GHJJKK LLMNNOPPP RR

A	回転エンコーダのタイプ I：インクリメンタル S：絶対的、シングルターン M：絶対、マルチターン
BB	シリーズ 10：入力 30：ベーシック 50：拡張済み 70：先進的
CCC	フランジ直径 024：24 mm 036：36 mm 058：58 mm 063：63 mm 067：67 mm 070：70 mm 080：80 mm 100: 100 mm 115：115 mm
DD	フランジタイプ BB：ブラインドホール付きの中空シャフト CC：(コンパクトな形態) CF：クランプフランジ (食品と飲料) CH：クランプフランジ (重荷重仕様) CL：クランプフランジ HI：中空シャフト (絶縁された) HO：中空シャフト HT：中空シャフト (特別なトルク支持) RC：丸形フランジ (36/40 クランプフランジ、58 6-mm-シャフト付き) RE：丸形フランジ (拡張穴) RN：丸形フランジ SC：ステータカップリング SF：ネジフランジ (53 クランプフランジ、58 食品と飲料水) SI：サーボフランジ (拡張シャフト負荷とIP保護) SQ：スクエアフランジ SR：ネジフランジ (36/40 クランプフランジ、58 耐食性) SY：シンクロ (インクリメンタル)、サーボ (36)、シンクロ (58) (絶対的) TM：タコ (115 1-mm-シャフト付き、58 モーターフィードバック) TS：タコ (10-mm-シャフト)
EE	シャフト-/穴の直径 06：6 mm 07：7 mm 08：8 mm 08：8 mm 10：10 mm 11：11 mm 12：12 mm 14: 14 mm 15：15 mm 06-72：中空-/ブラインドホール (6 ... 72 mm)
FFFFFF	信号/分解能 Axxxxx：A Bxxxxx：AB Nxxxxx：ABN P16384：プログラム可能 xx：シングルターン、1 ... 16 Bit xx：マルチターン、0 ... 43 Bit (00 シングルターンの場合)
G	直流電流切断 (絶対のみ) 0：なし 1：と一緒に
HH	電力供給 (絶対のみ) 0：10 ... 32 V DC/ 直流電流分離付き 1：4.75 ... 5.5 V DC 2：18 ... 30 V DC
J	動作原理 M：磁力の O：光学的 P：光学的に補間された

製品キー

KK	インターフェース 01 : RS485 07 : SSI バイナリ 08 : SSI Gray 35 : CANopen 38 : EtherCAT 48 : PROFINET 58 : EtherNet/IP
LL	電氣的接続 M08 : 丸形プラグ M8 M12 : 丸形プラグ M12 M16 : 丸形プラグ M16 M23 : 丸形プラグ M23 M12BC : バスキャッププラグ
M	ケーブルアウトレット A : 軸方向 R : 半径方向 T : 正接の
NN	極数 xx : 極数
O	シールド接続 (2-m-ケーブル) (オプション) C : 接続済み N : 不接続
PPP	ケーブル長さ xxx : ケーブル長 (dm)

注意

	利用可能なすべてのデバイスタイプのリストは、Leuzeのウェブサイト www.leuze.com にあります。
---	--

