

Karta danych technicznych

Informacje o serii enkoderów obrotowych

Nr art.: 90000440

EI30-P 058 HO

Treść

- Dane techniczne
- Kod artykułu



Ilustracja może się różnić od stanu rzeczywistego

Enkoder_Seria	EI 058 HO
Enkoder_Podstawowa zasada działania	inkrementalny
Enkoder_Zasada działania	optycznie interpolowany
Enkoder_Średnica kołnierza	Ø 58 mm
Enkoder_Typ kołnierza	Wał pusty
Enkoder_Wał pełny/wał pusty	Wał pusty
Enkoder_Średnica wału	Ø 10 mm
	Ø 12 mm
	Ø 14 mm
	Ø 15 mm
	Ø 6 mm
	Ø 7 mm
Enkoder_Napięcie zasilania	Ø 8 mm
	10 ... 30 V DC
	4,75 ... 5,5 V DC
	5 ... 30 V DC
Enkoder_Układ wyjściowy	1 Vss Sin/Cos
	HTL
	HTL, odwr.
	TTL
Enkoder_Liczba impulsów	TTL, kompatybilny z RS422, odwr.
	1000 I/U
	10000 I/U
	10240 I/U
	12500 I/U
	16384 I/U
	2000 I/U
	20000 I/U
	20480 I/U
	2500 I/U
	25000 I/U
	4000 I/U
	4096 I/U
	5000 I/U
	8000 I/U
	8192 I/U

Dane techniczne

Encoder EI30 P 058 HO

Resolution

Pulses per revolution PPR	up to 25000 PPR
---------------------------	-----------------

Mechanical Data

Flange	hollow shaft (blind-bored)
Flange material	aluminum
Housing material	die cast aluminum, powder coated
Torque supports	incl. 1 torque support
- 1. Spring plate compensation	axial: ± 0.8 mm [0.0315"], radial: ± 0.2 mm [0.0079"]
- Max. operating speed	6000 rpm up to max. protection rating +60 °C
- 2. Cylinder pin 4 mm	needs accessories
- Compensation	axial: ± 0.5 mm [0.0197"], radial: ± 1.5 mm [0.0591"], Max. operating speed: 3000 rpm
Flange diameter	$\varnothing$ 58 mm [$\varnothing$ 2.283"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 2.2 Ncm [3.115 in-ozf] at ambient temperature
Fixing	permanently attached clamping ring

Shaft	$\varnothing$ 6 mm [$\varnothing$ 0.236"]
Advice	with adapter sleeve
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 6.35 mm [$\varnothing$ 1/4"] Order No: 2Z
Advice	with adapter sleeve
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 7 mm [$\varnothing$ 0.276"]
Advice	with adapter sleeve
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 8 mm [$\varnothing$ 0.315"]
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]

Max. Permissible shaft loading axial	60 N [6.118 kp]
--------------------------------------	-----------------

Shaft	$\varnothing$ 9.525 mm [$\varnothing$ 3/8"] Order No: 4Z
Advice	with adapter sleeve
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 10 mm [$\varnothing$ 0.394"]
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 12 mm [$\varnothing$ 0.472"]
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 12.7 mm [$\varnothing$ 1/2"] Order No: 3Z
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 14 mm [$\varnothing$ 0.551"]
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Shaft	$\varnothing$ 15 mm [$\varnothing$ 0.591"]
Shaft length	L: 44.5 mm [1.752"]
Insertion depth min.	11 mm [0.433"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	60 N [6.118 kp]

Bearings

Bearings type	2 precision ball bearings
Nominal service life	1 x 10 ⁹ revs. at 100 % rated shaft load 1 x 10 ¹⁰ revs. at 40 % rated shaft load 1 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	6000 rpm

Dane techniczne

Encoder EI30 P 058 HO

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹¹ revs. at 20 % rated shaft load and 6000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA (100 mA only C3, D3)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only C2, C4, D4)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL ≤ 5000 ppr: max. 200 kHz HTL ≤ 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	B N and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type C4, C6, D4, D6 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	≤5000 ppr: 50 % ± max. 7 % Output circuits C2, C3, C4, D3, D4: 50 % ± max. 10 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany


General Data

Weight	approx. 220 g [7.76 oz]
Connections	cable or connector, radial
Protection rating (EN 60529)	IP65 all around
Operating temperature	Connector: -40 °C up to +85 °C, Cable: -20 °C up to +80 °C (Option LT: -40 °C up to +85 °C). Connector: -40 °F up to +185 °F, Cable: -4 °F up to +176 °F, Option LT: -40 °F up to +185 °F 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	Connector: -40 °C up to +85 °C, Cable: -30 °C up to +80 °C (Option LT: -40 °C up to +85 °C) Connector: -40 °F up to +185 °F, cable: -22 °F up to +176 °F, (Option LT: -40 °F up to +185 °F)

Dane techniczne

Encoder EI30 P 058 HO

Cable connection R-N, R-C, radial, with 2 m cable

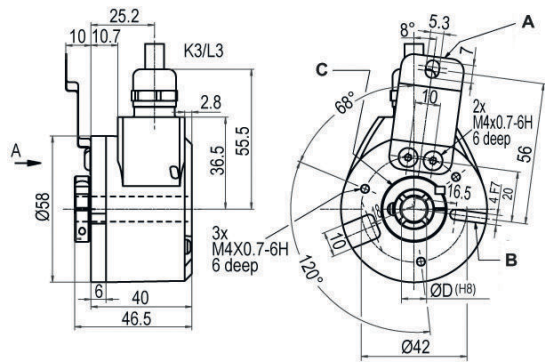


- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

All dimensions in mm

Description		N inv. poss.
R-N	radial, shield not connected	•
R-C	radial, shield connected to encoder housing	•

Assignments			
	R-NR-C	R-N, R-C	R-C
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	–
	–	–	–
A inv.	–	RD	YE
B inv.	–	BK, (BU at LT)	PK
N inv.	–	VT	–
Shield	flex	flex	flex

Connector (M16x0.75) R, radial, 5-, 6-, 8-, 12-pin

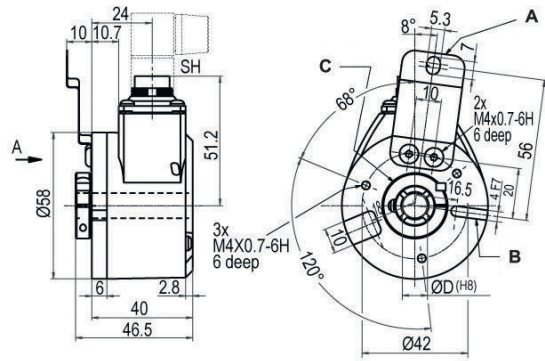

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

All dimensions in mm

R7	radial, 7-pin, Connector connected to encoder housing	–
-----------	---	---

	R12M 12-pin	R12M 12-pin	R12M 12-pin
			
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12


Dane techniczne

Encoder EI30 P 058 HO

Assignments

A	5	5	5
B	8	8	8
N	3	3	–
–	–	–	–
A inv.	–	6	6
B inv.	–	1	1
N inv.	–	4	–
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	–	–	–

Connector (M23) RC, radial, 12-pin (clockwise)

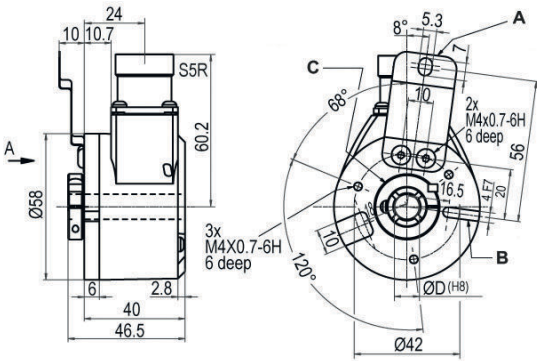

All dimensions in mm

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

Description

N inv. poss.

RC12 radial, 12-pin, Connector connected to encoder housing

Assignments

	RC12	RC12	RC12
	12-pin	12-pin	12-pin
Circuit	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	–
–	–	–	–
A inv.	–	6	6
B inv.	–	1	1
N inv.	–	4	–


Dane techniczne

Encoder EI30 P 058 HO

Assignments

n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 3, 4, 7, 9, 11
Shield	—	—	—

Sensor-connector (M12x1) RS radial, 4-, 5-, 8-, 12-pin

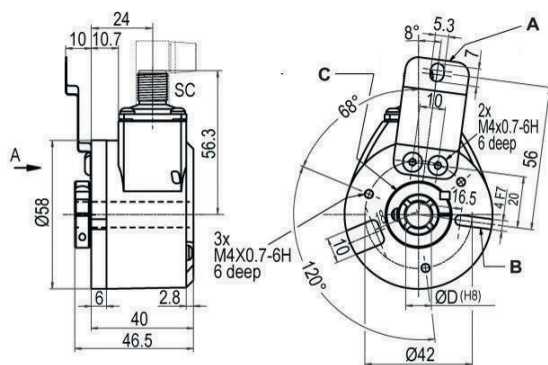

All dimensions in mm

- A Spring plate as torque support
- B Groove for cylinder pin as torque support DIN7-D4mm
- B Clamping ring

Description

N inv. poss.

RS4	radial, 4-pin, Connector connected to encoder housing	—
RS5	radial, 5-pin, Connector connected to encoder housing	—
RS8	radial, 8-pin, Connector connected to encoder housing	•
RS12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	RS5 4-pin	RS5 5-pin	RS8 8-pin	RS8 8-pin	RS8 8-pin
Circuit	C3, C4, C5, C6, C7	C3, C4, C5, C6, C7	C1, C2, D3, D4, D5, D6, D7	D8	C1, C2, D3, D4, D5, D6, D7
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	4	4	3	3	4
B	—	2	4	5	6
N	—	5	5	—	8
—	—	—	—	—	—
A inv.	—	—	6	4	9
B inv.	—	—	7	6	7
N inv.	—	—	8	—	10
n. c.	—	—	—	7, 8	2, 5, 11, 12
Shield	—	—	—	—	—

Dane techniczne

Encoder EI30 P 058 HO

Options

Low temperature	Order key
The encoder EI30 P 058 HO with the output circuit types C1, C2, C3, C4, C5, C6, D3, D4, D5, D6 is also available with the extended temperature range -40 °C up to +85 °C [-40 °F up to +185 °F] (measured at the flange).	LT
Pressure equalising membrane	Order key
The EI30 P 058 HO shaft encoder is also optionally available with a pressure equalising membrane. This prevents water from penetrating into the encoder housing in the case of high air humidity. The IP67 protection level, temperature range and salt spray resistance are maintained. Resistant to chemicals and solvents in accordance with DIN EN ISO 2812-1.	PE
Cable length	Order key
The encoder EI30 P 058 HO can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency. Please extend the standard order code with a three figure number, specifying the cable length in decimetres. Example: 5 m cable = 050	XXX = Decimeter

Dane techniczne

Encoder EI30 P 058 HO

Example Order No.	Type				
EI30 P 058 HO	EI30 P 058 HO	EI30 P 058 HO			
Bore size					
10	06; 2Z; 07; 08; 4Z; 10; 12; 3Z; 14; 15	10			
Pulses per revolution PPR:					
1024	4, 6, 25, 36, 50, 60, 64, 70, 88, 100, 120, 125, 150, 180, 200, 240, 250, 256, 300, 360, 400, 500, 512, 600, 720, 750, 768, 800, 900, 1000, 1024, 1200, 1250, 1270, 1500, 1800, 2000, 2048, 2500, 3000, 3600, 4000, 4096, 5000, 8000, 8192, 10000, 10240, 12500, 16384, 20000, 20480, 25000 1 Vpp Sin/Cos only 1024, 2048 Other pprs on request	1-16384			
Channels:					
N	B, N (SIN: B)	N			
Output circuit					
C6	Resolution PPR	Power supply VDC	Output circuit	-	Order key
	up to 2500	5 - 30	HTL (TTL at 5 VDC)	–	C7
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	–	D7
	up to 5000	4.75 - 5.5	TTL	–	C5
		4.75 - 5.5	TTL, RS422 comp., inverted	–	D5
		10 - 30	HTL	–	C6
		10 - 30	HTL inverted	–	D6
		10 - 30	TTL, RS422 comp., inverted	–	C1
	(higher frequency) 1200 up to 25000	4.75 - 5.5	TTL	–	C3
		4.75 - 5.5	TTL, RS422 comp., inverted	–	D3
		10 - 30	HTL	–	C4
		10 - 30	HTL inverted	–	D4
		10 - 30	TTL, RS422 comp., inverted	–	C2
	1024, 2048	4.75 - 5.5	1 Vpp sin/cos	–	D8

Dane techniczne

Encoder EI30 P 058 HO

Electrical connections

Description		N inv. poss.	Order key
Cable: length (2 m standard)			
R-N	radial, shield not connected	•	R-N
	radial, shield connected to encoder housing	•	R-C
	Connector: (shield connected to encoder housing)		
	connector, M16x0.75, 5-pin, radial	–	R5
	connector, M16x0.75, 6-pin, radial	–	R6
	connector, M16x0.75, 8-pin, radial	•	R8
	connector, M16x0.75, 12-pin, radial	•	R12
	connector, M16x0.75, 7-pin, radial	–	R7
	connector, M23, 12-pin, radial	•	R12M
	connector, clockwise pin count, M23, 12-pin, radial	•	RC12
	sensor-connector, M12x1, 4-pin, radial		RS4
	sensor-connector, M12x1, 5-pin, radial	–	RS5
	sensor-connector, M12x1, 8-pin, radial	•	RS8
	sensor-connector, M12x1, 12-pin, radial		RS12

Options

Description	Order key
Low-friction bearings	LB
Low temperature	LT
Pressure equalising membrane	PE
Cable length	XXX = Decimeter
Without option	Empty

Example Order No.:	EI30 P 058 HO	10	1024	N	R-N	EI30 P 058 HO	Your encoder
--------------------	---------------	----	------	---	-----	---------------	--------------

Kod artykułu

Oznaczenie artykułu: **EABB CCCDDEE FFFFFFF GHJJKK LLMNOPPP RR**

A	Typ enkodera obrotowego I: Inkrementalny S: Absolutny, Singleturn M: Absolutny, Multiturn
BB	Seria 10: Entry 30: Basic 50: Extended 70: Advanced
CCC	Średnica kołnierza 024: 24 mm 036: 36 mm 058: 58 mm 063: 63 mm 067: 67 mm 070: 70 mm 080: 80 mm 100: 100 mm 115: 115 mm
DD	Typ kołnierza BB: Wał pusty z otworem nieprzelotowym CC: Kołnierz zaciskowy (kompaktowa konstrukcja) CF: Kołnierz zaciskowy (produkty spożywcze i napoje) CH: Kołnierz zaciskowy (wersja do dużych obciążeń) CL: Kołnierz zaciskowy HI: Wał pusty (izolowany) HO: Wał pusty HT: wał pusty (specjalne ramię reakcyjne) RC: Kołnierz okrągły (36/40 kołnierz zaciskowy, 58 z wałem 6 mm) RE: Kołnierz okrągły (powiększone otwory) RN: Kołnierz okrągły SC: złącze stojana SF: Kołnierz skręcany (53 kołnierz zaciskowy, 58 produkty spożywcze i napoje) SI: Kołnierz pod serwowymotor (zwiększone obciążenie wału i stopień ochrony IP) SQ: Kołnierz kwadratowy SR: Kołnierz skręcany (36/40 kołnierz zaciskowy, 58 odporny na korozję) SY: Synchro (inkrementalny), Servo (36), Synchro (58) (absolutny) TM: Tacho (115 z wałem 1 mm, 58 motorfeedback) TS: Tacho (wał 10 mm)
EE	Średnica wału/otworu 06: 6 mm 07: 7 mm 08: 8 mm 08: 8 mm 10: 10 mm 11: 11 mm 12: 12 mm 14: 14 mm 15: 15 mm 06-72: Otwór przelotowy/nieprzelotowy (6 ... 72 mm)
FFFFFF	Sygnał/Rozdzielczość Axxxx: A Bxxxx: AB Nxxxx: ABN P16384: Programowalny xx: Singleturn, 1 ... 16 Bit xx: Multiturn, 0 ... 43 Bit (00 przy Singleturn)
G	Separacja galwaniczna (tylko absolutny) 0: bez 1: z
HH	Zasilanie napięciem (tylko absolutny) 0: 10 ... 32 V DC/z rozdzieleniem galwanicznym 1: 4,75 ... 5,5 V DC 2: 18 ... 30 V DC
J	Zasada działania M: magnetyczny O: optyczny P: optycznie interpolowany

Kod artykułu

KK	Interfejs 01: RS485 07: SSI binarny 08: SSI Gray 35: CANopen 38: EtherCAT 48: PROFINET 58: EtherNet/IP
LL	Przylącze elektryczne M08: wtyczka okrągła M8 M12: Wtyczka okrągła M12 M16: Wtyczka okrągła M16 M23: Wtyczka okrągła M23 M12BC: Wtyk obudowy magistrali
M	Wylot kablowy A: osiowy R: promieniowy T: Tangential
NN	Liczba pinów xx: Liczba pinów
O	Przylącze ekranu (kabel 2 m) (opcjonalnie) (C: podłączony N: niepodłączony
PPP	Długość kabla xxx: Długość kabla (w dm)

Wskazówka



Lista ze wszystkimi dostępnymi typami urządzeń znajduje się na stronie internetowej Leuze www.leuze.com.

